




ACHIEVING ASSEMBLY EXCELLENCE
2021
WWW.AIMCO-GLOBAL.COM

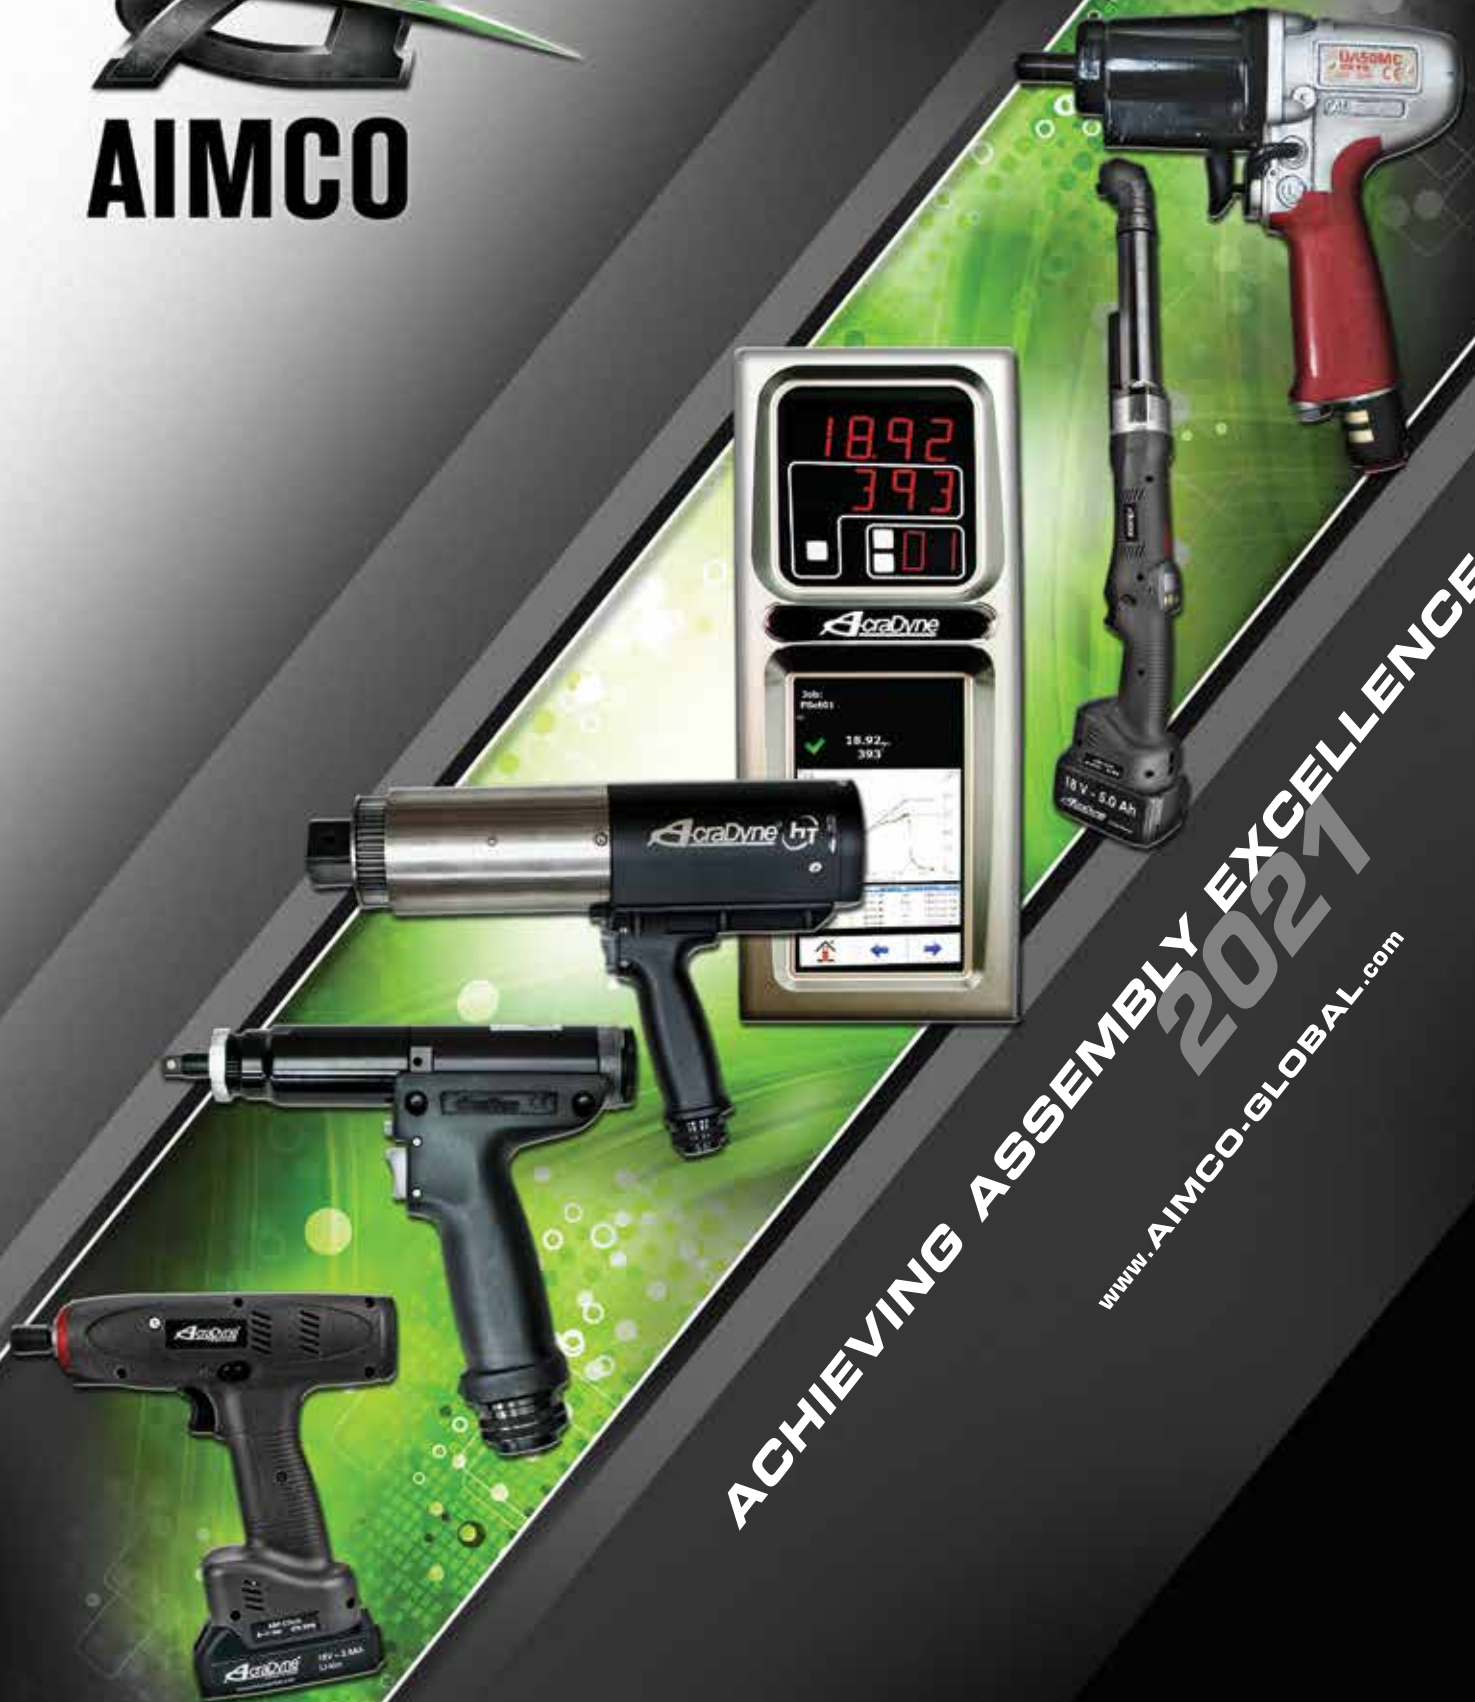

For 50 years AIMCO has been working with manufacturers around the world. We are the complete global source for all critical fastening and bolting solutions. AIMCO can effectively and swiftly meet your needs whether you're in Thailand fastening a 3 mm nut at 3 Nm, or in Tennessee, USA torquing the last lug nut. AIMCO provides the tools and solutions, on a global scale, that guarantee the success of your project. It is with great pride that AIMCO can say the products that we manufacture are **MADE IN THE USA.**

TABLE OF CONTENTS

CONTROLLED TOOLS

AcraDyne®

GEN IV ACE Controller Platform	7
Controller Software	14
GEN IV Smart Arm System with Process Visualization	15
1000 Series Nutrunners	17
2000 Series Nutrunners	21
3000 Series Nutrunners	24
5000 Series Nutrunners	26
AcraDyne Specialty Gearheads.	29
Rivet Nutrunners.	30
HT Series DC Tools	31
HT Series DC Angle Tools.	33
HT Series DC Dual-Lever Tools	36
HTXD Extreme Duty High Torque Tools	38
Gen IV Field Controller	41
HT Series Nose Extensions and Gearhead Tools	42
HT Series DC Tool Accessories	43
DC Tool / Spindle Selection Guide	44
Cables and Accessories.	46
Cordless AB Series	50
ABP Ultra Torque Cordless Series	53
Cordless XT Series.	55
Multiple Nutrunning Systems.	57
AIMCO Tool Specials	58

Uryu

Pulse Tool Overview	59
UA-MC / SMC Series	60
UA-AMC Series	61
Acra-Pulse® UXR MC / SMC Series	62
UDP-MC Series	62
UBX-AF Series	63
Uryu UEC / UECF / UCC Controllers.	65
Controlled Pulse Tool Accessories	72
Fixtured F-Series Nutrunners	73

TORQUE MEASUREMENT

Torque Measurement Overview.	77
Torque Measurement Systems	80
Torque Measurement Testers	81
Torque Measurement Analyzers	84
Auditor Data Collection Software	87
High-Capacity Test Stands	89
Torque Wrenches	94
iTVC Torque Carts	102
Transducers.	103
Rundown Fixtures	105
Joint Kits / Joint Simulators	106
Torque Measurement Cables.	107

POWER TOOLS

AcraDyne HT Series Pneumatic Tools	108
Pulse Tools: Overview.	111
Omega Pulse: UAT Series	112
Omega Pulse: UL / ULT Series.	114
Acra-Pulse® U / UX / UXR Series	116
UTM Series Fastening Counter.	117
BP-T Pulse Series Cordless Tools.	118
UBX-T Series Cordless Pulse Tools	120
UDP-TA Direct Plug-In Pulse Tools	122
UAN & URW Series Nutrunners	123
Tubenut and Gearhead Nutrunners	124
DynaTorque® Manual Torque Multipliers	125
US-LT / US / US-LD Pneumatic Screwdrivers	126
Signature Series® Shut-Off Impact Cordless Tools.	130
Signature Series® Precision Clutch Cordless Tools.	131
Electra® Series Electric Screwdrivers	134
Impact Tools	137
Grinders	139
Sanders & Drills	140
Percussion Tools.	141

ASSEMBLY SYSTEMS

Screw Presenters: Overview	142
A-50 Screw Presenters.	143
Acra-Feed® Automatic Screw Feed Systems	144
Ergo Arms®	145
Linear Arms.	147
Jib Arms	148
Carbon Torque Arms	149
Carbon Torque Tubes	152
GCI Torque Reaction Arms	154
3arm Zero Gravity Arms.	157
Support System Tool-Mounting Options	162
Workstation Components And Assemblies	163

TOOL SUPPORT SYSTEMS

Balancers / Retractors	165
Air Preparation Units	167
Air Line & Accessories	168

FASTENER TOOLS

Standard Fastener Tools	170
Ergo-Drive® Series E	174
Custom / Special Parts	176

INDEX 180



* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ERGO-DRIVE sockets are uniquely designed for repeatable, accurate rundowns. They also ensure excellent product quality, longer tool life, and better ergonomics for the tool user. Look for the ERGO-DRIVE **E** logo in this catalog to see where ERGO-DRIVE sockets/extensions benefit tool operation, operator, and rundown. See page 174 for ERGO-DRIVE details.



WHAT IS IMPORTANT IN YOUR ASSEMBLY PROCESS?

Using AIMCO's industry standard PERQ formula guarantees that we will provide the best solution to fit your needs



PRODUCTIVITY

Speed and efficiency of the assembly process

Whether a large automotive manufacturer building several hundred vehicles daily, or an electronics company producing individual, custom-made components, AIMCO provides products and services that allow each company to work at their ideal pace in order to keep its processes running efficiently.



ERGONOMICS

Relationship between the worker and the assembly process

AIMCO focuses on providing products that are lightweight, quiet, and easy to operate, with minimal torque reaction and low vibration. These features allow assemblers to do their job in the safest possible manner and help manufacturers avoid the often hidden costs of workplace injuries.



RELIABILITY

Reduced cost of repairing and maintaining the tools in the assembly process

AIMCO helps manufacturers face the challenges of maintenance, repair, and lost labor time by offering products with superior workmanship and durability. By combining high-quality products with a detailed and flexible service-training program, AIMCO ensures its tools will meet the customer's expectations of reliability.



QUALITY

The ability of the tool to meet engineering requirements of the assembly process

AIMCO's assembly tools are tested and proven to meet the most stringent engineering specifications. AIMCO backs those tools up with its innovative Auditor torque measurement products. This allows manufacturers to focus on their most important goal — creating a quality product.



AIMCO and its distributors evaluate each manufacturer based on the PERQ formula to determine that company's unique blend of the PERQ elements – productivity, ergonomics, reliability, and quality. We then provide tooling options that enhance that mix. The end result is a manufacturing process that runs efficiently, produces high quality products and does so at the lowest possible cost. Combining PERQ with AIMCO's vast experience and unequalled service will enable any manufacturer to succeed in the global marketplace.

Power Source

ELECTRIC



- Clean and quiet
- Excellent torque repeatability because of slower speeds
- Greater flexibility at low torque ranges (<3 Nm)

PNEUMATIC



- Fast operation
- Good power-to-weight ratio
- Long overall service life
- Allow more coverage at higher torque ranges (>200 Nm)

CORDLESS



- Most flexibility for a broad range of applications
- No air hoses or cords to interfere with operator

Drive Type

DISCONTINUOUS



- Fast operation
- Virtually no torque reaction
- Frees up one hand for other, simultaneous tasks
- Superior clamp load repeatability

CONTINUOUS



- Effective on a wide range of joint types from very hard to extremely soft
- Minimal maintenance
- Excellent torque repeatability because of slower speeds

Orientation & Fixturing

PISTOL



- Generally the quickest operation due to "point-and-tighten" familiarity

INLINE



- Continuous drive inline tools normally require a reaction device for applications >2.5 Nm (20 in-lb)

RIGHT ANGLE



- Good for low-clearance applications
- Continuous drive right angle tools allows highest possible torque ranges before reaction devices are required

HANDHELD



- Normally the fastest to use on individual applications

FIXTURED



- Can be fully automated, allowing operator to conduct other tasks as system operates

MULTI-SPINDLE



- High productivity rates, but speed and cost may not be justified

Correct Tool Choice



Customer Commitment

Tool University

AIMCO's commitment doesn't end with your tool purchase. Our goal is to educate you and your team on the most effective and efficient ways to utilize our tools; therefore, consistently producing a quality product.



All customers have the opportunity to attend our Tool University (Tool-U) training at our corporate headquarters in Portland, Oregon. Always free of charge to customers, your team will receive technical and practical training, learning how to effectively troubleshoot, test, and properly use the tool, which will reduce down time and help you achieve maximum tool performance.

AIMCO utilizes a team of experts to cover all elements influencing the fastening process, exploring the synergy between the joint, power tool, torque measurement, and operator handling. This knowledge can be applied to almost any assembly process regardless of the tool brand.

Service



Cutting-Edge Knowledge Base

Our skilled technicians work closely with our Technical Services group as well as our expert team of engineers, to share knowledge, keep up with new technologies, and improve processes.



Service Guarantee

When AIMCO receives tools and equipment for servicing, they are pre-tested and inspected to identify issues. We provide precise repair estimates and feedback so that the customer ensures they are getting the most out of their tool investment. Repairs are completed using factory standards, parts, and processes. Once a repair is complete, it is tested, and/or calibrated, using N.I.S.T. certified measuring equipment, and guaranteed to perform to factory specifications.



Complete Support

AIMCO helps manufacturers face the challenges of maintenance, repair, and lost labor time by offering products with superior workmanship and durability. By combining high quality products with a detailed and flexible service-training program, AIMCO ensures its tools will meet the expectations of reliability. AIMCO backs those tools with its innovative Auditor torque measurement products. This allows manufacturers to focus on their most important goal — satisfied customers.

ACRADYNE GEN IV ACE CONTROLLER PLATFORM



AcraDyne's Gen IV ACE Controller platform is a single platform that commands all transducerized tools in the AIMCO portfolio

AIR | CORDLESS | ELECTRIC



The same, simple programming for all tool types, including:

AcraDyne

- DC Tools
- Cordless Battery Tools

Uryu

- Air Powered Tools
- Electric Tools
- Pulse Tools

No additional controller training needed for different platforms (tool type specific knowledge is required)

One common communication for global data collection, line controls, and Field Bus platforms



ACRADYNE GEN IV ACE CONTROLLER PLATFORM

The AcraDyne Gen IV ACE controller platform is the culmination of more than 40 years of serving our industrial fastening customers with 15 years of designing and manufacturing DC tools that are Made in the USA. It is filled with countless advanced capabilities and features. The Gen IV ACE Controller is the core of the modular AcraDyne DC system. One controller will command any tool in the AcraDyne line from 1 Nm to 17,000 Nm, all with one cable.

Four Digit LED Torque Display:
Large numbers can be seen
from a distance.

Parameter Set Display:
Displays current
parameter set and
enables user to
quickly change by
scrolling up or down.

Secondary display allows
user to easily set and toggle
through information:

- Angle
- Engineering Units
- Bolt Count
- Job/Job Sequence

7" Touch-Screen
Display:

- Runs the same software on PC for ease of use
- Real-Time Graphing
- Selectable Run Screens




FEATURES AND BENEFITS

- Web browser based programing – Receive data on your PC, tablet, smartphone, or any other web-capable device. You can use more than one device at a time: Be in program mode on one device while reviewing real-time curves on another, while watching tool diagnostics on a third
- Multiple fastening strategies – Program up to 256 parameters with as many as 20 steps
- Jobs capability – 99. Event log – 5,000
- Backup & restore through USB or Ethernet
- Assignable I/O (8 X 8)
- Rundown storage – 1,000,000
- Real-time curve viewing. Curve storage – 20,000

NETWORKING CAPABILITIES

- Ethernet Protocols supported: Open Protocol, ToolsNet, Ethernet/IP, Modbus TCP, PFCS, XML, FTP Client
-  Anybus® Field Bus connectivity: Profibus, Profinet, DeviceNet, CC-Link, CC-Link IE Field
- Data collection
- Serial protocols and string output
- Bar code scanning & printing
- Multi-spindle synchronization

ACRADYNE GEN IV ACE CONTROLLER PLATFORM

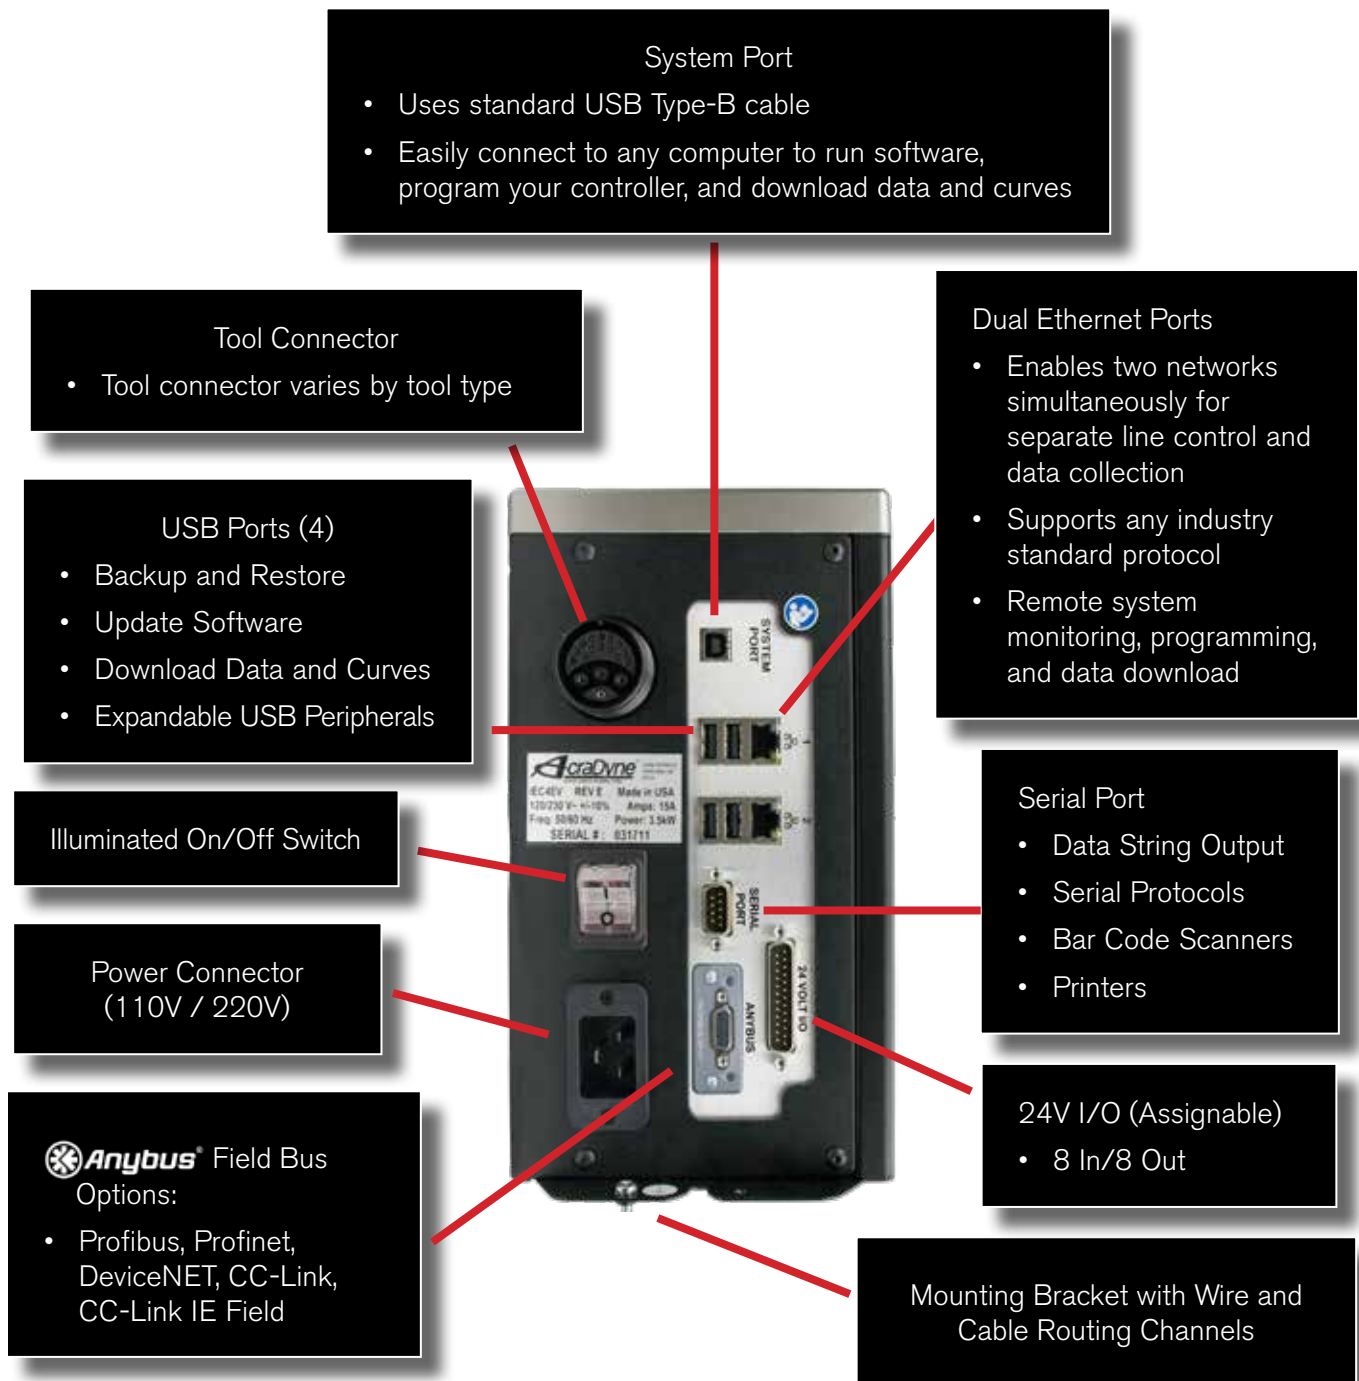

ACRADYNE GEN IV ACE CONTROLLER PLATFORM

The Gen IV ACE controller platform provides ultimate **FLEXIBILITY** and **FREEDOM** to command tools for every application

One common communication for your global data collection, line controls, and Fieldus platforms.



ACRADYNE GEN IV ACE CONTROLLER PLATFORM



GEN IV ACE iEC Controller
for all AcraDyne DC Tools



Model*	System Port & Removable Memory	Lights (L) LED Display (D) Graph (G)	24V I/O Assignable 8 X 8"	Serial Port with Protocols	Backup & Restore (USB)	Ethernet** Two Ports
Bottom Exit Cable						
iEC4EGV(P)(N)(D)(C)(M)	X	L/D/G	X	X	X	X
Top Exit Cable						
iEC4EGV(-T)(P-T)(N-T)(D-T)(C-T)(M-T)	X	L/D/G	X	X	X	X

* Field bus options: P = Profibus N = Profinet D = DeviceNet C = CC Link M = CC-Link IE Field

Other Field bus options available upon request.

** Ethernet channel supports Open Protocol, ToolsNet, EtherNet/IP, Modbus TCP, PFCs, XML, and FTP Client.



GEN IV ACE iAC Controller for
Transducerized Uryu Air Tools



Model*	System Port & Removable Memory	Lights (L) LED Display (D) Graph (G)	24V I/O Assignable 8 X 8"	Serial Port With Protocols	Backup & Restore (USB)	Solenoid Shut Off On Board	Programmable Regulator On Board	Ethernet** Two Ports
Bottom Exit Cable								
iAC4EGV(P)(N)(D)(C)(M)	X	L/D/G	X	X	X			X
iAC4ESRGV(P)(N)(D)(C)	X	L/D/G	X	X	X	X	X	X
Top Exit Cable								
iAC4EV(P-T)	X	L/D	X	X	X			X
iAC4EGV(-T)(P-T)(N-T)(D-T)(C-T)	X	L/D/G	X	X	X			X
iAC4ESRGV(-T)(P-T)(N-T)(D-T)(C-T)	X	L/D/G	X	X	X	X	X	X

* Field bus options: P = Profibus N = Profinet D = DeviceNet C = CC Link M = CC-Link IE Field

Other Field bus options available upon request.

** Ethernet channel supports Open Protocol, ToolsNet, EtherNet/IP, Modbus TCP, PFCs, XML, and FTP Client.

ACRADYNE GEN IV ACE CONTROLLER PLATFORM



GEN IV ACE iPC Controller for Uryu UDP Transducerized DC Pulse Tools



Model*	System Port & Removable Memory	Lights (L) LED Display (D) Graph (G)	24V I/O Assignable 8 X 8"	Serial Port with Protocols	Backup & Restore (USB)	Ethernet** Two Ports
Bottom Exit Cable						
110V Operation iPC4EGV(P1)(N1)(D1)(C1)(M1)	X	L/D/G	X	X	X	X
220V Operation iPC4EGV(P2)(N2)(D2)(C2)	X	L/D/G	X	X	X	X
Top Exit Cable						
110V Operation iPC4EGV(1-T)(P1-T)(N1-T)(D1-T)(C1-T)(M1-T)	X	L/D/G	X	X	X	X
220V Operation iPC4EGV(2-T)(P2-T)(N2-T)(D2-T)(C2-T)	X	L/D/G	X	X	X	X

* Field bus options: P = Profibus N = Profinet D = DeviceNet C = CC Link M = CC-Link IE Field

Other Field bus options available upon request.

** Ethernet channel supports Open Protocol, ToolsNet, EtherNet/IP, Modbus TCP, PFCS, XML, and FTP Client.



GEN IV ACE iBC Controller for all AcraDyne Transducerized Battery Tools



Model*	System Port & Removable Memory	Lights (L) LED Display (D) Graph (G)	24V I/O Assignable 8 X 8"	Serial Port with Protocols	Backup & Restore (USB)	Ethernet** Two Ports
Connects through External WiFi Access Point (User Supplied)						
iBC4E(N)	X	L/D		X	X	X
iBC4EGV(P)(N)(D)(C)	X	L/D	X	X	X	X

* Field bus options: P = Profibus N = Profinet D = DeviceNet C = CC Link M = CC-Link IE Field

Other Field bus options available upon request.

** Ethernet channel supports Open Protocol, ToolsNet, EtherNet/IP, Modbus TCP, PFCS, XML, and FTP Client.



GEN IV ACE iBC-Z Controller for Uryu UBX-AF Transducerized Battery Oil Pulse Tools



Model*	System Port & Removable Memory	Lights (L) LED Display (D) Graph (G)	24V I/O Assignable 8 X 8"	Serial Port With Protocols	Backup & Restore (USB)	Ethernet** Two Ports
Connectivity through embedded Zigbee access point						
iBC4EGV(P-Z)(N-Z)(D-Z)(C-Z)(M-Z)	X	L/D/G	X	X	X	X

* Field bus options: P = Profibus N = Profinet D = DeviceNet C = CC Link M = CC-Link IE Field

Other Field bus options available upon request.

** Ethernet channel supports Open Protocol, ToolsNet, EtherNet/IP, Modbus TCP, PFCS, XML, and FTP Client.

ACRADYNE GEN IV ACE CONTROLLER PLATFORM

NETWORK CONNECTIVITY



POKA-YOKE ERROR PROOFING

AcraDyne's Gen IV ACE Platform supports any third-party accessory to poka-yoke your process.

FEATURES AND BENEFITS

- 24V I/O inputs support the outputs of the receiver units
- Connect click wrenches, crimpers, or any poka-yoked device to your network data collection and line controls with all of the Ethernet protocols and Field Buses offered in the ACE Platform




ACRADYNE CONTROLLER SOFTWARE

SOFTWARE

AcraDyne's software package is on-board every AcraDyne controller and is provided FREE of charge. This comprehensive, user-friendly program allows programming, analysis, and diagnostics.


The software is based on a standard web browser, allowing you to connect the AcraDyne controller with any computer, tablet, or smart device. Connect through Ethernet, USB, or wirelessly via a network connected to both devices.

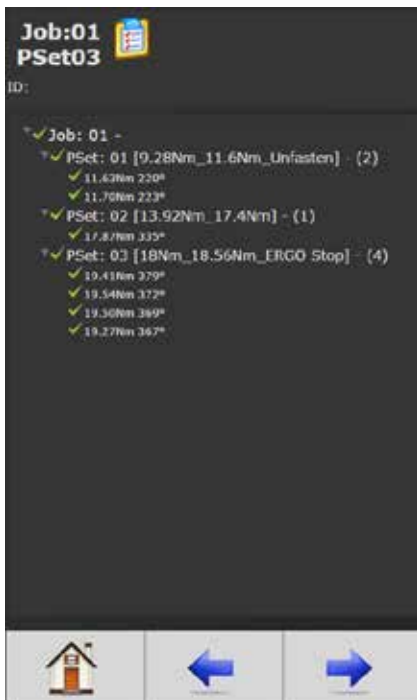

Adding and editing Parameter Sets (256) and Jobs (99) is easy and intuitive in the parameter set up function.



View curve results in real time or view stored results. As many as 20,000 curve results can be stored in memory.

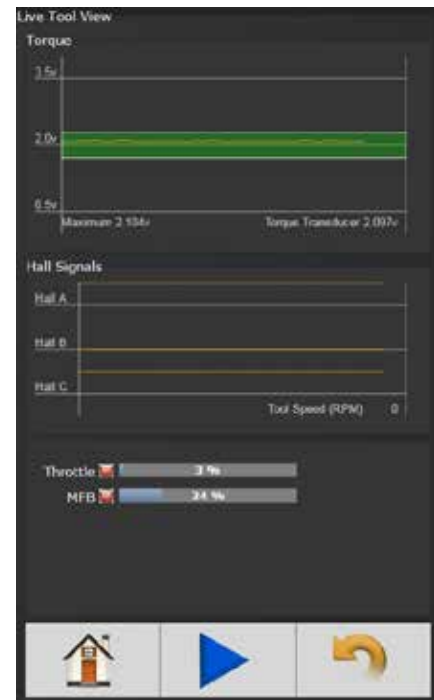

Tool programming and diagnostics for repair, calibration and advanced troubleshooting.



Choose from several run screens that display easy to view, large screen indicators.

GEN IV SMART ARM SYSTEM WITH PROCESS VISUALIZATION

Gen IV Controller with On-Board Smart Arm Capability and Process Visualization


AcraDyne Gen IV Controller's smart arm capability provides an advanced error-proofing solution to ensure the quality of your fastening operation. The process requires no external PC or software – the capability is on-board every Gen IV controller.

FEATURES AND BENEFITS

- Easy-to-follow visual guidance on the Gen IV controller graphical screen
- Easy setup – programming takes only minutes
- Once fastener locations are programmed into the Gen IV controller, the system can perform specific actions on specific fasteners
- No external PC or third-party software needed. Control the process using AcraDyne's Gen IV Controller and its integrated software, which is provided free of charge
- Low-cost solution vs. competitive offerings that require third-party PC-based control
- Modular – can be added at any time to an existing AcraDyne system using the Gen IV controller
- No guesswork! Powerful Gen IV data collection enables diagnostics and analysis
- Works with both continuous and discontinuous drive tools



The Gen IV controller provides easy-to-follow visual guidance directly on the graphical screen.

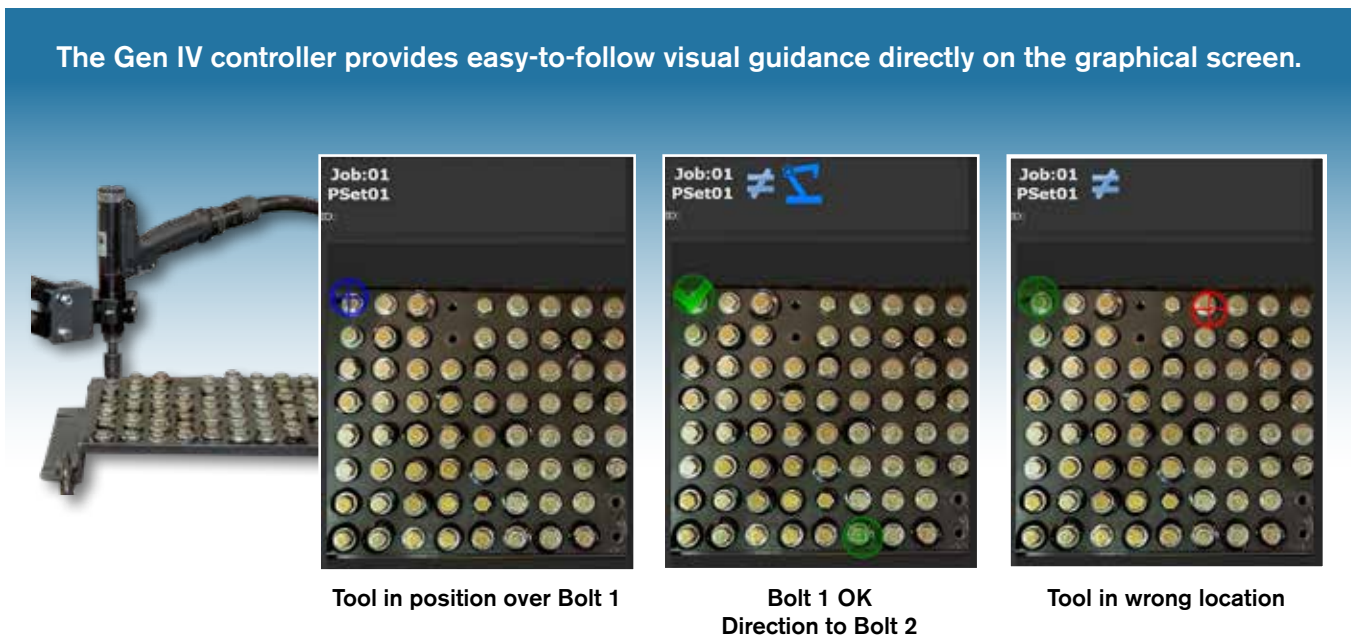

Tool in position over Bolt 1

Bolt 1 OK
Direction to Bolt 2

Tool in wrong location

GEN IV SMART ARM SYSTEM WITH PROCESS VISUALIZATION

Smart Arm Accessory:

- Requires no external PC or third-party software for operation
- Gen IV Controller Software integrates with plant manufacturing execution software or allows custom programming

Encoders located at each joint of the arm.

Smart Arm guides operator in the specified torque pattern and counts fasteners required for correct assembly.

Gen IV Controller captures fastening-process data:

- Data captured and reported in real time with torque and graphing capabilities
- Curve results presented in real time or from stored results
- 20,000 curve results can be stored in memory
- Monitor, control, and report torque, angle, engineering units, fastener count, job/job sequence
- Multiple fastening strategies: 256 parameter sets with 20 stages
- Jobs capabilities – 99



Gen IV Controller with Large 7" Touch Screen

Smart Arm Accessory

Custom image of run screen with preprogrammed fastener locations/specifications. Updates in real time.

Tool operates only when it is at the correct specified fastener location.

1000 SERIES


1 – 22 Nm

- Superior size, speed, and duty cycle compared to competitors' tools
- Durable Nylon motor and handle housing
- Onboard lights and audible signal for operator feedback



1000 Series Pistol Tools

- Bottom, top, rear exit and push-to-start models available
- Standard Square Drive or extended Ergo Drive output available on all models
- 1/4" Quick Change output available on 3–14 Nm models
- Programmable Multi-Function Button: One single button facilitates several distinctly different tasks

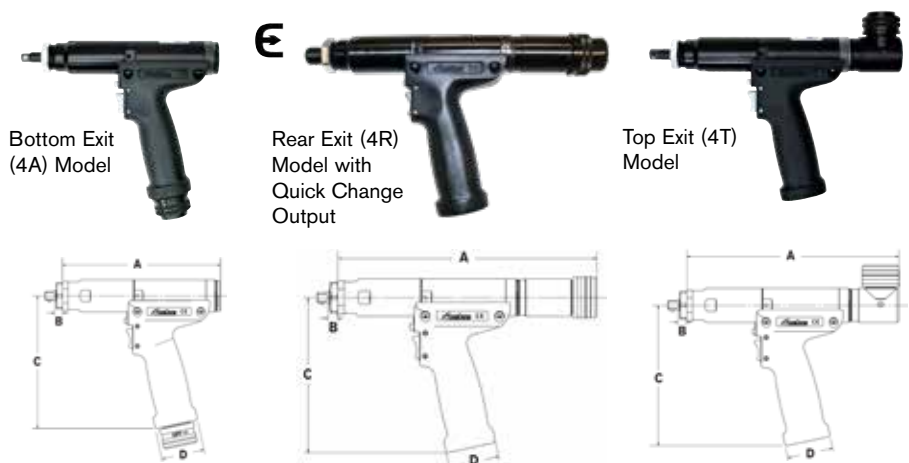


1000 Series Pistol Tools

		MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT DRIVE	A		B		C		D	
MODEL		NM	FT-LB	NM	FT-LB	RPM	LB	KG	SQ.DR	IN	MM	IN	MM	IN	MM	IN	MM
Pistol 4A Models = Bottom Exit 4R Models = Rear Exit 4T Models = Top Exit (V) = Extended Ergo-Drive Output (Q) = 1/4" Quick Change Output																	
AEP4(A)(R)(T)12003B(V)(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.2	1.00	3/8"	A = 6.5 R = 9.3 T = 8.3	165.1 236 210.9	0.38	9.6	6.01	152.6	1.96	49.7	
AEP4(A)(R)(T)12006B(V)(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.2	1.00	3/8"	A = 6.5 R = 9.3 T = 8.3	165.1 236 210.9	0.38	9.6	6.01	152.6	1.96	49.7	
AEP4(A)(R)(T)12011B(V)(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.3	1.04	3/8"	A = 7.17 R = 10.34 T = 8.97	182.2 262.7 228	0.38	9.6	6.01	152.6	1.96	49.7	
AEP4(A)(R)(T)12014B(V)(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.3	1.04	3/8"	A = 7.17 R = 10.34 T = 8.97	182.2 262.7 228	0.38	9.6	6.01	152.6	1.96	49.7	
AEP4(A)(R)(T)12018BV	18	13	4.5 - 18	3.3 - 13	840	2.3	1.04	3/8"	A = 7.17 R = 10.34 T = 8.97	182.2 262.7 228	0.38	9.6	6.01	152.6	1.96	49.7	
AEP4(A)(R)(T)12022BV	22	16	5.5 - 22	4.1 - 16	656	2.3	1.04	3/8"	A = 7.17 R = 10.34 T = 8.97	182.2 262.7 228	0.38	9.6	6.01	152.6	1.96	49.7	
Pistol Push-to-Start																	
AEP4T12003BL	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.2	1.00	3/8"	8.88	225.5	0.25	6.3	6.01	152.6	1.96	49.7	
AEP4T12006BL	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.2	1.00	3/8"	8.88	225.5	0.25	6.3	6.01	152.6	1.96	49.7	
AEP4T12011BL	11	8.1	2.8 - 11	2 - 8.1	1,313	2.3	1.04	3/8"	8.97	228	0.25	6.3	6.01	152.6	1.96	49.7	
AEP4T12014BL	14	10	3.5 - 14	2.6 - 10	1,037	2.3	1.04	3/8"	8.97	228	0.25	6.3	6.01	152.6	1.96	49.7	

* € logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

1000 Series Angle Tools

- Compact, durable head houses a precision right-angle gearset that fits into the tightest spaces
- Integrated transducer for accurate delivery or monitoring of Torque and Angle
- Lightweight materials and uniform body diameter provide a comfortable grip
- Ergonomically placed start lever for ease of operation
- Available in regular or flush socket options

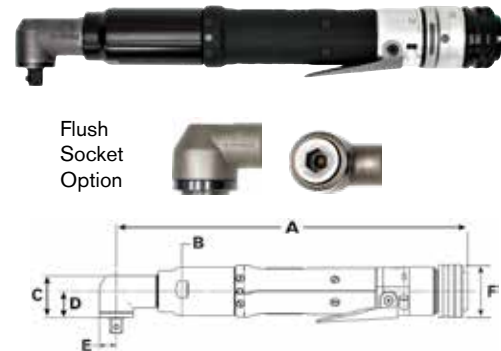

1000 Series Angle Tools

MODEL	MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT DRIVE	A		B		C		D		E		F	
	NM	FT-LB	NM	FT-LB	RPM	LB	KG	SQ DR	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
Angle Add "F" to Part Numbers for Flush Socket																				
AEN4C12004B	4	3	1 - 4	0.7 - 3	3,111	2.0	0.91	3/8"	11.04	280.4	1.47	37.3	1.29	32.8	0.82	20.9	.52	13.1	1.56	39.6
AEN4C12009B	9	6.6	2.3 - 9	1.7 - 6.6	1,750	2.2	1.00	3/8"	11.01	279.6	1.47	37.3	1.29	32.8	0.82	20.9	.52	13.1	1.56	39.6
AEN4C12014B	14	10	3.5 - 14	2.6 - 10	875	2.2	1.00	3/8"	11.65	295.9	1.47	37.3	1.29	32.8	0.82	20.9	.52	13.1	1.56	39.6
AEN4C12018B	18	13	4.5 - 18	3.3 - 13	691	2.2	1.00	3/8"	11.65	295.9	1.47	37.3	1.29	32.8	0.82	20.9	.52	13.1	1.56	39.6
AEN4C12022B	22	16	5.5 - 22	4.1 - 16	560	2.2	1.00	3/8"	11.65	295.9	1.47	37.3	1.29	32.8	0.82	20.9	.52	13.1	1.56	39.6



1000 Series Inline Tools

- Square drive or Ergo drive available on all inline models
- Quick change output available on 3 – 14 Nm inline and push-to-start models
- User modifiable reaction bar included with in-line tools for use in handheld applications



1000 Series Inline Tools

MODEL	MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT DRIVE	A		B		C		D		E	
	NM	FT-LB	NM	FT-LB	RPM	LB	KG	SQ DR	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
Inline V = Extended Ergo-Drive Output Q = 1/4" Quick Change Output																		
AES4A12003B(V)(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.0	0.91	3/8"	11	279.4	1.47	37.3	7.43	188.6	1.56	39.6	1.31	33.4
AES4A12006B(V)(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.0	0.91	3/8"	11	279.4	1.47	37.3	7.43	188.6	1.56	39.6	1.31	33.4
AES4A12011B(V)(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.2	1.00	3/8"	11	279.4	1.47	37.3	7.43	188.6	1.56	39.6	1.31	33.4
AES4A12014B(V)(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.2	1.00	3/8"	11	279.4	1.56	39.6	7.43	188.6	1.56	39.6	1.31	33.4
AES4A12018BV	18	13	4.5 - 18	3.3 - 13	840	2.2	1.00	3/8"	11	279.4	1.47	37.3	7.43	188.6	1.56	39.6	1.31	33.4
AES4A12022BV	22	16	5.5 - 22	4.1 - 16	656	2.2	1.00	3/8"	11	279.4	1.47	37.3	7.43	188.6	1.56	39.6	1.31	33.4
Inline Push-to-Start (Q) = 1/4" Quick Change Output																		
AEL4A12003B(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.0	0.91	3/8"	10.69	271.6	1.56	39.6	7.38	187.4	0.21	5.3	1.56	39.6
AEL4A12006B(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.0	0.91	3/8"	10.69	271.6	1.56	39.6	7.38	187.4	0.21	5.3	1.56	39.6
AEL4A12011B(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.2	1.00	3/8"	11.26	286.1	1.56	39.6	7.38	187.4	0.21	5.3	1.56	39.6
AEL4A12014B(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.2	1.00	3/8"	11.26	286.1	1.56	39.6	7.38	187.4	0.21	5.3	1.56	39.6
AEL4A12018B	18	13	4.5 - 18	3.3 - 13	840	2.2	1.00	3/8"	11.26	286.1	1.56	39.6	7.38	187.4	0.21	5.3	1.56	39.6
AEL4A12022B	22	16	5.5 - 22	4.1 - 16	656	2.2	1.00	3/8"	11.26	286.1	1.56	39.6	7.38	187.4	0.21	5.3	1.56	39.6




* € logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

1000 Series Tubenut Tools

- Durable tubenut head design
- Simple, one-touch back to open operation for maximum productivity
- Innovative Sensor Technology: Transducer senses resistance in the initial 90 degrees of rotation and returns to open upon resistance encountered



INNOVATIVE SAFETY SENSOR TECHNOLOGY: Tool returns to open upon resistance encountered in initial 90° of rotation.



1000 Series Tubenut Tools

1000 SERIES	MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT DRIVE		A		B		C		D		E	
	NM	FT-LB	NM	FT-LB	RPM	LB	KG	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
Tubenut Wide variety of socket sizes available																			
AET4AA12018B	14	13	3.6 - 14	2.7 - 11	516	3.1	1.41	1/4 - 7/16	7 - 12	15.4	391.5	1.47	37.3	1.57	40	1.46	37	1.56	39.6
AET4AB12025B	20	18	5 - 20	3.7 - 15	387	3.1	1.41	3/8 - 5/8	10 - 17	15.9	404.9	1.47	37.3	1.57	40	1.56	39.5	1.56	39.6
AET4A12025B-KD	25	18	5 - 25	3.7 - 18	387	3.1	1.41	3/8 - 5/8	10 - 17	15.9	403.2	1.47	37.3	1.64	41.6	1.64	41.6	1.56	39.6
AET4A12030B-KD	30	22	6 - 30	4.4 - 22	285	3.1	1.41	3/8 - 5/8	10 - 17	15.9	403.2	1.47	37.3	1.64	41.6	1.64	41.6	1.56	39.6



DESIGNED + MADE IN THE USA

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

1000 Series Fixtured Tools

- Rear & bottom exit available
- Standard Square Drive, Extended Ergo Drive or 1/4" Quick Change outputs available in most models
- Integrated Sliding Spindles offered in varying lengths of travel to suit specific application needs



Rear Exit Model



Bottom Exit Model




1-3/4" Sliding Spindle Model

1000 Series Fixtured Tools


MODEL	MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT DRIVE
	NM	FT-LB	NM	FT-LB	RPM	LB	KG	SQ DR
Fixtured	4A models = 1/2" sliding spindle		4C Models = 1-3/4" Sliding Spindle		4X Models = Fixed 3/8" Sq. Dr.			
	(B) = Bottom Exit Cable		(Q) = 1/4" Quick Change Output					
AEF4(A)(C)(X)12003B(B)(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.0	0.91	3/8"
AEF4(A)(C)(X)12006B(B)(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.0	0.91	3/8"
AEF4(A)(C)(X)12011B(B)(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.2	1.00	3/8"
AEF4(A)(C)(X)12014B(B)(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.2	1.00	3/8"
AEF4(A)(C)(X)12018B(B)	18	13	4.5 - 18	3.3 - 13	840	2.2	1.00	3/8"
AEF4(A)(C)(X)12022B(B)	22	16	5.5 - 22	4.1 - 16	656	2.2	1.00	3/8"

1000 Series Fixtured Tool Dimensions


FIXTURED	A		B		C		D		E		F		G	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
AEF4A12003B	11.57	294	9.14	231.1	1.47	37.3	1.12	28.6	2.05	52.2	1.59	40.4	2.18	55.5
AEF4A12006B	11.57	294	9.14	231.1	1.47	37.3	1.12	28.6	2.05	52.2	1.59	40.4	2.18	55.5
AEF4A12011B	12.20	309.8	9.14	231.1	1.47	37.3	1.12	28.6	2.72	69.2	1.59	40.4	2.18	55.5
AEF4A12014B	12.20	309.8	9.14	231.1	1.47	37.3	1.12	28.6	2.72	69.2	1.59	40.4	2.18	55.5
AEF4A12018B	12.20	309.8	9.14	231.1	1.47	37.3	1.12	28.6	2.72	69.2	1.59	40.4	2.18	55.5
AEF4A12022B	12.20	309.8	9.14	231.1	1.47	37.3	1.12	28.6	2.72	69.2	1.59	40.4	2.18	55.5
AEF4C12003B	15.36	390.3	9.14	231.1	1.47	37.3	1.12	28.6	2.05	52.2	1.59	40.4	5.98	151.8
AEF4C12006B	15.36	390.3	9.14	231.1	1.47	37.3	1.12	28.6	2.05	52.2	1.59	40.4	5.98	151.8
AEF4C12011B	15.99	406.1	9.14	231.1	1.47	37.3	1.12	28.6	2.72	69.2	1.59	40.4	5.98	151.8
AEF4C12014B	15.99	406.1	9.14	231.1	1.47	37.3	1.12	28.6	2.72	69.2	1.59	40.4	5.98	151.8
AEF4C12018B	15.99	406.1	9.14	231.1	1.47	37.3	1.12	28.6	2.72	69.2	1.59	40.4	5.98	151.8
AEF4C12022B	15.99	406.1	9.14	231.1	1.47	37.3	1.12	28.6	2.72	69.2	1.59	40.4	5.98	151.8
AEF4X12003B	9.35	237.5	6.82	173.2	1.47	37.3	1.31	33.4	2.06	52.2	1.59	40.4	0.38	9.7
AEF4X12006B	9.35	237.5	6.82	173.2	1.47	37.3	1.31	33.4	2.06	52.2	1.59	40.4	0.38	9.7
AEF4X12011B	10.02	254.4	6.82	173.2	1.47	37.3	1.31	33.4	2.72	69.1	1.59	40.4	0.38	9.7
AEF4X12014B	10.02	254.4	6.82	173.2	1.47	37.3	1.31	33.4	2.72	69.1	1.59	40.4	0.38	9.7
AEF4X12018B	10.02	254.4	6.82	173.2	1.47	37.3	1.31	33.4	2.72	69.1	1.59	40.4	0.38	9.7
AEF4X12022B	10.02	254.4	6.82	173.2	1.47	37.3	1.31	33.4	2.72	69.1	1.59	40.4	0.38	9.7



AEF4A 1/2" Sliding Spindle Model



AEF4C 1-3/4" Sliding Spindle Model



AEF4X Fixed 3/8" Sq. Dr. Model

2000 SERIES


3 – 55 Nm

- Superior size, speed, and duty cycle compared to competitors' tools
- Durable Nylon motor and handle housing
- Aluminum motor and gear housing
- Onboard lights and audible signal for operator feedback



2000 Series Pistol Tools

- Bottom, top, rear exit and push-to-start model available
- Standard Square Drive or extended Ergo Drive output available on all models
- Programmable Multi-Function Button: One single button facilitates several distinctly different tasks

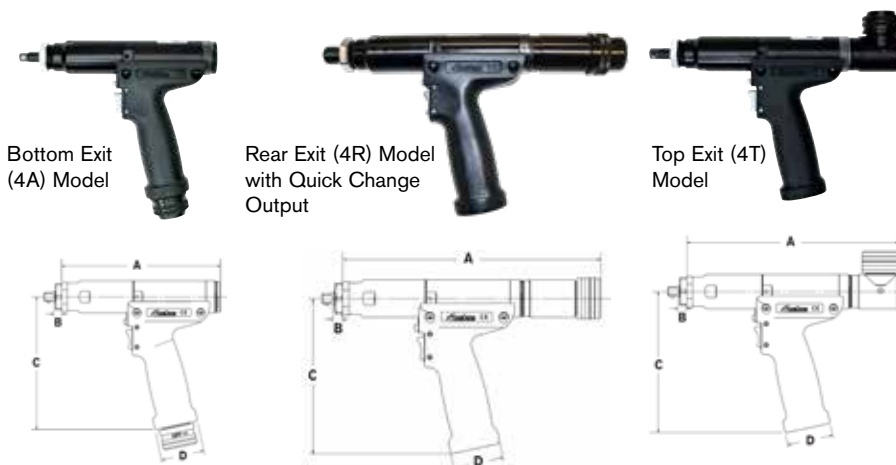

2000 Series Pistol Tools

					FREE SPEED	WEIGHT (-) SOCKET		OUTPUT									
MODEL	MAX TORQUE		TORQUE RANGE		RPM	LB KG		SQ DR	(A)		(B)		(C)		(D)		
	NM	FT-LB	NM	FT-LB					IN	MM	IN	MM	IN	MM	IN	MM	
Pistol Tools	4A Models = Bottom Exit		4R Models = Rear Exit		4T Models = Top Exit												
	(V) = Extended Ergo-Drive Output																
AEP4(A)(R)(T)22020B(V)	20	14	5 - 20	3.7 - 14	1,313	2.4	1.09	3/8"	A = 7.82 R = 10.65 T = 9.71	198.7 270.6 246.5	0.38	9.7	A = 6.94 R = 6.01 T = 6.01	176.2 152.6 152.6	1.96	49.7	
AEP4(A)(R)(T)22025B(V)	25	18	6.3 - 25	4.6 - 18	1,037	2.4	1.09	3/8"	A = 7.82 R = 10.65 T = 9.71	198.7 270.6 246.5	0.38	9.7	A = 6.94 R = 6.01 T = 6.01	176.2 152.6 152.6	1.96	49.7	
AEP4(A)(R)(T)22030B(V)	30	22	7.5 - 30	5.5 - 22	840	2.4	1.09	3/8"	A = 7.82 R = 10.65 T = 9.71	198.7 270.6 246.5	0.38	9.7	A = 6.94 R = 6.01 T = 6.01	176.2 152.6 152.6	1.96	49.7	
AEP4(A)(R)(T)22035B(V)	35	25	8.8- 35	6.5 - 25	747	2.4	1.09	3/8"	A = 7.82 R = 10.65 T = 9.71	198.7 270.6 246.5	0.38	9.7	A = 6.94 R = 6.01 T = 6.01	176.2 152.6 152.6	1.96	49.7	
AEP4(A)(R)(T)22040B(V)	40	29	10 - 40	7.4 - 29	656	2.4	1.09	3/8"	A = 7.82 R = 10.65 T = 9.71	198.7 270.6 246.5	0.38	9.7	A = 6.94 R = 6.01 T = 6.01	176.2 152.6 152.6	1.96	49.7	

* E logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

2000 Series Angle and Inline Tools

NEW

Gen IV Series Angle and Inline Nutrunners

Smart, Rugged, and Cost-Effective: The New Leader in Accurate Fastening

Optimal Length

- Access to most applications
- Easier tool positioning for operators

Ergonomic Handle

- Smooth grip surface
- Indexable head for optimizing trigger position

New Motor Design

- Lightweight
- Slim diameter

Updated Trigger Design

- Lever integrated to tool body for shorter activation stroke
- Increased durability




FEATURES AND BENEFITS

- New robust design is lighter, slimmer, and more ergonomic than previous Gen III nutrunners
- One of the lowest total cost of ownership in the industry
- Ergonomic updated trigger design integrates trigger to tool body, requiring a shorter activation stroke
- Indexable head optimizes trigger position
- Smooth-grip handle
- Short length means easier tool positioning
- Backward compatible with all Gen III and Gen IV AcraDyne controllers


2000 Series Angle & Inline Tools

TORQUE RANGE			FREE SPEED	WEIGHT (-) SOCKET		OUTPUT	(A)		(B)		(C)		(D)		(E)		(F)	
MODEL	NM	FT-LB	RPM	LB	KG	SQ DR	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN
Angle Tools																		
AEN4C22014B	3.5 - 14	2.6 - 10.3	1,750	2.7	1.2	3/8	397	15.6	32	1.3	59.4	2.3	43.3	1.7	160	6.3	20.9	0.8
AEN4C22024B	6 - 24	4.4 - 17.7	875	2.7	1.2	3/8	397	15.6	32	1.3	59.4	2.3	43.3	1.7	160	6.3	20.9	0.8
AEN4F22029B	7.3 - 29	5.4 - 21.4	788	3.2	1.5	3/8	419	16.5	33.4	1.3	79.8	3.1	43.3	1.7	160	6.3	29.4	1.16
AEN4F22036B	9 - 36	6.6 - 26.6	622	3.2	1.5	3/8	419	16.5	33.4	1.3	79.8	3.1	43.3	1.7	160	6.3	29.4	1.16
AEN4F22043B	10.8 - 43	8 - 31.7	504	3.2	1.5	3/8	419	16.5	33.4	1.3	79.8	3.1	43.3	1.7	160	6.3	29.4	1.16
AEN4F22055B	13.8 - 55	10.2 - 40.6	394	3.2	1.5	3/8	419	16.5	33.4	1.3	79.8	3.1	43.3	1.7	160	6.3	29.4	1.16
Inline Tools (Includes Reaction Bar and Fixture Nut)																		
AES4A22020B	5 - 20	3.7 - 14.8	1,313	2.8	1.3	3/8	401	15.8	95.9	3.8	109.5	4.3	43.3	1.7	160	6.3	381	15
AES4A22025B	6.3 - 25	4.6 - 18.4	1,037	2.8	1.3	3/8	401	15.8	95.9	3.8	109.5	4.3	43.3	1.7	160	6.3	381	15
AES4A22030B	7.5 - 30	5.5 - 22.1	840	2.8	1.3	3/8	401	15.8	95.9	3.8	109.5	4.3	43.3	1.7	160	6.3	381	15
AES4A22035B	8.8 - 35	6.5 - 25.8	747	2.8	1.3	3/8	401	15.8	95.9	3.8	109.5	4.3	43.3	1.7	160	6.3	381	15
AES4A22040B	10 - 40	7.4 - 29.5	656	2.8	1.3	3/8	401	15.8	95.9	3.8	109.5	4.3	43.3	1.7	160	6.3	381	15

Angle Tool Dimensions



Inline Tool Dimensions



2000 Series Mid-Exit Tools

FEATURES AND BENEFITS


- Length
 - Reduced tool length due to cable exiting in front of grip surface
- Ergonomics
 - Reduced torque reaction compared to pistol-style tools
 - The inline handle, coupled with the ergonomic hand positioning, allows for increased leverage and decreased strain on the wrist
- Cable management
 - If used with a spring balancer, the tool hangs naturally near its center of gravity, the cable is controlled by the balancer
 - Front positioning of cable provides for easy cable management




Specialized heads and blades available by request.
Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.

2000 Series Mid-Exit Cable Tools

MAX TORQUE TORQUE RANGE FREE SPEED WEIGHT (-) SOCKET OUTPUT									A		B		C		D		E		F	
MODEL	NM	FT-LB	NM	FT-LB	RPM	LB	KG	SQ. DR.	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
Mid-Exit Models: Angle Body Style Add "F" to Part Numbers for Flush Socket																				
AEN4C22015BM(F)	15	11	3.75 - 15	2.77 - 11	700	2.6	1.18	3/8"	9.02	229.1	1.47	37.3	1.29	32.8	.82	20.9	.52	13.1	3.51	89.3
AEN4F22030BM(F)	30	22	7.5 - 30	5.53 - 22	675	3.3	1.50	3/8"	11.24	285.6	1.47	37.3	1.66	42.1	1.17	29.7	.70	17.8	5.73	145.6
AEN4F22037BM(F)	37	29	9.25 - 37	6.82 - 29	533	3.3	1.50	3/8"	11.24	285.6	1.47	37.3	1.66	42.1	1.17	29.7	.70	17.8	5.73	145.6
AEN4F22044BM(F)	44	32	11 - 40	8.11 - 29	432	3.3	1.50	3/8"	11.24	285.6	1.47	37.3	1.66	42.1	1.17	29.7	.70	17.8	5.73	145.6
Mid-Exit Models: Inline, Straight, and Offset Body Style																				
AES4A22020BVM	20	15	5 - 20	3.7 - 15	1050	2.4	1.09	3/8"	9.0	228.5	1.47	37.3	3.49	88.6	.56	14.2	—	—	—	—
AES4A22025BVM	25	18	6.3 - 25	4.6 - 18	830	2.4	1.09	3/8"	9.0	228.5	1.47	37.3	3.49	88.6	.56	14.2	—	—	—	—
AES4A22030BVM	30	22	7.5 - 30	5.5 - 22	672	2.4	1.09	3/8"	9.0	228.5	1.47	37.3	3.49	88.6	.56	14.2	—	—	—	—
AES4A22040BVM	40	30	10 - 40	7.4 - 30	525	2.4	1.09	3/8"	9.0	228.5	1.47	37.3	3.49	88.6	.56	14.2	—	—	—	—



Angle Body Style



Inline, Straight, and Offset Body Style

3000 SERIES


10 – 600 Nm

- Superior size, speed, and duty cycle compared to competitors' tools
- Aluminum gear and motor housing
- Onboard lights and audible signal for operator feedback



3000 Series Angle Tools

- Provides the perfect solution for space-limited applications
- Compact, durable head houses a precision right-angle gearset that fits into the tightest spaces
- Integrated transducer for accurate delivery or monitoring of Torque and Angle
- Lightweight materials and uniform body diameter provide a comfortable grip
- Ergonomically placed start lever for ease of operation
- Available in regular or flush socket options
- Dual-Lever available on 60 – 375 Nm models


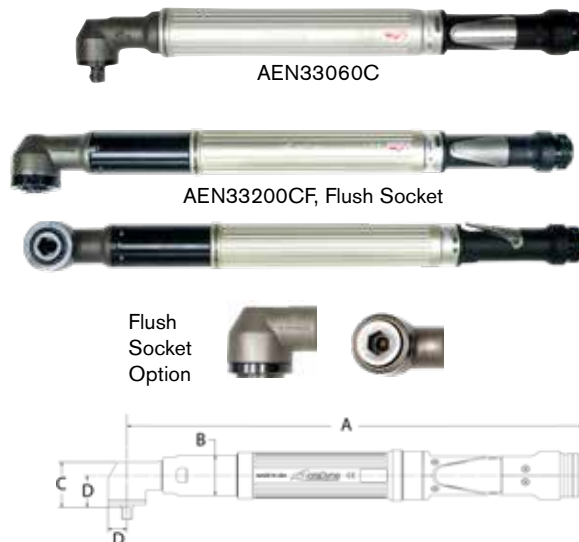


3000 Series Angle Tools

		MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT	(A)		(B)		(C)		(D)		(E)	
MODEL		NM	FT-LB	NM	FT-LB	RPM	LB	KG	SQ. DR	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
3000 Series Add "F" to Part Numbers for Flush Socket Add "DL" to Part Numbers for Dual Lever																			
AEN33042C(F)		42	31	9.5 - 42	7 - 31	1,095	4.4	2.00	3/8	16.78	426.3	1.47	37.3	1.66	42.11	1.17	29.67	.70	17.78
AEN33053C(F)		53	39	12 - 53	8 - 39	865	4.4	2.00	3/8	16.81	426.9	1.47	37.3	1.66	42.11	1.17	29.67	.70	17.78
AEN33060C(F)(DL)		60	44	12 - 60	9 - 44	845	6.6	2.99	1/2.	19.14	486.14	1.85	47	1.91	48.36	1.38	35.2	.83	21
AEN33090C(F)(DL)		90	66	18 - 90	13 - 66	568	6.6	2.99	1/2.	19.14	486.14	1.85	47	1.91	48.36	1.38	35.2	.83	21
AEN33120C(F)(DL)		120	89	24 - 120	18 - 88	442	9.3	4.22	1/2	21.22	539	1.85	47	2.78	71	2.08	53	1.05	27
AEN33200C(F)(DL)		200	148	40 - 200	29 - 147	245	9.4	4.26	3/4	23.43	595	1.85	47	2.54	65	1.84	47	1.05	27
AEN33210C(F)(DL)		210	95	50 - 210	37 - 155	234	10.0	4.54	3/4	23.8	604.5	1.85	47	2.97	75	2.04	52	1.25	32
AEN33300C(F)(DL)		300	221	60 - 300	42 - 221	151	10.0	4.54	3/4	23.72	602	1.85	47	2.97	75	2.04	52	1.25	32
AEN33375C(F)(DL)		375	277	75 - 375	55 - 276	151	10.0	4.54	3/4	23.72	602	1.85	47	2.97	75	2.04	52	1.25	32

3000 Series Inline Tools

- Compact and durable, AcraDyne 3000 Series inline nutrunners are the ideal choice for fixtured fastening applications
- A uniform body diameter and a hex-shaped mounting point allow for simple installation into fixtured plates
- User modifiable reaction bar included with in-line tools for use in handheld applications
- Standard Square Drive or extended Ergo Drive output available on all models



3000 Series Inline Tools

3000 Series	MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT										
	NM	FT-LB	NM	FT-LB	RPM	LB	KG	SQ. DR	(A)		(B)		(C)		(D)		(E)	
									IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
(V) = Extended Ergo-Drive Output -2 = 2" sliding spindle																		
AES33040C(V)(-2)	40	30	8 - 40	5.9 - 30	1,314	6.4	2.90	1/2"	V = 18.46 -2 = 23.89	469 606.8	1.96	49.8	V = 1.75 -2 = 1.85	44.5 47	V = 1.8 -2 = 4.3	45.7 109.5	1.78	45.2
AES33060C(V)(-2)	60	44	12 - 60	8.9 - 44	883	6.4	2.90	1/2"	V = 18.46 -2 = 23.89	469 606.8	1.96	49.8	V = 1.75 -2 = 1.85	44.5 47	V = 1.8 -2 = 4.3	45.7 109.5	1.78	45.2
AES33100C(V)(-2)	100	74	20 - 100	15 - 74	489	8.1	3.67	1/2"	V = 22.78 -2 = 27.71	578.6 703.8	1.96	49.8	V = 1.75 -2 = 1.85	44.5 47	V = 6.11 -2 = 3.96	155.3 100.5	1.78	45.2
AES33150C(V)(-2)	150	111	30 - 150	22 - 111	329	8.1	3.67	1/2."	V = 22.78 -2 = 27.71	578.6 703.8	1.96	49.8	V = 1.75 -2 = 1.85	44.5 47	V = 6.11 -2 = 3.96	155.3 100.5	1.78	45.2
AES33230C(V)(-2)	185	137	46 - 185	34 - 137	221	8.1	3.67	1/2"	V = 22.78 -2 = 27.71	578.6 703.8	1.96	49.8	V = 1.75 -2 = 1.85	44.5 47	V = 6.11 -2 = 3.96	155.3 100.5	1.78	45.2
AES33400C	400	295	80 - 400	59 - 295	122	13.0*	5.90*	3/4"	25.2	640	2.64	67.1	1.85	47	1.19	30.12	1.78	45.2
AES33600C	600	443	120 - 600	89 - 443	82	13.0*	5.90*	3/4"	25.2	640	2.64	67.1	1.85	47	1.19	30.12	1.78	45.2

* Includes reaction bar and fixture nut


3000 Series Hold and Drive Tools

- 1" & 2" travel models available
- Sockets and holders are custom



1" Travel
(C-1) Model

2" Travel
(C-2) Model

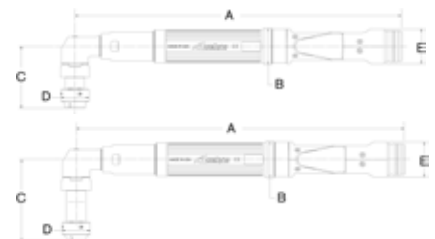

3000 Series Hold and Drive Tools

MODEL*	MAX TORQUE		TORQUE RANGE		FREE SPEED RPM	WEIGHT (LB)	MIN SOCKET MAX SOCKET	(A)		(B)		(C)		(D)		(E)	
	NM	FT-LB	NM	FT-LB				IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
Hold & Drive	(-1) = 1" Travel		(-2) = 2" Travel														
AEH33042C(-1)(-2)	42	31	10 - 42	7 - 31	1,095	-1 = 5.6 -2 = 5.8	9/16 (14 mm) 13/16 (21 mm)	16.79	426.5	1.85	47	-1 = 3.17 -2 = 4.17	80.6 106	1.44	36.5	1.59	40.4
AEH33053C(-1)(-2)	53	39	12 - 53	8 - 39	865	-1 = 5.6 -2 = 5.8	9/16 (14 mm) 13/16 (21 mm)	16.79	426.5	1.85	47	-1 = 3.17 -2 = 4.17	80.6 106	1.44	36.5	1.59	40.4
AEH33060C(-1)(-2)	60	44	12 - 60	9 - 44	845	-1 = 7.3 -2 = 7.5	9/16 (14 mm) 1-1/4 (32 mm)	19.1	485.1	1.85	47	-1 = 3.36 -2 = 4.37	85.3 111.1	1.88	47.6	1.78	45.2
AEH33090C(-1)(-2)	90	66	18 - 90	13 - 66	568	-1 = 7.3 -2 = 7.6	9/16 (14 mm) 1-1/4 (32 mm)	16.79	426.5	1.85	47	-1 = 3.36 -2 = 4.37	85.3 111.1	1.88	47.6	1.78	45.2
AEH33120C(-1)(-2)	120	89	24 - 120	18 - 89	442	-1 = 10.0 -2 = 10.3	5/8 (15 mm) 1-1/4 (32 mm)	21.22	539.1	1.85	47	-1 = 4.09 -2 = 5.09	103.8 129.2	2.25	57.2	1.78	45.2

* E logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

5000 SERIES


20 – 635 Nm

- Superior size, speed, and duty cycle compared to competitors' tools
- High duty cycle
- Durable Nylon motor and handle housing
- Onboard lights and audible signal for operator feedback



5000 Series Pistol Tools

- Bottom and top exit models, as well as push-to start models available
- Ergo drive available on 75 - 170 Nm models
- Programmable Multi-Function Button: One single button facilitates several distinctly different tasks

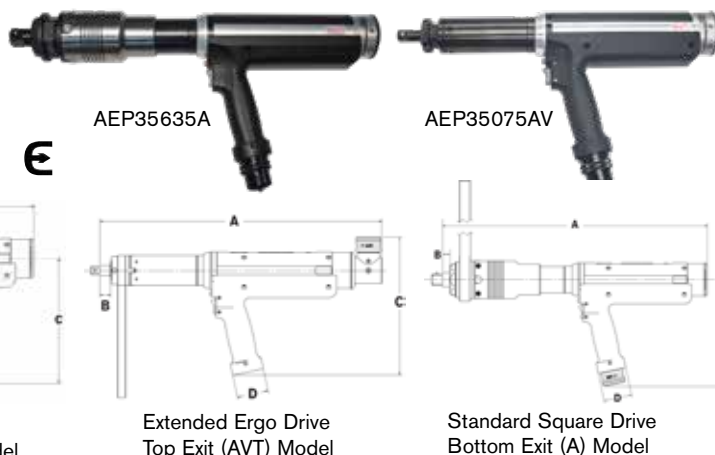

5000 Series Pistol Tools

	MAX TORQUE		TORQUE RANGE		FREE SPEED RPM	WEIGHT (-) SOCKET		OUTPUT SQ DR	(A)		(B)		(C)		(D)	
	NM	FT-LB	NM	FT-LB		LB	KG		IN	MM	IN	MM	IN	MM	IN	MM
5000 Series	V = Extended Ergo-Drive Output T = Top Exit Models															
AEP35075AV(T)	75	55	19 - 75	14 - 55	944	9.2	4.17	1/2	AV = 15.95 AVT = 16.83	405.2 427.4	.68	17.4	AV = 7.44 AVT = 8.63	188.9 219	1.96	49.7
AEP35090AV(T)	90	66	23 - 90	17 - 66	767	9.2	4.17	1/2	AV = 15.95 AVT = 16.83	405.2 427.4	.68	17.4	AV = 7.44 AVT = 8.63	188.9 219	1.96	49.7
AEP35110AV(T)	110	81	28 - 110	21 - 81	634	9.2	4.17	1/2	AV = 15.95 AVT = 16.83	405.2 427.4	.68	17.4	AV = 7.44 AVT = 8.63	188.9 219	1.96	49.7
AEP35135AV(T)	135	99	34 - 135	25 - 99	515	9.2	4.17	1/2	AV = 15.95 AVT = 16.83	405.2 427.4	.68	17.4	AV = 7.44 AVT = 8.63	188.9 219	1.96	49.7
AEP35170AV(T)	170	125	43 - 170	32 - 125	418	9.2	4.17	1/2	AV = 15.95 AVT = 16.83	405.2 427.4	.68	17.4	AV = 7.44 AVT = 8.63	188.9 219	1.96	49.7
AEP35280A(T)	280	206	70 - 280	52 - 207	236	13.6	6.17	3/4	A = 18.51 AT = 19.41	470.3 493.1	.52	13.1	A = 7.44 AT = 8.59	188.9 217.9	1.96	49.7
AEP35350A(T)	350	258	88 - 350	65 - 258	192	13.6	6.17	3/4	A = 18.51 AT = 19.41	470.3 493.1	.52	13.1	A = 7.44 AT = 8.59	188.9 217.9	1.96	49.7
AEP35420A(T)	420	310	105 - 420	78 - 310	159	13.6	6.17	3/4	A = 18.51 AT = 19.41	470.3 493.1	.52	13.1	A = 7.44 AT = 8.59	188.9 217.9	1.96	49.7
AEP35515A(T)	515	380	128 - 515	95 - 380	129	13.6	6.17	3/4	A = 18.51 AT = 19.41	470.3 493.1	.52	13.1	A = 7.44 AT = 8.59	188.9 217.9	1.96	49.7
AEP35635A(T)(R)	635	468	159 - 635	117 - 469	104	13.6	6.17	3/4	A = 18.51 AT = 19.41	470.3 493.1	.52	13.1	A = 7.44 AT = 8.59	188.9 217.9	1.96	49.7


* € logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

5000 Series Angle Tools

- Provides the perfect solution for space-limited applications. Compact, durable head houses a precision right-angle gearset that fits into the tightest spaces
- Integrated transducer for accurate delivery or monitoring of Torque and Angle
- Lightweight materials and uniform body diameter provide a comfortable grip
- Ergonomically placed start lever for ease of operation
- Available in regular or flush socket options




AEN35140B



AEN35285B

Flush Socket
Option



5000 Series Angle Tools

					FREE	WEIGHT (-)												
MAX TORQUE		TORQUE RANGE			SPEED	SOCKET		OUTPUT	(A)		(B)		(C)		(D)		(E)	
NM	FT-LB	NM	FT-LB		RPM	LB	KG	SQ. DR	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
5000 Series Add "F" to Part Numbers for Flush Socket																		
AEN35090B(F)	90	66	23 - 90	17 - 66	607	6.9	3.13	1/2	22.63	574.8	2.31	58.7	1.91	48.6	1.38	35.2	.81	20.6
AEN35140B(F)	140	103	35 - 140	26 - 103	472	10.4	4.72	3/4	22.56	573	2.31	58.7	2.54	64.6	1.84	46.8	1.05	26.7
AEN35175B(F)	175	129	44 - 175	33 - 129	384	10.5	4.76	3/4	22.56	573	2.31	58.7	2.54	64.6	1.84	46.8	1.05	26.7
AEN35225B(F)	225	166	56 - 225	41 - 166	291	12.3	5.58	3/4	22.92	582.2	2.31	58.7	2.86	72.6	1.94	49.1	1.25	31.8
AEN35285B(F)	285	210	71 - 285	52 - 210	236	12.3	5.58	3/4	22.92	582.2	2.31	58.7	2.86	72.6	1.94	49.1	1.25	31.8
AEN35350B(F)	350	258	88 - 350	65 - 258	191	12.3	5.58	3/4	22.92	582.2	2.31	58.7	2.86	72.6	1.94	49.1	1.25	31.8

5000 Series Inline Tools

- Compact and durable, AcraDyne 5000 Series inline nutrunners are the ideal choice for fixtured fastening applications
- A uniform body diameter and a hex-shaped mounting point allow for simple installation into fixtured plates
- User modifiable reaction bar included with in-line tools for use in handheld applications
- Standard Square Drive or extended Ergo Drive output available on all models



AES35170AV



AES35280A



5000 Series
75 - 170 Nm Models (1/2" Sq. Dr.)



5000 Series
280 - 635 Nm Models (3/4" Sq. Dr.)

5000 Series Inline Tools

MAX TORQUE					TORQUE RANGE	FREE SPEED	WEIGHT (-) SOCKET		OUTPUT SQ. DR.	(A)		(B)		(C)		(D)		(E)	
NM		FT-LB		NM	FT-LB	RPM	LB	KG	IN	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
5000 Series V = Extended Ergo-Drive Output																			
AES35075AV	75	55	19 - 75	14 - 55	944	9.2	4.17	1/2		21.9	556.3	1.85	47	2.31	58.7	.68	17.4	1.78	45.2
AES35090AV	90	66	23 - 90	17 - 66	767	9.2	4.17	1/2		21.9	556.3	1.85	47	2.31	58.7	.68	17.4	1.78	45.2
AES35110AV	110	81	28 - 110	21 - 81	634	9.2	4.17	1/2		21.9	556.3	1.85	47	2.31	58.7	.68	17.4	1.78	45.2
AES35135AV	135	100	34 - 135	25 - 100	515	9.2	4.17	1/2		21.9	556.3	1.85	47	2.31	58.7	.68	17.4	1.78	45.2
AES35170AV	170	126	43 - 170	32 - 126	418	9.2	4.17	1/2		21.9	556.3	1.85	47	2.31	58.7	.68	17.4	1.78	45.2
AES35280A	280	207	70 - 280	52 - 207	236	12.8	5.81	3/4		24.33	618.2	2.31	58.7	2.64	67.1	.52	13.1	1.78	45.2
AES35350A	350	258	88 - 350	65 - 258	192	12.8	5.81	3/4		24.33	618.2	2.31	58.7	2.64	67.1	.52	13.1	1.78	45.2
AES35420A	420	310	105 - 420	78 - 310	159	12.8	5.81	3/4		24.33	618.2	2.31	58.7	2.64	67.1	.52	13.1	1.78	45.2
AES35515A	515	380	128 - 515	95 - 380	129	12.8	5.81	3/4		24.33	618.2	2.31	58.7	2.64	67.1	.52	13.1	1.78	45.2
AES35635A	635	469	159 - 635	117 - 469	104	12.8	5.81	3/4		24.33	618.2	2.31	58.7	2.64	67.1	.52	13.1	1.78	45.2

* E logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

5000 Series Fixtured Tools

- Rear & bottom exit available
- Standard Square Drive, Extended Ergo Drive or 1/4" Quick Change outputs available in most models
- Models available with 1/2" fixed sq. dr., 3/4" fixed sq. dr., and 2" sliding spindle



AEF35135AV
Extended Ergo Drive, Rear Exit Model



AEF35350A
Standard Spindle, Rear Exit Model



AEF35135AVB
Extended Ergo Drive, Bottom Exit Model



AEF35135A-2
2" Sliding Spindle, Rear Exit Model



AEF35135AB-2
2" Sliding Spindle, Bottom Exit Model


5000 Series Fixtured Tools

MODEL	MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT
	NM	FT-LB	NM	FT-LB	RPM	LB	KG	SQ. DR.
5000 Series	(V) = Extended Ergo Drive Output		(VB) = Extended Output with Bottom Exit Cable		(B) = Bottom Exit Cable			
	(-2) = 2" Sliding Spindle with Rear Exit Cable		(B-2) = 2" Sliding Spindle with Bottom Exit Cable					
AEF35075A(V)(VB)(-2)(B-2)	75	55	19 - 75	14 - 55	944	9.6	4.35	1/2"
AEF35090A(V)(VB)(-2)(B-2)	90	66	23 - 90	17 - 66	767	9.6	4.35	1/2"
AEF35110A(V)(VB)(-2)(B-2)	110	81	28 - 110	21 - 81	634	9.6	4.35	1/2"
AEF35135A(V)(VB)(-2)(B-2)	135	100	34 - 135	25 - 100	515	9.6	4.35	1/2"
AEF35170A(V)(VB)	170	125	43 - 170	32 - 125	418	9.6	4.35	1/2"
AEF35170A(-2)(B-2)	170	125	43 - 170	32 - 125	418	9.6	4.35	3/4"
AEF35280A*	280	207	70 - 280	52 - 207	236	13.6	6.17	3/4"
AEF35350A*	350	258	88 - 350	65 - 258	192	13.6	6.17	3/4"
AEF35420A*	420	310	105 - 420	77 - 310	159	13.6	6.17	3/4"
AEF35515A*	515	380	128 - 515	95 - 380	129	13.6	6.17	3/4"
AEF35635A*	635	469	159 - 635	117 - 469	104	13.6	6.17	3/4"


* Item 28843 is a panel mount 2" sliding spindle for 280 - 635 Nm models.

5000 Series Fixtured Tool Dimensions

MODEL	(A)		(B)		(C)		(D)		(E)		(F)		(G)	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
AEF35075AV	18.04	458.2	11.55	293.3	1.85	47	1.75	44.4	6.92	175.9	1.56	39.6	.72	18.4
AEF35090AV	18.04	458.2	11.55	293.3	1.85	47	1.75	44.4	6.92	175.9	1.56	39.6	.72	18.4
AEF35110AV	18.04	458.2	11.55	293.3	1.85	47	1.75	44.4	6.92	175.9	1.56	39.6	.72	18.4
AEF35135AV	18.04	458.2	11.55	293.3	1.85	47	1.75	44.4	6.92	175.9	1.56	39.6	.72	18.4
AEF35170AV	18.04	458.2	11.55	293.3	1.85	47	1.75	44.4	6.92	175.9	1.56	39.6	.72	18.4
AEF35075A-2	23.48	596.3	11.55	293.3	1.85	47	1.75	44.4	6.92	175.9	1.59	40.4	2.23	56.6
AEF35090A-2	23.48	596.3	11.55	293.3	1.85	47	1.75	44.4	6.92	175.9	1.59	40.4	2.23	56.6
AEF35110A-2	23.48	596.3	11.55	293.3	1.85	47	1.75	44.4	6.92	175.9	1.59	40.4	2.23	56.6
AEF35135A-2	23.48	596.3	11.55	293.3	1.85	47	1.75	44.4	6.92	175.9	1.59	40.4	2.23	56.6
AEF35170A-2	23.48	596.3	11.55	293.3	1.85	47	1.75	44.4	6.92	175.9	1.59	40.4	2.23	56.6
AEF35280A	20.48	520.2	11.55	293.3	2.14	54.4	2.64	67.1	9.28	235.7	1.56	39.6	.52	13.1
AEF35350A	20.48	520.2	11.55	293.3	2.14	54.4	2.64	67.1	9.28	235.7	1.56	39.6	.52	13.1
AEF35420A	20.48	520.2	11.55	293.3	2.14	54.4	2.64	67.1	9.28	235.7	1.56	39.6	.52	13.1
AEF35515A	20.48	520.2	11.55	293.3	2.14	54.4	2.64	67.1	9.28	235.7	1.56	39.6	.52	13.1
AEF35635A	20.48	520.2	11.55	293.3	2.14	54.4	2.64	67.1	9.28	235.7	1.56	39.6	.52	13.1



Extended Ergo Drive Output (AV) Models



2" Sliding Spindle (A-2) Models




Standard Spindle (A) Models


* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

5000 Series Hold-and-Drive Tools

- Torques ranging from 90 Nm – 350 Nm
- Very robust design
- 1" and 2" travels are standard
- Sockets and holders are custom



1" Travel (B-1) Model



2" Travel (B-2) Model

5000 Series Hold and Drive Tools

MODEL*	MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT	MIN SOCKET	(A)		(B)		(C)		(D)		(E)	
	NM	FT-LB	NM	FT-LB	RPM	(LB)	MAX SOCKET	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
	Hold & Drive (-1) = 1" Travel (-2) = 2" Travel																
AEH35090B(-1)(-2)	90	66	23 - 90	17 - 66	607	-1 = 7.6 -2 = 7.9	9/16 (14 mm) 1-1/4 (32 mm)	22.63	574.8	2.31	58.7	-1 = 4.02 -2 = 4.96	102.1 126	1.88	47.6	1.78	45.2
AEH35140B(-1)(-2)	140	103	35 - 140	26 - 103	472	-1 = 10.6 -2 = 11.0	5/8 (15 mm) 1-1/4 (32 mm)	22.56	572.9	2.31	58.7	-1 = 4.87 -2 = 5.87	123.7 149.1	2.25	57.15	1.78	45.2
AEH35175B(-1)(-2)	175	129	44 - 175	33 - 129	384	-1 = 10.6 -2 = 11.1	5/8 (15 mm) 1-1/4 (32 mm)	22.52	571.9	2.31	58.7	-1 = 4.87 -2 = 5.87	123.7 149.1	2.25	57.15	1.78	45.2
AEH35225B(-1)(-2)	225	166	56 - 225	41 - 166	291	-1 = 12.9 -2 = 13.3	3/4 (19 mm) 1-1/4 (32 mm)	22.92	582.2	2.31	58.7	-1 = 5.52 -2 = 6.52	140.1 165.5	2.63	66.7	1.78	45.2
AEH35285B(-1)(-2)	285	210	71 - 285	52 - 210	236	-1 = 12.9 -2 = 13.3	3/4 (19 mm) 1-1/4 (32 mm)	22.92	582.2	2.31	58.7	-1 = 5.52 -2 = 6.52	140.1 165.5	2.63	66.7	1.78	45.2
AEH35350B(-1)(-2)	350	258	88 - 350	65 - 258	191	-1 = 12.9 -2 = 13.3	3/4 (19 mm) 1-1/4 (32 mm)	22.92	582.2	2.31	58.7	-1 = 5.52 -2 = 6.52	140.1 165.5	2.63	66.7	1.78	45.2

SPECIALTY GEARHEADS

AIMCO can provide specialized heads for most any application. Tubenut, Hold and Drive, Crow Foot, Offsets, and Sliding Spindles are just a few of the head styles available. Whatever the requirements, AIMCO will recommend the head configuration that will get the job done successfully.

Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.



ACRADYNE RIVET NUTRUNNERS

FEATURES AND BENEFITS

- Pull-to-torque tool/controller system ensures accurate, repeatable, and measurable tightening every time
- 1000 & 2000 series tools available with bottom exit, rear exit, or top exit cable configurations. Straight, Fixtured, and Push-to-Start models are available by request. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368
- Simple, quick mandrel change design
- Low-friction coating on mandrel for extended life
- Precise control of rivet compression with Torque and Angle detection capability
- Suitable for a wide range of material thicknesses — limited only by rivet nut size
- Data collection and networking capabilities to capture and utilize result data for QMS systems and line controls
- Multi-function button (MFB) provides increased flexibility
- On-board lights and audible signal for operator feedback
- Works with rivet sizes M4 – M10 or 8-32 – 3/8-16



Specifications

					FREE SPEED	WEIGHT (-) SOCKET		OUTPUT	(A)		(B)		(C)		(D)*	
MODEL*	MAX TORQUE		TORQUE RANGE		RPM	LB	KG	SQ DR	IN	MM	IN	MM	IN	MM	IN	MM
	NM	FT-LB	NM	FT-LB												
1000 Series	4A Models = Bottom Exit		4R Models = Rear Exit		4T Models = Top Exit											
AEP4(A)(R)(T)12006BR	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.2	1.00	3/8	9.68	245.9	1.05	26.7	6.01	152.6	1.96	49.8
AEP4(A)(R)(T)12011BR	11	8.1	2.8 - 11	2 - 8.1	1,313	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)12014BR	14	10	3.5 - 14	2.6 - 10	1,037	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)12018BR	18	13	4.5 - 18	3.3 - 13	840	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)12022BR	22	16	5.5 - 22	4.1 - 16	656	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
2000 Series	4A Models = Bottom Exit		4R Models = Rear Exit		4T Models = Top Exit											
AEP4(A)(R)(T)22020BR	20	15	5 - 20	3.7 - 15	1,313	2.4	1.09	3/8	10.18	258.6	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)22030BR	30	22	7.5 - 30	5.5 - 22	840	2.4	1.09	3/8	10.18	258.6	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)22040BR	40	30	10 - 40	7.4 - 30	656	2.4	1.09	3/8	10.18	258.6	1.05	26.7	6.87	174.5	1.96	49.8

Rivet Tools also Available in the Following Models

Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.



ACRADYNE HIGH TORQUE DC TOOLS

Critical bolting demands tools that deliver high torque with superior performance. Couple with AcraDyne's Controller, the HT Series tools combine these features in an electric, high-torque bolting system that beats the competition in accuracy, speed, and safety.

FEATURES AND BENEFITS

- Built-in integral transducer for optimal monitoring and control
- One of the most accurate high-torque tools in the world
- 250 Nm – 17,000 Nm torque range
- Ergonomic, robust design with five handle configurations that are also available in dual-lever models
- The world's most advanced traceable system at the output
- Three tightening strategies:
 - *Torque Control*: Drive the tool to a pre-set Target Torque
 - *Angle Control*: Drive the tool to or measure a pre-set Degree of Angle
 - *Yield Control*: Drive the tool to the Fastener Yield Point to achieve maximum clamp load
- Data retrieval
- Optional rugged carrying/storage case available
- Designed and **MADE IN THE USA**



Pistol Type
(AEP)



Rear Mounted Pistol
(AED)



Axial Type
(AEJ)



Fixtured Type (AEF)



Straight Lever Type (AES)

HT Fixed Gearcase Tool Specifications

MODEL	SERIES	APPROX. TORQUE		APPROX. SPEED	WEIGHT		LENGTH		DIA.		DRIVE	SOUND LEVEL
		NM	FT-LB	RPM	KG	LB	MM	IN	MM	IN	IN	dB(A)
HT Series Fixed Gearcase Models												
AE(P)(D)(S)(J)(F)4A66250B	6000	250	185	315	4.6	10.5	254	10	66	2.6	0.75	66
AE(P)(D)(S)(J)(F)4A66425B	6000	425	315	165	4.6	10.5	254	10	66	2.6	0.75	66
AE(P)(D)(S)(J)(F)4A66625B	6000	625	460	106	4.8	10.5	254	10	66	2.6	0.75	66
AE(P)(D)(S)(J)(F)4A66925B	6000	925	682	72	4.8	10.5	254	10	66	2.6	0.75	66
AE(P)(D)(S)(J)(F)4A771200B	7000	1,200	885	65	6.6	14.5	259	10.2	76	3.0	1	66
AE(P)(D)(S)(J)(F)4A773000B	7000	3,000	2,213	25	7.5	16.5	294	11.6	76	3.0	1	66
AE(P)(D)(S)(J)(F)4A884200B1	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1	66
AE(P)(D)(S)(J)(F)4A884200B	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1.5	66
AE(P)(D)(S)(J)(F)4A898100B*	8000	8,100	6,000	5	15.7	34.5	378	14.9	101	4.0	1.5	66
AE(F)4A998100B*	9000	8,100	6,000	2.3	21.1	46.5	496	19.5	104	4.1	1.5	66

Add "B" to the end of the model number for bottom exit cable (AEF fixtured models only).

* 8,100 Nm – 17,000 Nm models are not supported by the Gen III controller platform. The Gen IV controller platform is required.

**AIMCO can provide customized tooling solutions for even the most unique applications. Let us propose a solution tailored to your needs.
Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.**

ACRADYNE HIGH TORQUE DC TOOLS

360° Swivel Gearcase Nutrunners

FEATURES AND BENEFITS

- Same features and benefits of fixed gearcase models
- Ergonomic, robust design with two handle configurations



2,800 Nm Torque
AEP4W872800B



8,100 Nm Torque
AEJ4B898100B



8,100 Nm Torque
AEP4B898100B

HT 360° Swivel Gearcase Tool Specifications

MODEL	SERIES	APPROX. TORQUE NM	APPROX. TORQUE FT-LB	APPROX. SPEED RPM	WEIGHT** KG	WEIGHT** LB	LENGTH MM	LENGTH IN	DIA. MM	DIA. IN	DRIVE IN	SOUND LEVEL dB(A)
HT Series 360° Swivel Gearcase Models												
AE(P)(D)(J)4B66250B	6000	250	185	315	5.3	12	305	12	66	2.6	0.75	66
AE(P)(D)(J)4B66425B	6000	425	315	165	5.3	12	305	12	66	2.6	0.75	66
AE(P)(D)(J)4B66625B	6000	625	460	106	5.5	12	305	12	66	2.6	0.75	66
AE(P)(D)(J)4B66925B	6000	925	682	72	5.5	12	305	12	66	2.6	0.75	66
AE(P)(D)(J)4B771200B	7000	1200	885	65	7.3	16	310	12.2	76	3.0	1	66
AE(P)(D)(J)4B773000B	7000	3,000	2,213	25	8.2	18	345	13.6	76	3.0	1	66
AE(P)(D)(J)4B884200B1	8000	4,200	3,100	12	11.8	26	391	15.4	86	3.6	1	66
AE(P)(D)(J)4B884200B	8000	4,200	3,100	12	11.8	26	391	15.4	86	3.6	1.5	66
AE(P)(D)(J)4B898100B*	8000	8,100	6,000	5	16.4	36	429	16.9	101	4.0	1.5	66
AE(P)(J)4B998100B*	9000	8,100	6,000	2.3	21.8	48	544	21.4	104	4.1	1.5	66
Models for Extreme Duty / Low Power Environments												
Wind Series												
AE(P)(D)(J)4W872800B	8000	2,800	2,065	9	10.0	22	328	12.9	76	3.0	1	66
AE(P)(D)(J)4W885000B1*	8000	5,000	3,700	4.5	11.8	26	391	15.4	86	3.6	1.0	66
AE(P)(D)(J)4W885000B*	8000	5,000	3,700	4.5	11.8	26	391	15.4	86	3.6	1.5	66

* 8,100 Nm - 17,000 Nm models are not supported by the Gen III controller platform. The Gen IV controller platform is required.

AIMCO can provide customized tooling solutions for even the most unique applications. Let us propose a solution tailored to your needs. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.

ACRADYNE HIGH TORQUE DC ANGLE TOOLS

AcraDyne HT DC Angle Tools provide the perfect solution for space-limited applications. Compact, durable head houses a precision right-angle gearset that fits into the tightest spaces

FEATURES AND BENEFITS

- Transducerized closed loop control at the output like all AcraDyne HT-Series tools
- These low-profile head, small-diameter, lever-operated tools, with the torque measured at the output, offer a unique solution
- The torque reported is the torque delivered
- One of the most accurate high-torque right-angle tools in the world
- Smallest tools of their kind on the market
- Same durable, high-cycle gearing as our other HT-series tools
- Models up to 17,000 Nm available upon request
- These models are fixtured tools



AEN356540A



AEN3571000A




AEN3571600A



AEN3572600A

5000 Series HT Angle Tool Specifications

MODEL	MAX. TORQUE*		TORQUE RANGE		FREE SPEED RPM	WEIGHT		OUTPUT SQ. DRIVE	DIMENSIONS									
	NM	FT-LB	NM	FT-LB		LB	KG		A	B	C	D	E	A	B	C	D	E
AEN356540A	540	398	135 - 540	100 - 398	109	13.1	5.95	3/4"	22.58	573.6	2.31	58.7	4.75	120.6	4.05	102.8	1.33	33.7
AEN3571000A	1,000	737	250 - 1,000	184 - 737	61	16.3	7.39	1"	22.92	582.2	2.31	58.7	5.36	136.1	4.44	112.7	1.53	38.7
AEN3571600A	1,600	1,180	400 - 1,600	295 - 1,180	33	16.7	7.57	1"	22.92	582.2	2.31	58.7	5.36	136.1	4.44	112.7	1.53	38.7
AEN3572600A	2,600	1,917	650 - 2,600	479 - 1,917	21	18.5	8.40	1"	22.92	582.2	2.31	58.7	6.77	171.9	5.86	148.8	1.53	38.7

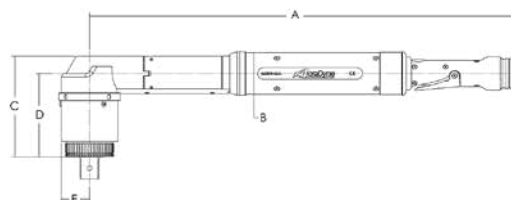

ACRADYNE HIGH TORQUE DC ANGLE TOOLS

A BETTER ANGLE ON BIG JOBS



AcraDyne HT DC Angle Nutrunner is **THE** Tool
for Servicing Blades on Wind Turbines



This **unique tool configuration**, built with all of the **AcraDyne HT advantages**, is made in a size that **allows access to blade bolts** that cannot be easily accessed by other continuous drive tools. The **360° swivel gearcase** allows for precise placement of the tool reaction bar against reactive surfaces for ease of use.



AcraDyne[®] **HT**
A Division of AIMCO

ACRADYNE HIGH TORQUE DC ANGLE TOOLS

AcraDyne's HT DC angle nutrunner is one of the smallest tools of its kind on the market. A powerful motor combined with a short-length handle and a 360° swivel gearcase gives you ultimate flexibility in limited-space applications.

FEATURES AND BENEFITS

- Easy access to previously hard-to-reach blade bolts
- Faster speed than hydraulic tools
- Acquires data in both loosening and retightening directions
- Preset strategies and sequencing for ease of use
- Most intuitive user interface in the industry for setup and data transfer
- Slip ring gearbox for 360° reaction bar movement
- Dual-lever option available
- Measures traceable, dynamic torque directly at the square drive, and the built-in transducer ensures accurate torque values. The torque reported is the torque delivered
- One of the most accurate high-torque right-angle tools in the world
- Same durable, high-cycle gearing as AcraDyne's industry-leading HT series tools
- Available with an optional rugged, weather-resistant carrying case




Custom reaction bars available

HT DC Angle Tool Specifications

MODEL*	MAX. TORQUE		TORQUE RANGE		FREE SPEED RPM	LENGTH (minus reaction bar)		WEIGHT		OUTPUT SQ DRIVE
	NM	FT-LB	NM	FT-LB		IN	MM	LB	KG	
AEN4B771200B(DL)	1,200	885	240 - 1,200	177 - 885	38	16.6	422	17.9	8.1	1"
AEN4B773000B(DL)	3,000	2,200	600 - 3,000	443 - 2,200	15	16.6	422	20.4	9.3	1"

* Add "DL" to Part Numbers for Dual Lever

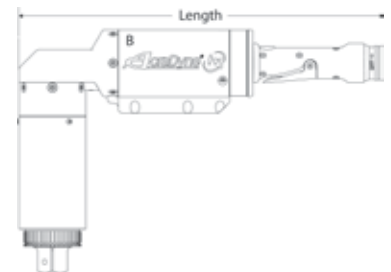

Gen IV iEC4W Field Controller: High Torque with High Tech

The Gen IV Field Controller (see page 41) is the core of the modular AcraDyne DC system. One controller will command any tool in the AcraDyne line – including the HT DC Angle Tool – from 1 Nm to 17,000 Nm, all with the same modular standard cable design.

ACRADYNE HIGH TORQUE DC DUAL-LEVER TOOLS

HIGH TORQUE DUAL-LEVER TOOLS

Provides Additional Safety by Avoiding Accidental Tool Start

FEATURES AND BENEFITS

- Built-in integral transducer for optimal monitoring and control
- One of the most accurate high-torque tools in the world
- 250 Nm – 17,000 Nm
- Two-Hand No Tie Down Operation
 - No Tie Down Control: Operator must have both hands on and activating the dual-starting mechanisms simultaneously. Both hands must remain in position, activating the dual controls, at all times in order for the tool to operate.
- Additional safety when using a tool with a reaction bar or nose extension. Operator's hands remain on the controls and not in a position where they could be impacted by reaction devices
- Hands stay clear of application
- Helps avoid accidental starting of the tool
- Available in Fixtured (F), J-Handle (J), Straight (S), as well as dual-handle configurations
- Designed and **MADE IN THE USA**



AEJ Type



AEF Type



AES Type

HT Dual-Lever Nutrunners: **SAFETY** is **VITAL** in Critical Bolting

AcraDyne's Nutrunners are designed with ultimate operator safety in mind. The optional dual-lever design helps prevent:



Injuries from Accidental Tool Start

Two-hand operation with no tie-down feature requires the operator to use both hands on the trigger simultaneously. This eliminates the possibility of accidental tool start and keeps both of the operator's hands out of harm's way.



Strain Caused by Awkward Tool Operation

Multiple handle styles ensure the safest, most ergonomic tool for your specific application.



Hand and Finger Trauma

Significantly reduce the risk of crushed or mutilated fingers from unintended tool start.

Protect your most valuable asset – your tool operator.

ACRADYNE HIGH TORQUE DC DUAL-LEVER TOOLS



HT Fixed Gearcase Dual-Lever Tool Specifications

DUAL LEVER		APPROX. TORQUE		APPROX. SPEED	WEIGHT		LENGTH		DIA.		DRIVE	SOUND LEVEL
MODEL	SERIES	NM	FT-LB	RPM	KG	LB	MM	IN	MM	IN	IN	dB(A)
HT Series Fixed Gearcase: Dual-Lever Models												
AE(S)(F)4A66250BDL	6000	250	185	315	3.9	9	203	8	66	2.6	0.75	66
AE(S)(F)4A66425BDL	6000	425	315	165	3.9	9	203	8	66	2.6	0.75	66
AE(S)(F)4A66625BDL	6000	625	460	106	4.1	9	203	8	66	2.6	0.75	66
AE(S)(F)4A66925BDL	6000	925	682	72	4.1	9	203	8	66	2.6	0.75	66
AE(S)(F)4A771200BDL	7000	1,200	885	65	5.9	13	208	8.2	76	3.0	1	66
AE(S)(F)4A773000BDL	7000	3,000	2,213	25	6.8	15	243	9.6	76	3.0	1	66
AE(S)(F)4A898100BDL*	8000	8,100	6,000	5	15.0	33	327	12.9	101	4.0	1.5	66
AE(S)(F)4A998100BDL*	9000	8,100	6,000	2.3	20.4	45	456	18	104	4.1	1.5	66

* 8,100 Nm – 17,000 Nm models are not supported by the Gen III controller platform. The Gen IV controller platform is required.

For Straight Type tools Choose the position of the handle by adding (L) for left side and (R) for right side

HT 360° Swivel Gearcase Dual-Lever Tool Specifications

DUAL LEVER		APPROX. TORQUE		APPROX. SPEED	WEIGHT		LENGTH		DIA.		DRIVE	SOUND LEVEL
MODEL	SERIES	NM	FT-LB	RPM	KG	LB	MM	IN	MM	IN	IN	dB(A)
HT Series 360° Swivel Gearcase: Dual-Lever Models												
AE(S)(F)4B66250BDL	6000	250	185	315	4.6	10.5	254	10	66	2.6	0.75	66
AE(S)(F)4B66425BDL	6000	425	315	165	4.6	10.5	254	10	66	2.6	0.75	66
AE(S)(F)4B66625BDL	6000	625	460	106	4.8	10.5	254	10	66	2.6	0.75	66
AE(S)(F)4B66925BDL	6000	925	682	72	4.8	10.5	254	10	66	2.6	0.75	66
AE(S)(F)4B771200BDL	7000	1,200	885	65	6.6	14.5	259	10.2	76	3.0	1	66
AE(S)(F)4B773000BDL	7000	3,000	2,213	25	7.5	16.5	294	11.6	76	3.0	1	66
AE(J)4B898100BDL*	8000	8,100	6,000	5	16.4	36	429	16.9	101	4.0	1.5	66
AE(J)4B998100BDL*	9000	8,100	6,000	5	15.7	33.3	327	12.9	101	4.0	1.5	66

* 8,100 Nm – 17,000 Nm models are not supported by the Gen III controller platform. The Gen IV controller platform is required.

For Straight Type tools Choose the position of the handle by adding (L) for left side and (R) for right side

**AIMCO can provide customized tooling solutions for even the most unique applications. Let us propose a solution tailored to your needs.
Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.**

ACRADYNE HTXD EXTREME DUTY HIGH TORQUE TOOLS



Full-Strength Tools for Big Jobs

AcraDyne's HTXD Nutrunner/Gen IV Controller System is one of the Most Accurate High-Torque Bolting Systems in the World



- Measures traceable, dynamic torque directly at the square drive, and the built-in transducer ensures accurate torque values. The torque reported is the torque delivered
- Available in J handle and Pistol handle configurations
- Extreme Duty engineering with motors rated for bolting applications near continuous duty
- Dual J-Handle models have additional safety features: Operators must use both hands on the trigger simultaneously, eliminating the possibility of accidental tool start and keeping both of the operator's hands out of harm's way
- Wide range of tightening strategies available including Torque Control, Torque plus Angle, Angle Control, and Yield Control

ACRADYNE HTXD EXTREME DUTY HIGH TORQUE TOOLS



AcraDyne's HTXD Systems measure traceable, dynamic torque directly at the square drive and the built-in transducer ensures accurate torque values.

- Accuracy and traceability are assured from the first fastening to the last
- Torque reported is the torque delivered
- Accuracy not affected by gearing efficiency

Tools with the gearing after the transducer cannot claim this!



J-Handle Model
12,000 Nm



Pistol Model
12,000 Nm



12,000 Nm



17,000 Nm

HT 360° Swivel Gearcase Bolting Tools for Extreme Duty

MODEL	SERIES	APPROX. TORQUE NM	FT-LB	APPROX. SPEED RPM	WEIGHT * KG	LB	LENGTH ** MM	IN	DIA. MM	IN	DRIVE IN	SOUND LEVEL dB(A)
360° Swivel Gearcase Models		AEJ = J Handle/Axial Type		AEP = Pistol Type		Single-Handle Models Standard. Add "DL" to Model Numbers for Dual Handles (AEJ models only)						
AEP4W998100B	9000	8,100	6,000	2.3	21.8	48	544	21.4	104	4.1	1.5	66
AEJ4W998100B(DL)	9000	8,100	6,000	2.3	21.8	48	544	21.4	104	4.1	1.5	66
AEP4W9X12000B	9X	12,000	8,850	2	31.8	70	572	22.5	131	5.2	1.5	66
AEJ4W9X12000B(DL)	9X	12,000	8,850	2	31.8	70	572	22.5	131	5.2	1.5	66
AEP4W9Y17000B*	9Y	17,000	12,500	1	42.6	94	381	15	153	6.0	2.5	66
AEJ4W9Y17000B(DL)	9Y	17,000	12,500	1	42.6	94	381	15	153	6.0	2.5	66

* Weight is tool only w/o Socket and Reaction Bar

** Length of dual-trigger tools is approximately 6 mm / 0.2" shorter than single-trigger tools.

ACRADYNE HTXD EXTREME DUTY HIGH TORQUE TOOLS



EXTREME DUTY

Ultimate Operator Safety for Lifting Larger Bolting Tools


AcraDyne's XD Lift Assist device for tool suspension and use allows for easy handling of equipment that otherwise would need two operators to position.

FEATURES AND BENEFITS

- Lift can be assembled/disassembled in less than 15 minutes
- Can be used inside wind turbines at deck platforms
- Designed for a wide variety of applications including narrow tower platforms and ladder spaces
- Lift Assist weighs 30 kg / 67 lbs
- Weight of unit is below the weight allowed to be lifted by personnel inside or outside the tower
- Disassembled Lift Assist is transported in a load-rated bag that can be lifted manually or by hoist within the tower
- Device is rated for loads up to 200 kg / 440 lbs
- Full-swivel wheels with locking brakes make movement and repositioning easy



AXD-2000
Lift Assist

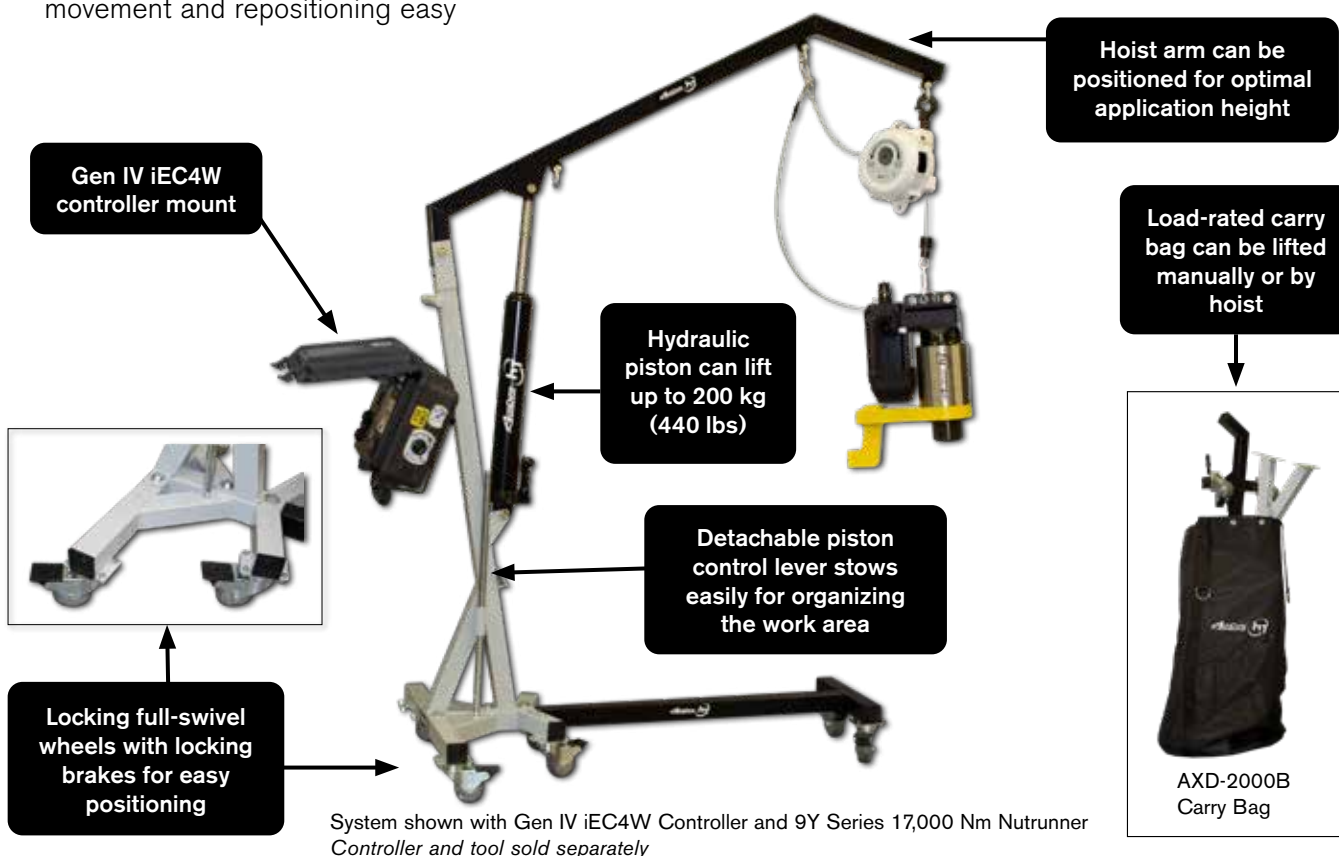

ACRADYNE GEN IV FIELD CONTROLLER

Improved design of AcraDyne's powerful Gen IV Field Controller means increased durability, lighter weight, and quick and easy setup



FEATURES AND BENEFITS

- Optimized for extreme duty applications >5,000 Nm
- The Gen IV Controller utilizes three tightening strategies:
 - Torque Control: Drive the tool to a pre-set Target Torque
 - Angle Control: Drive the tool to or measure a pre-set Degree of Angle
 - Yield Control: Drive the tool to the Fastener Yield Point to achieve maximum clamp load
- Multiple fastening strategies – Program up to 256 parameters with as many as 20 steps
- Jobs capability – 99
- Real-time curve viewing. Curve storage – 20,000
- Rundown storage – 1,000,000
- Event log – 5,000
- Backup & restore through USB
- Weatherproof, rugged case protects from the toughest environments
- Compact design weighs less than 20 lbs
- Ground clamp is quick and easy to set up and eliminates additional parts that are substantially heavy
- Optional tool fan kit helps prevents tool overheating
- Capable of interface with the AcraDyne series Dual-Lever tools that offer two-hand, no tie down functionality
- 110V – 220V compatible
- Single Ethernet port increases speed of connectivity, signal stability, and signal consistency
- Commands any tool in the AcraDyne line from 1 Nm to 17,000 Nm, all with one cable

PERQ Advantages

	Replace multiple conventional tools with one flexible controlled system Quick and easy setup Fan kit reduces downtime due to tool overheating
PRODUCTIVITY	
	Compact, rugged case with easy carry handle makes field use easy and convenient Lightweight for operator comfort
ERGONOMICS	
	Weatherproof rugged case Industrial touch screen
RELIABILITY	
	Controlled tightening and consistent torque control improves quality Process controls reduce human error, and ensure no missed fasteners, stripped threads, rehits, or damaged threads No premature shut-off
QUALITY	

MODEL	DESCRIPTION	DIMENSIONS W x D x H	WEIGHT LB	KG
iEC4WF	Field use controller for use with 110V or 220V service	16.1" x 12.8" x 6.9" 408 mm x 326 mm x 175 mm	18.5	8.4
Additional Field Controllers				
iEC4W1	Field use controller with isolation transformer for use with 110V service	16.1" x 12.8" x 6.9" 408 mm x 326 mm x 175 mm		
iEC4W2	Field use controller with isolation transformer for use with 220 V service	16.1" x 12.8" x 6.9" 408 mm x 326 mm x 175 mm		




NOSE EXTENSIONS

FEATURES AND BENEFITS

- Ideal for hard-to-reach applications when a torque tube, or arm, is not desirable
- A cost-effective, more flexible option compared to a multiple spindle system
- Common applications:
 - Wheel install and repair stations
 - Large flange assembly
 - Mining vehicle shovel bolts
 - Railway equipment maintenance
 - Oil and gas industry well fixtures



28050

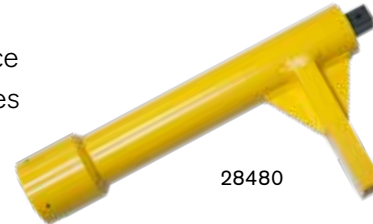

28480

HT GEARHEAD TOOLS

FEATURES AND BENEFITS

- Application-specific, custom made tools fit virtually any application
- Same durable gearing as found on AcraDyne's standard HT series tools
- Model types available:
 - HT Offset Gearhead tools
 - HT Right Angle with Offset Gearhead tools
 - HT Right Angle Air tools with Offset Gearhead


Custom accessories are available for your application. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.



ACRADYNE HIGH TORQUE ACCESSORIES

ACCESSORIES

Custom accessories are available for your application; contact an AIMCO Customer Service Associate for details, 1-503-254-6600, or toll free 1-800-852-1368.

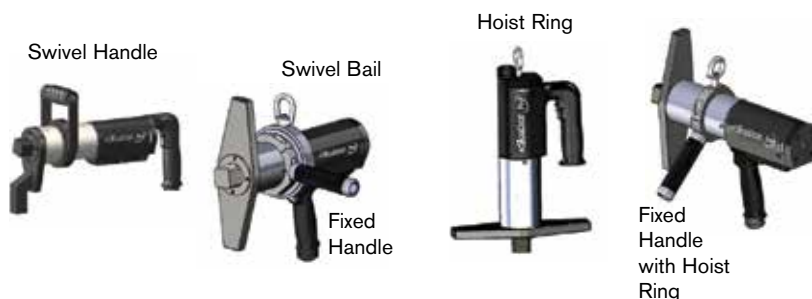

MODEL	DESCRIPTION
26477	Swivel Bail, 6000 Series
26327	Swivel Bail, 7000 Series
26630	Swivel Bail, 8000 Series
26478	Swivel D-Handle, 6000 Series
26328	Swivel D-Handle, 7000 Series
25291	Swivel D-Handle, 8000 Series
26479	Stationary Bail, 6000 series (26336 handle not included)
26332	Stationary Bail, 7000 series (26336 handle not included)
25289	Stationary Bail, 8000 series (26336 handle not included)
26336	Fixed Handle (for use with 26479, 26332, 25289)
26337	Rear Fixed Hoist Ring, 6000/7000/8000 Series Pistols
28514	Rear Folding Hoist Ring Kit for 8000 Series Pistols
28549	Sliding Spindle, 6000 Series
27045	Sliding Spindle, 7000 Series
30300	Sliding Spindle, 8000 Series

REACTION BARS



HT tool includes a standard, spline attachment reaction device. Custom reaction devices are available; contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.

	MODEL	DESCRIPTION
	26810	6000 Series
	26800	7000 Series
	25277	8000 Series
	27255	9000 Series
	30303	X Series
	26815	2.375" Offset, 6000 Series
	26885	4.00" Offset, 6000 Series
	27200	3.10" Offset, 7000 Series
	26890	4.00" Offset, 7000 Series
	25274	3.35" Offset, 8000 Series
	25275	4.00" Offset, 8000 Series
	26840	3.35" Offset, 9000 Series
	30306	5.00" Offset, X Series
	31273	5.00" Offset, Y Series
	26830	6000 Series
	26820	7000 Series
	25278	8000 Series
	25276	3.35" Offset, 8000 Series

PROTECTIVE COVERS

Durable protective covers prevent marring and damage.



MODEL	DESCRIPTION
BJ10078	Protective Cover, 6000 Series
BJ10077	Protective Cover, 7000 Series
BJ10076	Protective Cover, 8000 Series

HEAVY DUTY WATER-RESISTANT CASE FOR HT TOOLS



Made of ultra high-strength polypropylene copolymer resin, this water resistant utility case protects AcraDyne HT tools.

- Molded-in hinge, trigger-release latch system, and snap-down cushion grip handle
- Resistance to UV, solvents, corrosion, and impact damage

MODEL	COMPATIBLE TOOLS	DESCRIPTION
CC-6000-F	6000 series	Case with molded foam insert
CC-6000-FIP	6000 series	Case with foam in place
CC-7000-F	7000 series	Case with molded foam insert
CC-7000-FIP	7000 series	Case with foam in place
CC-8000-F	8000 series	Case with molded foam insert
CC-8000-FIP	8000 series	Case with foam in place

Please contact an AIMCO Customer Service Associate for details, 1-503-254-6600, or toll free 1-800-852-1368.

DC TOOLS: TOOL/SPINDLE SELECTION GUIDE

		LENGTH		WEIGHT		TORQUE, Nm																											
MODEL	RPM**	IN	MM	LB	KG	5	10	15	20	25	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450						
ANGLE																																	
AEN4C12004B	3,111	11.65	295.9	2.0	0.91																												
AEN4C12009B	1,750	11.00	279.5	2.2	1.00																												
AEN4C12014B	875	11.66	296.4	2.2	1.00																												
AEN4C12018B	691	11.66	296.4	2.2	1.00																												
AEN4C12022B	560	11.66	296.4	2.2	1.00																												
AEN32015C	1,481	14.6	371.0	2.7	1.22																												
AEN32025C	833	14.6	371.0	2.7	1.22																												
AEN32030C	803	14.4	366.2	2.8	1.27																												
AEN32040C	574	14.4	366.2	2.8	1.27																												
AEN33042C	1,095	16.6	422.3	4.4	2.00																												
AEN33053C	1,095	16.6	422.3	4.4	2.00																												
AEN33060C	845	18.9	480.5	6.6	2.99																												
AEN33090C	568	18.9	480.5	6.6	2.99																												
AEN33120C	442	21.0	533.5	9.3	4.22																												
AEN33200C	245	23.2	589.6	9.4	4.26																												
AEN33210C	234	23.6	599.9	10.0	4.54																												
AEN33300C	151	23.6	599.0	10.0	4.54																												
AEN33375C	151	23.6	599.0	10.0	4.54																												
AEN35090B	607	22.6	573.7	6.9	3.13																												
AEN35140B	472	22.5	571.9	10.4	4.72																												
AEN35175B	384	22.5	571.9	10.5	4.76																												
AEN35225B	291	22.9	581.1	12.3	5.58																												
AEN35285B	236	22.9	581.1	12.3	5.58																												
AEN35350B	191	22.9	581.1	12.3	5.58																												
INLINE																																	
AES4A12003BQ	2,625	11.12	282.7	2.0	0.91																												
AES4A12006BQ	2,625	11.12	282.7	2.0	0.91																												
AES4A12011BV	1,313	11.44	290.5	2.2	1.00																												
AES4A12014BV	1,037	11.44	290.5	2.2	1.00																												
AES4A12018BV	840	11.44	290.5	2.2	1.00																												
AES4A12022BV	656	11.44	290.5	2.2	1.00																												
AES32010CV	2,222	13.9	351.7	2.5	1.13																												
AES32020CV	1,250	13.9	351.7	2.5	1.13																												
AES32025CV	893	13.9	351.7	3.2	1.45																												
AES32038CV	595	16.7	424.0	4.2	1.91																												
AES33040CV	1,314	18.2	463.4	6.4	2.90																												
AES33060CV	883	18.2	463.4	6.4	2.90																												
AES33100CV	489	22.6	573.0	8.1	3.67																												
AES33150CV	329	22.6	573.0	8.1	3.67																												
AES33230CV	221	22.6	573.0	8.1	3.67																												
AES33230C-2	221	22.6	573.0	8.1	3.67																												
AES33400CV	122	24.9	632.5	130*	5.90*																												
AES33600CV**	82	24.9	632.5	130*	5.90*																												
AES35075AV	944	21.9	555.2	9.2	4.17																												
AES35090AV	767	21.9	555.2	9.2	4.17																												
AES35110AV	634	21.9	555.2	9.2	4.17																												
AES35135AV	515	21.9	555.2	9.2	4.17																												
AES35170AV	418	21.9	555.2	9.2	4.17																												
AES35280A	236	24.2	615.1	12.8	5.81																												
AES35350A	192	24.2	615.1	12.8	5.81																												
AES35420A	159	24.2	615.1	12.8	5.81																												
AES35515A***	129	24.2	615.1	12.8	5.81																												
AES35635A****	104	24.2	615.1	12.8	5.81																												

* Includes reaction bar and fixture nut.

** Torque Range: 120-480 Nm Max Torque: 600 Nm

*** Torque Range: 128-515 Nm

**** Torque Range: 159-635 Nm

Recommended Torque Range

Continued on next page

DC TOOLS: TOOL/SPINDLE SELECTION GUIDE

MODEL	RPM**	LENGTH		WEIGHT		TORQUE, Nm																							
		IN	MM	LB	KG	5	10	15	20	25	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450		
PISTOL																													
AEP4_12003B_	2,625	7.3	186.3	2.2	1.00	■																							
AEP4_12006B_	2,625	7.3	186.3	2.2	1.00	■	■																						
AEP4_12011BV	1,313	8.0	203.3	2.3	1.04	■	■	■																					
AEP4_12014BV	1,037	8.0	203.3	2.3	1.04	■	■	■	■																				
AEP4_12018BV	840	8.0	203.3	2.3	1.04	■	■	■	■	■																			
AEP4_12022BV	656	8.0	203.3	2.3	1.04	■	■	■	■	■	■																		
AEP4_22020BV	1,313	8.7	219.9	2.4	1.09	■	■	■	■	■	■																		
AEP4_22025BV	1,037	8.7	219.9	2.4	1.09	■	■	■	■	■	■	■																	
AEP4_22030BV	840	8.7	219.9	2.4	1.09	■	■	■	■	■	■	■	■																
AEP4_22035BV	747	8.7	219.9	2.4	1.09	■	■	■	■	■	■	■	■	■															
AEP4_22040BV	656	8.7	219.9	2.4	1.09	■	■	■	■	■	■	■	■	■	■														
AEP35075AV	944	16.0	405.2	9.2	4.17					■	■	■	■	■	■														
AEP35090AV	767	16.0	405.2	9.2	4.17					■	■	■	■	■	■	■													
AEP35110AV	634	16.0	405.2	9.2	4.17					■	■	■	■	■	■	■	■												
AEP35135AV	515	16.0	405.2	9.2	4.17					■	■	■	■	■	■	■	■	■											
AEP35170AV	418	16.0	405.2	9.2	4.17					■	■	■	■	■	■	■	■	■	■										
AEP35280A	236	18.4	468.2	13.6	6.17					■	■	■	■	■	■	■	■	■	■	■	■								
AEP35350A	192	18.4	468.2	13.6	6.17					■	■	■	■	■	■	■	■	■	■	■	■	■	■						
AEP35420A	159	18.4	468.2	13.6	6.17					■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
AEP35515A*	129	18.4	468.2	13.6	6.17					■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■		
AEP35635A**	104	18.4	468.2	13.6	6.17					■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
TUBENUT																													
AET4A12018B	516	15.41	288.1	3.1	1.41	■	■	■																					
AET4A12025B	387	15.41	288.1	3.1	1.41	■	■	■	■																				
AET4A12025B-KD	387	15.9	404.9	3.1	1.41	■	■	■	■	■																			
AET32020C	622	17.2	436.4	3.1	1.41	■	■	■	■	■																			
AET32025C	466	17.8	450.9	4.0	1.81	■	■	■	■	■	■																		
AET32035C	347	18.1	460.5	4.5	2.04	■	■	■	■	■	■	■																	
AET32050C	257	18.8	478.0	5.6	2.54	■	■	■	■	■	■	■	■																

* Torque Range: 128 - 515 Nm

** Torque Range: 159 - 635 Nm



High Torque Series

MODEL	RPM**	LENGTH		WEIGHT		TORQUE, N.m																							
		IN	MM	LB	KG	50	100	200	300	400	500	600	850	1100	1200	1300	1500	2000	2500	3000	4000	5000	6500	8100	12000	17000			
()4(A)(B)66250B	315	10	254	10.5	4.6																								
()4(A)(B)66425B	165	10	254	10.5	4.6																								
()4(A)(B)66625B	106	10	254	10.5	4.8																								
()4(A)(B)66925B	72	10	254	10.5	4.8																								
()4(A)(B)771200B	65	10.2	259	14.5	6.6																								
()4(A)(B)773000B	25	11.6	294	16.5	7.5																								
()4(W)872800BDL	9	13.1	334	20.5	9.3																								
()4(A)(B)884200B1	12	13.4	340	24.5	11.1																								
()4(A)(B)884200B	12	13.4	340	24.5	11.1																								
()4(W)884650B1DL	9	15.6	397	24.5	11.1																								
()4(W)884650BDL	9	15.6	397	24.5	11.1																								
()4(A)(B)885000B	9	13.4	340	24.5	11.1																								
()4(A)(B)896500B	7	14.9	378	34.5	15.7																								
()4(A)(B)898100B	5	14.9	378	34.5	15.7																								
()4(W)896500BDL	5	15.1	384	33.3	15.7																								
()4(A)(B)9X12000B	3.5	22	564	52.5	24																								
()4(A)(B)9Y17000B	3.0	22	564	65	29.5																								


Recommended Torque Range

ACRADYNE ACCESSORIES

CABLE ASSEMBLIES

The AcraDyne DC electric nutrunner tool system uses a single cable to carry all necessary conductors for superior ergonomics and durability.

- Flexible polyurethane cover for maximum durability, abrasion and transmission fluid resistant
- Quick disconnects at both ends facilitate tool changeover and troubleshooting
- The CAN data/signal is via RJ45 for products such as the KDM, socket tray or computer

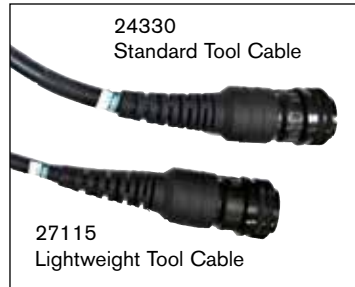

MODEL	DESCRIPTION	LENGTH	
		M	FT
TOOL CABLES			
24330	Cable G3 Tool Cable 3M	3	9.8
25350	Cable G3 Tool Cable 5M	5	16.4
24320	Cable G3 Tool Cable 10M	10	32.8
27110	Cable G3 Tool Cable 3M Lightweight*	3	9.8
27115	Cable G3 Tool Cable 5M Lightweight*	5	16.4
27122	Cable G3 Tool Cable 10M Lightweight*	10	32.8
EXTENSIONS			
24320	Extension cable 10M	10	32.8
25518	Extension cable 20M	20	65.6

*Lightweight cables are for use only with 1000 & 2000 Series tools.

CABLE ADAPTERS AND CONNECTORS

MODEL	DESCRIPTION
Adapters and Connectors	
	25646 G1 iEC to G3 Cable Adapter
	26934 G3 iEC to G1 Cable Adapter
	27210 G3 Tool to G1 Cable Adapter
	26364 Right Angle Cable Adapter
	26594 Conversion Kit G1 iEC to G3 iEC
	27370 Conversion Kit G3 iEC to G1 iEC
	25491 Breakaway Cable Connector – Ensures disconnect of cable should stress in excess of 40 lbs. occur (see page 47)
	30355 Y Cable Harness connects G4 iAC controller and controller's I/O to tool's EC/MCCBL cable. Compatible with UA-40S(D)MC, UA-50S(D)MC, UA-60S(D)MC, UA-70SMC, and UA-150MC tools.

DATA INTERFACE OPTION

MODEL	DESCRIPTION
Data Interface Options	
	27348 I/O Wiring Connector – Simple module to facilitate connections to I/O on iEC Controllers
	28292 System Port Cable, USB 2.0 Cable, A Male to B Male, 3M

CABLE TESTER UNIT

AcraDyne's Cable Tester Unit helps diagnose and verify functionality of AcraDyne Tool Cables.

- Eliminate guesswork as to whether cable is damaged or is functioning within specifications
- Verifies each specific conductor within the cable for continuity

MODEL	DESCRIPTION
	26700 Cable Tester Unit, G3
	26709 Adapter, G3 Tool to G1 Cable (Cable Tester only)

ACRADYNE ACCESSORIES


BREAKAWAY CABLE CONNECTOR

Innovative Quick Disconnect Device reduces cable damage from dropping tools or pulling cables when in use.



25491
Breakaway Cable
Connector

- Can be placed at the tool or at the controller
- Easily snaps into place
- Connects using magnetic force
- Adjust holding force by removing or adding magnets. Max holding force is 40 lbs / 18 kg

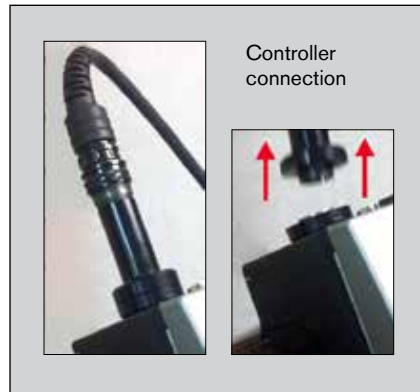

FRL ASSEMBLY KIT

For use with the iAC controller, AcraDyne's FRL assembly kit includes a regulator and solenoid. The kit attaches to the controller or can operate as a stand-alone unit.



30850 FRL Assembly Kit



Top view

BAR CODE SCANNER



28859
Bluetooth®-Enabled Scanner Kit

Sturdy bar code scanners allow you to easily scan small, stacked, or poorly printed, one-dimensional bar codes. Kit includes a cradle, power supply, and USB/Ethernet cable.


- Scratch proof, tempered glass exit window
- Single-circuit board construction eliminates common interconnection failures
- Industrial long-life charging contacts can withstand 250,000+ insertions into cradle
- Wireless scanner enables users to hold scanner at any angle

MODEL	DESCRIPTION
20400	RS232 Barcode Reader Kit
28859	RS232 Wireless Barcode Reader Kit

SOCKET TRAY

Socket trays, for use with iEC and UEC Controllers, are supplied with blank socket pucks machined to fit specific sockets for the application. AIMCO provides this machining as an additional service. When ordering, please specify the outer dimensions of the sockets you plan to use, and whether you would like a quote for the machining service.

- Simply remove the assigned socket to select the application to be run
- Quick and easy set up. Parameters assigned to socket position automatically
- Optional self-illuminating socket receptacles
- Delrin® blanks may be easily machined by the customer to accommodate custom socket profiling
- Nothing to break, wear out, or maintain
- Proximity sensors detect presence of socket

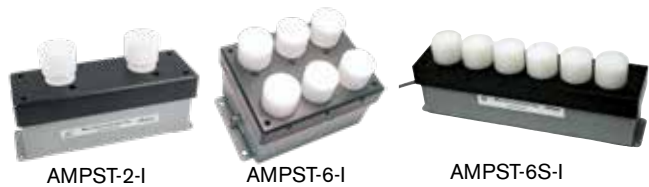

MODEL	DESCRIPTION
AMPST-2-I	2-Position Socket Tray for iEC Controllers, 2 x 1, 1.25" Socket
AMPST-2-U	2-Position Socket Tray for UEC Controllers, 2 x 1, 1.25" Socket
AMPST-4-I	4-Position Socket Tray for iEC Controllers, 2 x 2, 1.25" Socket
AMPST-4-U	4-Position Socket Tray for UEC Controllers, 2 x 2, 1.25" Socket
AMPST-6S-I	6-Position Socket Tray for iEC Controllers, 6 x 1, 1.25" Socket
AMPST-6S-U	6-Position Socket Tray for UEC Controllers, 6 x 1, 1.25" Socket
AMPST-6-I	6-Position Socket Tray for iEC Controllers, 3 x 2, 1.25" Socket
AMPST-6-U	6-Position Socket Tray for UEC Controllers, 3 x 2, 1.25" Socket
AMPST-8-I	8-Position Socket Tray for iEC Controllers, 4 x 2, 1.25" Socket
AMPST-8-IL	8-Position Socket Tray for iEC Controllers, 4 x 2, 2.0" Socket
AMPST-8-U	8-Position Socket Tray for UEC Controllers, 4 x 2, 1.25" Socket

Socket trays with 6 - 8 positions are available in varied configurations to suit workspace requirements (straight or double rows). Let your AIMCO representative know of your specific requirements when inquiring.

ANGLE TOOL BODY JACKETS

Keep tools protected with AIMCO's tool Body Jackets.



MODEL	DESCRIPTION
BJ10051	For 1000 series angle tools
BJ10052	For 2015, 2025 series angle tools
BJ10053	For 2030, 2040, 2055 series angle tools
BJ10054	For 3060, 3090 series angle tools
BJ10055	For 3120, 3200 series angle tools

TOOL STORAGE

Tool baskets and tool hangers are a great way to keep a tool in place when not being used.

UNIVERSAL TOOL BASKET

Interchangeable among angle head and pistol grip tool models throughout the industry.



VERTICAL TOOL HANGER

Designed for AcraDyne Gen 1/Gen 2 tools.



23730

LIGHT TOWER

Cost- and energy-efficient LED light tower is visible from any direction, angle, and distance

- Two built-in alarms (FB Type) with selectable sound patterns
- Adjustable Volume (Max. 85 dB at 1 m)
- Tower includes red, yellow, green, blue, and clear lenses



28489 Light Tower Bracket for Gen IV Controller

CONTROLLER BRACKETS



MODEL	DESCRIPTION
20322	Basic wall-mounting plate
20853	Table stand free standing platform
27816	Mounting bracket with internal wireways

TOOL BAILS

- AcraDyne's spring bails are designed for use with any of the AcraDyne 1000, 2000, or 3000 Series tools
- Spring bails snap on quickly and firmly at any place on the body of the tool for perfect balance and secure suspension

MODEL	DESCRIPTION
	25501 Wire Bail for 1000 Series Tools
	27594 Stationary Bail for 1000 Series Tools
	27791 Rotating Bail Assembly for 1000 Series Tools
	26568 Cable Bail to Hang Tool Vertically for Gen III Cables
	21208 Spring Bail for 2000 Series Tools
	23662 Rotating Bail for 2000 Series Tools
	28475 Rotating Bail for AEN33042C and AEN33053C
	23575 Rotating Bail for 3000 Series Tools

MOUNTING BRACKETS

MODEL	DESCRIPTION
	25717 Mounting Bracket for 1000 Series Angle Tools
	25843 Mounting Bracket for 1000 Series Push-To-Start Tools
	26443 Mounting Bracket for 1000/2000 Series Straight and Pistol Tools
	24924 Mounting Flange for 1000/2000 Series Straight and Pistol Tools
	28622 Mounting Flange for 2000 Series Inline Tools
	30340 Mounting Bracket for 2000 Series Angle Tools
	30351 Mounting Bracket, Drive End for 2000 Series Inline Tools
	25718 Mounting Bracket for 3000/5000 Series Angle Tools
	26570 Mounting Bracket for 3000/5000 Series Straight Tools
	25265 Angle head Mounting Bracket (Cradle type) for 3000/5000 Angle Tools over 225 Nm
	26394 Mounting Flange for 5000 Series

ACRADYNE CORDLESS AB SERIES

AcraDyne Cordless AB Series

INNOVATIVE TOOLS IN A POWERFUL PACKAGE

AcraDyne's high-performance cordless tools deliver precise torque and/or angle to the fastener. Innovative technology guarantees repeatable torque results every time, ensuring you meet your most important goal – creating quality products. The tools are available in two model types:

1 AB-MTA
Clutch
Shut-Off
Tool

Measures
Torque and
Reports Angle

2 AB-CTA
Transducer
Shut-Off
Tool

Controls Torque
and Angle



FEATURES AND BENEFITS OF ALL AB TOOLS

- Self-Controlling Tools
 - Can run stand alone or in conjunction with an iBC ACE Platform controller as a line interface (see page 12)
- Tool programming done with no-cost AcraDyne Tool Manager software using USB cable interface to PC
- Selectable vibration alarm provides tactile feedback
- 99 programs with 6 steps per program available
- Job functionality for sequencing and/or bolt counting
- Programmable
 - Torque
 - Angle
 - RPM
 - Time
 - Fastening direction
- Multicolor LED status screen
- 150,000 results stored on-board

TORQUE RANGES

AB-CTA

- Pistol Tool: 1.5–3,000 Nm (torque range for pistol tools includes Ultra Torque models on page 53)
- Straight Tool: 1.5–17 Nm
- Angle Tool: 1.5–130 Nm
- Tubenut Tool: 3.0–20 Nm

AB-MTA

- Pistol Tool: 1.0–17 Nm
- Straight Tool: 1.0–17 Nm
- Angle Tool: 2.5–115 Nm

ACRADYNE CORDLESS AB SERIES



MTA Series

Measures Torque and Reports Angle

The AB-MTA Series controls torque to the fastener with a precision Clutch Shut-Off mechanism. This technology increases productivity by allowing the tool to run at higher speeds and with minimal overshoot. The highly accurate clutch reduces torque reaction transmitted to the operator through its speed of shut-off at the moment reaction forces are generated.






For simple adjustment, the MTA series provides easy clutch access.



MODEL	TORQUE RANGE NM FT-LB		MAX SPEED RPM	DRIVE TYPE	WEIGHT W/O BATTERY KG LB		TOOL DIMENSIONS							
							A		B		C		D	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
Pistol														
ABP-MTA06(Q)(WQ)(BQ)(WBQ)	1.0 - 6	0.8 - 4.4	1,100	1/4" QC	1.25	2.75	9.1	230	1.02	26	8.56	218	4.5	115
ABP-MTA08(Q)(WQ)(BQ)(WBQ)	1.5 - 8	1.1 - 5.9	880	1/4" QC	1.25	2.75	9.1	230	1.02	26	8.56	218	4.5	115
ABP-MTA12(Q)(WQ)(BQ)(WBQ)	2.3 - 12	1.7 - 8.9	629	1/4" QC	1.25	2.75	9.1	230	1.02	26	8.56	218	4.5	115
ABP-MTA17(Q)(WQ)(BQ)(WBQ)	3.5 - 17	2.6 - 12.5	449	1/4" QC	1.25	2.75	9.1	230	1.02	26	8.56	218	4.5	115
Straight														
ABS-MTA06(Q)(WQ)(BQ)(WBQ)	1.0 - 6	0.8 - 4.4	1,100	1/4" QC	1.0	2.2	17.2	437	3.19	81	0.79	20	4.5	115
ABS-MTA08(Q)(WQ)(BQ)(WBQ)	1.5 - 8	1.1 - 5.9	880	1/4" QC	1.0	2.2	17.2	437	3.19	81	0.79	20	4.5	115
ABS-MTA12(Q)(WQ)(BQ)(WBQ)	2.3 - 12	1.7 - 8.9	629	1/4" QC	1.1	2.4	17.2	437	3.19	81	0.79	20	4.5	115
ABS-MTA17(Q)(WQ)(BQ)(WBQ)	3.5 - 17	2.6 - 12.5	449	1/4" QC	1.25	2.75	17.2	437	3.2	81	0.8	20	4.5	115
Angle														
ABN-MTA10(W)(B)(WB)	2.5 - 10	1.9 - 7.4	629	3/8" Sq.	1.35	3.0	17.9	455	3.94	100	1.12	29	4.5	115
ABN-MTA17(W)(B)(WB)	3.5 - 17	2.6 - 12.5	420	3/8" Sq.	1.4	3.1	18.1	461	4.14	105	1.29	33	4.5	115
ABN-MTA24(W)(B)(WB)	5 - 24	3.7 - 17.7	300	3/8" Sq.	1.4	3.1	18.1	461	4.14	105	1.29	33	4.5	115
ABN-MTA36(W)(B)(WB)	8 - 36	5.9 - 26.6	165	3/8" Sq.	1.4	3.1	21.6	547	7	179	1.65	42	4.5	115
ABN-MTA55(W)(B)(WB)	13 - 55	9.6 - 40.6	94	3/8" Sq.	2.7	6.0	22.5	572	7.7	196	1.65	42	4.5	115
ABN-MTA90(W)(B)(WB)	9.6 - 90	13.3 - 66.4	70	3/8" Sq.	2.9	6.4	25.9	658	10.2	259	1.8	46	4.5	115
ABN-MTA115(W)(B)(WB)	23 - 115	17 - 84.8	56	1/2" Sq.	3.1	6.8	28.4	721	13.9	353	2.8	71	4.5	115

W = WiFi option B = Barcode option Q = Quick Change

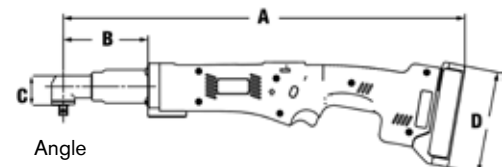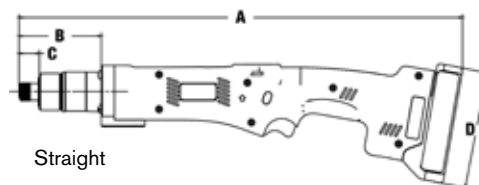

ACRADYNE CORDLESS AB SERIES



CTA Series




Controls Torque and Angle

The AB-CTA Series provides the most sophisticated option in the AcraDyne cordless tool line. The Transducer Shut-Off means precise torque measurement with high accuracy and traceable results. Transducer shut-off allows speed adjustment and provides the ability to reject conditions such as cross threads and double hits on a fastener.



							TOOL DIMENSIONS									
MODEL	TORQUE RANGE		MAX SPEED RPM	DRIVE TYPE	WEIGHT W/O BATTERY		A		B		C		D		E	
	NM	FT-LB			KG	LB	IN	MM	IN	MM	IN	MM	IN	MM		
Pistol																
ABP-CTA12(Q)(WQ)(BQ)(WBQ)	1.5 - 12	1.1 - 8.9	629	1/4" QC	1.15	2.5	9.1	230	1.02	26	8.56	218	4.5	115	—	—
ABP-CTA17(Q)(WQ)(BQ)(WBQ)	3 - 17	2.2 - 12.5	449	1/4" QC	1.15	2.5	9.1	230	1.02	26	8.56	218	4.5	115	—	—
For 200 – 3,000 Nm Pistol Tools, see Ultra Torque models on page 53																
Straight																
ABS-CTA12(Q)(WQ)(BQ)(WBQ)	1.5 - 12	1.1 - 8.9	570	1/4" QC	0.95	2.1	17.2	437	3.19	81	0.79	20	4.5	115	—	—
ABS-CTA17(Q)(WQ)(BQ)(WBQ)	3 - 17	2.2 - 12.5	460	1/4" QC	0.95	2.1	17.2	437	3.19	81	0.79	20	4.5	115	—	—
Angle																
ABN-CTA10(W)(B)(WB)	1.5 – 10	1.1 – 7.4	570	3/8" Sq.	1.35	3.0	17.9	455	3.94	100	1.12	29	4.5	115	—	—
ABN-CTA17(W)(B)(WB)	2.5 – 17	1.8 – 12.5	380	3/8" Sq.	1.4	3.1	18.1	461	4.14	105	1.29	33	4.5	115	—	—
ABN-CTA24(W)(B)(WB)	5 – 24	3.7 – 17.7	300	3/8" Sq.	1.2	2.6	18.1	461	4.14	105	1.29	33	4.5	115	—	—
ABN-CTA36(W)(B)(WB)	8 – 36	5.9 – 26.6	170	3/8" Sq.	1.2	2.6	21.6	547	7	179	1.65	42	4.5	115	—	—
ABN-CTA55(W)(B)(WB)	15 – 55	11.1 – 40.6	90	3/8" Sq.	1.4	3.1	23.1	587	8.61	219	1.65	42	4.5	115	—	—
ABN-CTA90(W)(B)(WB)	25 – 90	18.4 – 66.6	60	1/2" Sq.	2.9	6.4	25.9	658	11.4	290	1.91	49	4.5	115	—	—
ABN-CTA120(W)(B)(WB)	35 – 120	25.8 – 88.5	50	1/2" Sq.	3.1	6.8	28.4	720	13.9	352	2.81	71	4.5	115	—	—
Tubenut																
ABT-CTA15W	3 – 15	2.2 – 11.1	400	1/4" – 7/16" hex	1.2	2.6	22.2	565	7.82	199	4.17	106	4.5	115	0.5	12.7
ABT-CTA20W	5 – 20	3.7 – 14.8	300	3/8" – 5/8" hex.	1.2	2.6	22.9	582	8.39	213	4.74	121	4.5	115	0.56	14

W = WiFi option B = Barcode option Q = Quick Change

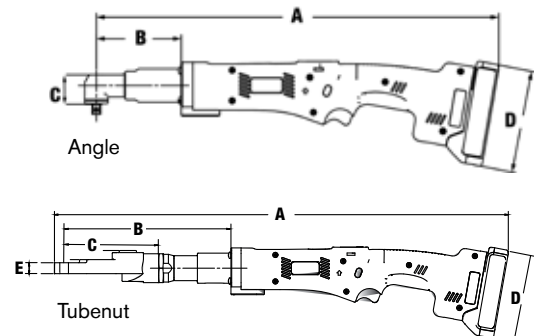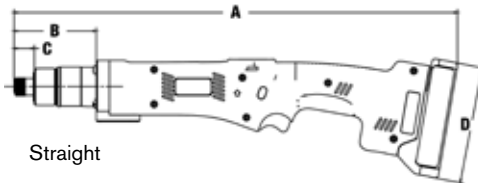

ACRADYNE ULTRA TORQUE ABP CORDLESS NUTRUNNER

Ultra Torque ABP-CTA Series

Unmatched Accuracy for Higher-Torque Applications

FEATURES AND BENEFITS

- Transducerized for precise delivery of torque and angle to the fastener
- Usable stand-alone or with AcraDyne iBC series Controller for line controls and/or data integration with QMS systems
- Sophisticated control set with AcraDyne Tool Manager program with 99 PSETS available
- Operator feedback with OLED screen, audible and tactile feedback
- Wide variety of strategies
 - Torque
 - Angle
 - Torque Plus Turn
 - Torque Minus Turn
 - And more...
- Available with Two-Hand, No Tie Down Button to ensure operator safety from accidental contact with reaction bar
- Standard Offset, Deep Offset, and Flat Reaction Bars available. Custom reaction bars available by request
- Tool supplied with one battery (P/N AB-B1850LI), see page 54 and standard reaction bar. Charger (see page 54) is purchased separately:
 - AB-C18110 (120VAC) Charger or
 - AB-C18220 (220VAC) Charger

AcraDyne® **ULTRA TORQUE**



ABP-CTA950



ABP-CTA1400W



ABP-CTA3000W



ABP-CTA3000WDL
Operator Safety: Dual Trigger Option with Two-Hand, No Tie Down Button prevents accidental contact with reaction bar

MODEL	MAX TORQUE		MAX SPEED RPM	LENGTH		GEARBOX DIAMETER	
	NM	FT-LB		MM	IN	MM	IN
ABP-CTA250(W)	250	185	27	335	13.2	67	2.6
ABP-CTA425(W)	425	315	14	335	13.2	67	2.6
ABP-CTA625(W)	625	460	9.4	335	13.2	67	2.6
ABP-CTA950(W)(DL)	950	700	6.4	335	13.2	67	2.6
ABP-CTA1400(W)(DL)	1400	1000	4	338	13.3	77.5	3.1
ABP-CTA3000(W)(DL)	3000	2200	2.1	374	14.7	77.5	3.1

W = WiFi option DL = Dual Trigger



AB-C18110
Battery Charger



AB-B1850LI Battery

Batteries & Chargers

BATTERIES

- Li-Ion for best energy density
- Deep-discharge protection prevents battery failure
- All AB models utilize the same battery connection and chargers
- Batteries available in 2.5 Ah or 5.5 Ah



AB-B1825LI



AB-B1850LI

BATTERY MODEL #	VOLTAGE	TYPE	CAPACITY	WEIGHT
AB-B1825LI	18V	Li-Ion	2.5 Ah	.8 Lb/.35 kg
AB-B1850LI	18V	Li-Ion	5.0 Ah	1.3 Lb/.6 kg



AB-C18110

BATTERY CHARGERS

- Battery defect detection
- Microprocessor-controlled charging: Charging time is dependent on the capacity of the battery
- Reverse polarity protection
- Automatic battery voltage detection
- Multi-bay charger includes battery adapters
- All AB models use the same batteries and chargers



AB-C18-4W

MODEL	DESCRIPTION	OUTPUT	INPUT	CHARGING TIME	DIMENSIONS (W/O BATTERY)	WEIGHT
AB-C18110	Quick-charge unit for 110V	14.4V - 18V, 3.0A	110VAC, 50-60Hz	Max 55 min for 2.5 Ah battery	3.39" (W) x 4.21" (H) x 6.02" (D) 86 mm (W) x 107 mm (H) x 153 mm (D)	1.2 Lb/.55 kg
AB-C18220	Quick-charge unit for 220V	14.4V - 18V, 3.0A	220-240VAC, 50-60Hz	Max 55 min for 2.5 Ah battery	3.39" (W) x 4.21" (H) x 6.02" (D) 86 mm (W) x 107 mm (H) x 153 mm (D)	1.2 Lb/.55 kg
AB-C18-4W	4-bay charge unit for 100-240VAC	14.4V - 18V, 3.0A	100-240VAC, 50-60Hz	Max 55 min for 2.5 Ah battery	21.2" (W) x 7.2" (H) x 10.2" (D) (incl. feet) 539 mm (W) x 182 mm (H) x 260 mm (D) (incl. feet)	16.8 Lb/7.6 kg



AB-PCOLRING

COLOR INDEX RINGS

Colored rings on AB Series tools make it easy to determine tool torque with a quick glance. Set comes with four colors: blue, yellow, red, and silver.

SUSPENSION BAIL

Bails attach to tool body for perfect balance and secure suspension.



AB-PBAIL

ACRADYNE CORDLESS XT SERIES

Transducerized Cordless Freedom for Your Bolting Applications



AcraDyne's XT Series Cordless Tool is an excellent choice for any application that requires flexibility and uninterrupted operation. These high-efficiency tools feature a brushless motor and provide three selectable tightening strategies: Torque Control, Torque Control with Angle Reporting, and Angle Control with Torque Reporting.

The built-in transducer means precise measurement and traceability. The digital display panel facilitates programming, allows changes in preset values and strategies, and accesses stored information. User interface software, like all AcraDyne products, is available at no cost to the user and has no licensing requirements.



FEATURES AND BENEFITS

- Built-in transducer for measurement and traceability
- Torque overload limit function removes responsibility from the operator
- Ultimate flexibility with three selectable tightening strategies:
 - Torque Control
 - Torque Control with Angle Monitor
 - Torque Control plus Angle
- Temperature-monitoring sensor helps prevent overheating
- High-efficiency brushless motor provides longer motor life and increased efficiency
- Monitor and review reliable data with results stored on tool log and easily extractable through USB
- User-friendly digital adjustment and display of wrench status provides quick operator feedback
- Anti-Windup feature facilitates release from application
- Batteries and charging systems readily available from many sources

ACRADYNE CORDLESS XT SERIES




ABETP Series Tool with Custom AcraDyne Reaction Bar

Many custom reaction devices are available. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.



Digital Display and Control Interface

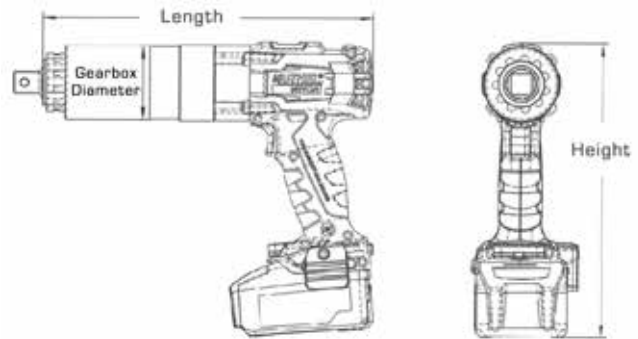

MODEL	TORQUE RANGE		DRIVE SIZE	RPM	LENGTH		HEIGHT		GEARBOX DIA.		WEIGHT		NOISE LEVEL
	NM	FT-LB			MM	IN	MM	IN	MM	IN	KG	LB	
ABETP-350	100 - 350	74 - 258	3/4"	15	206	8.1	267	10.5	68	2.7	2.9	6.4	80
ABETP-500	150 - 500	110 - 370	3/4"	10	206	8.1	267	10.5	68	2.7	2.9	6.4	80
ABETP-800	230 - 800	170 - 590	3/4"	6	253	10	267	10.5	68	2.7	3.3	7.3	80
ABETP-1400	300 - 1,400	220 - 1,030	3/4"	6	253	10	267	10.5	68	2.7	3.3	7.3	80
ABETP-1700	550 - 1,700	405 - 1,250	1"	4	328	12.9	267	10.5	78	3.1	5.3	11.7	80
ABETP-2800	700 - 2,800	515 - 2,065	1"	3.5	316	12.4	267	10.5	78	3.1	5.8	12.8	80
ABETP-3100	900 - 3,100	664 - 2,285	1"	2.5	316	12.4	267	10.5	78	3.1	5.8	12.8	80
ABETP-4000	810 - 4,000	595 - 2,950	1"	2	312	12.3	267	10.5	82	3.2	6.1	13.4	80
ABETP-4500	1200 - 4,450	885 - 3,282	1"	2	370	14.6	267	10.5	86	3.4	8.1	17.9	80

LI-ION HD BATTERY AND CHARGER



- 5.5 Ah 18V Li-Ion battery
- LiHD battery provides ultimate performance and extremely long use with minimal temperature variation
- Air cooled charging technology: Battery pack cools during charging, significantly reducing charging times
- Processor-controlled charge and discharge management
- Battery can be stored with almost no self-discharge



MULTIPLE NUTRUNNING SYSTEMS

AIMCO can integrate the AcraDyne tool spindle into a customized Multiple Nutrunning system. From simple systems vertically suspended above the part, to assembly stations that integrate with your line, AIMCO can effectively accommodate your project.

LET US KNOW YOUR REQUIREMENTS AND WE WILL PROPOSE A SOLUTION TAILORED TO YOUR NEEDS.



FEATURES AND BENEFITS

- Nutrunner sequencing - Allows nutrunners to be sequenced at each phase of the tightening process, providing even distribution of torque and load to each fastener. This prevents part damage and distortion
- Snug threshold, final torque in one pass - No need for multiple torque stage sequencing. Fixtured nutrunners save time and effort
- No missed fasteners - Multiple nutrunners have a spindle dedicated to each location, ensuring quality on every rundown on every bolt
- Better residual torques - Synchronized controlled fastening allows residual torque levels to be consistent with the dynamic torque specification
- Saving in cycle time - Compared to using a single nutrunner tool with many rundowns, running all fasteners simultaneously reduces in-station cycle time
- Cost saving benefits - Saving installation cycle time frees operators to handle additional tasks and potentially reduce labor costs
- Collect data — Most common methods of collecting data for quality control and statistical analysis can be implemented from a serial data string using RS232 to formatted data from a network database

INDUSTRY APPLICATIONS

- Harvester chain-pull assembly, 2-spindle
- Engine flywheel assembly, 3-spindle
- Wheel lug nut assembly, 4-spindle
- Axle u-bolt assembly, 4-spindle
- Gasoline generator assembly, 6-spindle
- Lawn mower motor assembly, 7-spindle
- Air-cooled small vehicle engine assembly, 10-spindle

TOOL SPECIALS



AIMCO can provide customized tooling solutions for even the most unique applications. Let us propose a solution tailored to your needs. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.




URYU CONTROLLED PNEUMATIC PULSE TOOLS

Uryu Controlled Pulse Tools Offer Ergonomic Solutions for Precise Quality Control and High Productivity

MAGNETOSTRICTIVE TRANSDUCER

Uryu's unique feature, a brushless Magnetostrictive Transducer, provides real time monitoring of torque delivered to the fastener that is then used by the tool controller in managing the delivery of torque.

The Magnetostrictive Torque Transducer is a non-contact system consisting of the tool anvil surrounded by a pair of sensor coils providing accuracy and durability in a tightening process. This system is accurate and robust in detecting dynamic torque application while fastening.

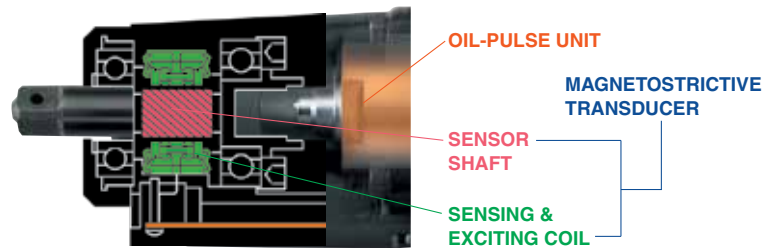


When torque is applied to the tool anvil, tensile stress is detected by the coils as changes in the magnetic field. These magnetic field changes are analyzed and converted to torque signals that a controller uses to shut off the tool.

AUTO RELIEF TECHNOLOGY

URYU's patented Auto Relief Technology ensures smooth delivery of torque during pulse tool operation.

A relief valve within the pulse unit manages the pressurization of the pulse unit fluid in a proportional manner. This modulation begins the application of torque energy to the fastener in a more controlled manner than has ever before been possible. A benefit of this technology is the elimination of an initial torque spike generated by the inertial mass of the pulse unit which, prior to bolt seating, is influenced by the inertia of the spinning mass.

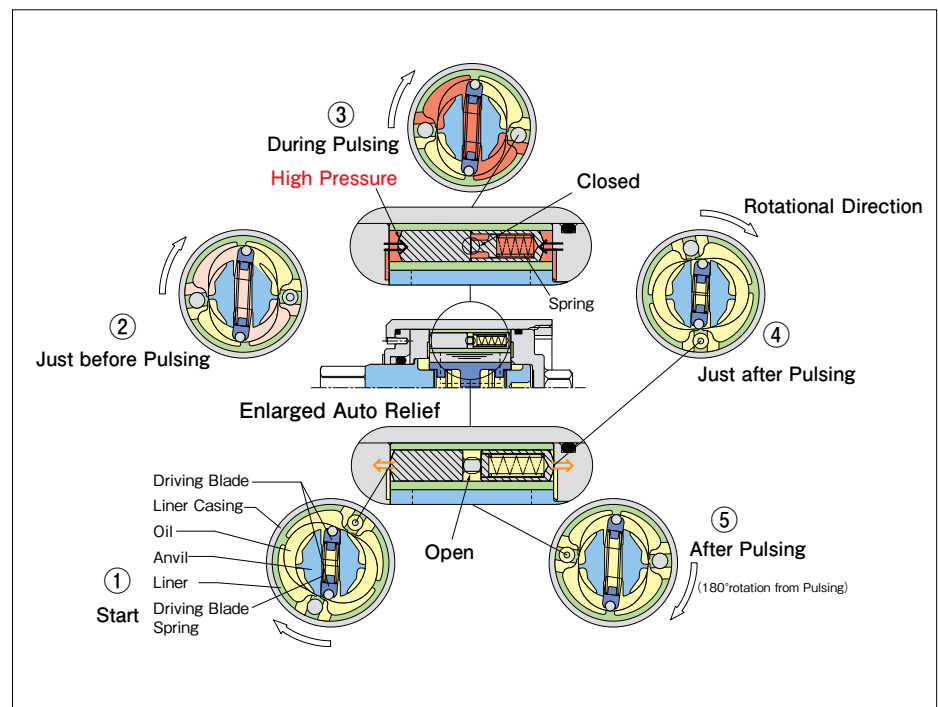

Uryu's Auto Relief system dynamically responds to the joint condition resulting in more pulses, shorter in duration to meet the target torque. This leads to more accurate fastening over a wide variety of application demands.

URYU CONTROLLED PNEUMATIC PULSE TOOLS

UA-MC PNEUMATIC PULSE SERIES €



FEATURES AND BENEFITS

- Auto Relief Technology provides additional torque control during pulsing events
- External solenoid valve increases power-to-weight ratio by 20%
- Magnetostrictive Transducer provides durability with low size and weight
- All models work with any UEC Series controller and can connect to a wide range of network protocols when used with an AcraDyne iAC series controller
- With torque reaction virtually non-existent, allowing for one-handed operation, the UA-MC provides significantly increased ergonomics

CONTROLLER OPTIONS

 URYU UEC-4800, UEC-4800A, UEC-4800TP, UEC-4800TPA Controllers (see page 66)	 URYU UEC-5500 Controller for multiple spindles (see page 67)	 Gen IV iAC Controller for transducerized Uryu air tools (see page 11)
--	---	--

Recommended air pressure: 85 PSI

MODEL	TORQUE RANGE		FREE SPEED RPM	LENGTH		WEIGHT		DRIVE SIZE IN	AIR USAGE CFM
	NM	FT-LB		MM	IN	LB	KG		
PISTOL TYPE									
UA-40MC	6.8 - 12.0	5.0 - 8.8	3,600	170	6.7	2.4	1.1	3/8	7.0
UA-40DMC	6.9 - 12.0	5.0 - 8.8	3,600	170	6.7	2.4	1.1	1/4 QC	7.0
UA-50MC	16.6 - 29.0	12.2 - 21.4	4,250	170	6.7	2.4	1.1	3/8	8.8
UA-50DMC	16.6 - 29.0	12.2 - 21.4	4,250	170	6.7	2.4	1.1	1/4	8.8
UA-60MC	25.1 - 44.0	18.5 - 32.5	5,000	175	6.9	2.5	1.1	3/8	14.0
UA-70MC	28.5 - 50.0	21.0 - 37.0	5,700	187	7.4	2.7	1.2	3/8	15.8
UA-80MC	40.0 - 60.0	29.6 - 44.4	6,000	195	7.7	3.4	1.6	3/8	16.8
UA-90MC	45.7 - 80.0	33.8 - 59.2	5,500	203	8.0	3.7	1.7	1/2	18.6
UA-100MC	51.4 - 90.0	38.0 - 66.6	5,200	215	8.5	4.5	2.1	1/2	19.3
UA-130MC	74.2 - 130.0	54.9 - 96.2	4,500	233	9.2	6.2	2.8	1/2	25.6
UA-150MC	150 - 220	111 - 163	4,350	251	9.9	8.8	4.0	3/4	24.7
STRAIGHT TYPE									
UA-40SMC	7.0 - 13.0	5.2 - 9.6	3,600	246	9.7	2.7	1.2	3/8	7.0
UA-40SDMC	5.0 - 12.0	3.7 - 8.9	3,600	246	9.7	2.7	1.2	1/4	7.0
UA-50SMC	11.0 - 25.0	8.1 - 18.5	4,250	246	9.7	2.7	1.2	3/8	8.8
UA-50SDMC	9.0 - 23.0	6.7 - 17.0	4,250	246	9.7	2.7	1.2	1/4	8.8
UA-60SMC	18.0 - 38.0	13.3 - 28.1	5,000	252	10.0	2.9	1.3	3/8	14.0
UA-60SDMC	16.0 - 34.0	11.8 - 25.2	5,000	252	10.0	2.9	1.3	1/8	14.0
UA-70SMC	30.0 - 50.0	22.2 - 37.0	5,700	265	10.4	3.1	1.4	3/8	15.8

Air Inlet: 1/4" N.P.T.

Recommended Air Hose Size: 1/4" I.D. for UA-40MC - UA-50MC

3/8" I.D. for UA-60MC - UA-100MC

1/2" I.D. for UA-130MC - UA-150MC

* € logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

URYU CONTROLLED PNEUMATIC PULSE TOOLS

UA-AMC PNEUMATIC PULSE SERIES €



UA-500AMC



UA-1300AMC

FEATURES AND BENEFITS

- The UA-AMC features angle measurement for improved process control
- Virtually no torque reaction
- Detects cross threading, double hits on the same fastener, stripped and damaged fastener threads, and incorrect fasteners in an application
- Transducer integrated resolver
- Patented Auto Relief Technology provides smooth torque delivery during pulsing events
- Triple chamber air motors for high power output in UA-400AMC, UA-500AMC, and UA-600AMC models

CONTROLLER OPTIONS



URYU UEC-4800,
UEC-4800A, UEC-4800TP,
UEC-4800TPA Controllers
(see page 66)



URYU UEC-5500
Controller for multiple
spindles (see page 67)



Gen IV iAC Controller for
transducerized Uryu air tools
(see page 11)

Recommended air pressure: 85 PSI

MODEL	TORQUE RANGE		FREE SPEED RPM	LENGTH		WEIGHT		DRIVE SIZE	AIR USAGE CFM
	NM	FT-LB		MM	IN	LB	KG		
UA-400AMC	7 - 13	5.2 - 9.6	3,600	193.0	7.6	3.0	1.4	3/8	7.0
UA-500AMC	11 - 25	8.1 - 18.4	4,250	193.0	7.6	3.0	1.4	3/8	8.8
UA-600AMC	18 - 38	13.3 - 28.0	5,000	198.5	7.8	3.1	1.4	3/8	14.0
UA-700AMC	30 - 50	22.1 - 36.9	5,700	207.5	8.2	3.3	1.5	3/8	15.8
UA-800AMC	40 - 60	29.5 - 44.3	5,300	215.5	8.5	3.7	1.7	3/8	16.8
UA-900AMC	40 - 80	29.5 - 59.0	5,500	227.5	9.0	4.7	2.2	1/2	18.6
UA-1000AMC	50 - 90	36.9 - 66.4	5,200	235.0	9.3	5.4	2.5	1/2	19.3
UA-1300AMC	85 - 130	62.7 - 95.9	4,500	256.5	10.1	7.2	3.3	1/2	25.6

Air Inlet: 1/4" N.P.T.

Recommended Air Hose Size: 1/4" I.D. for UA-400AMC - UA-500AMC

3/8" I.D. for UA-600AMC - UA-1000AMC

1/2" I.D. for UA-1300AMC

* € logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

URYU CONTROLLED PNEUMATIC PULSE & ELECTRIC OIL PULSE TOOLS

ACRA-PULSE MC PNEUMATIC PULSE SERIES €



UXR-1820MC



UXR-2400SMC

FEATURES AND BENEFITS

- Electronically controlled built-in shut-off valve stops tool as soon as target torque is reached
- LED indicator shows Good or No Good after each tightening

CONTROLLER OPTIONS



URYU UEC-4800, UEC-4800A, UEC-4800TP, UEC-4800TPA Controllers (see page 66)



URYU UEC-5500 Controller for multiple spindles (see page 67)



Gen IV iAC Controller for transducerized Uryu air tools (see page 11))

Recommended air pressure: 85 PSI

MODEL	TORQUE RANGE		FREE SPEED	LENGTH		WEIGHT		DRIVE	NOISE LEVEL	AIR USAGE
	NM	FT-LB	RPM	MM	IN	LB	KG	IN	dB(A)	CFM
PISTOL										
UXR-1820MC	160 - 250	117.8 - 183.7	4,600	322	12.7	12.3	5.5	3/4 SQ.	84	24.7
UXR-2000MC	250 - 400	184.4 - 295.1	4,600	355	14	17.6	8.0	3/4 SQ.	85	33.6
INLINE										
UXR-2400SMC	350 - 600	258.2 - 442.7	3,300	457	18.0	27.6	12.5	1.0 SQ.	85	35.3

* External Solenoid Valve (909-749-0) Required

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

N.P.T. 3/8" for UXR-1820MC

N.P.T. 1/2" for UXR-2400SMC

UDP-MC TRANSDUCERIZED ELECTRIC PULSE SERIES €

FEATURES AND BENEFITS

- High speed for increased productivity
- Virtually no torque reaction
- Magnetostrictive Transducer provides durability with low size and weight
- Auto relief pulse mechanism for measured application of tightening energy
- Automatic Ventilation System: Cooling fan is activated automatically when pulling the throttle trigger, which reduces heat and increases duty cycle

CONTROLLER OPTIONS



URYU UECP-4810 controller with integrated tool driver (see page 68)



Gen IV IPC Controller for transducerized Uryu DC pulse (see page 12)



UDP-A600LMC



UDP-A700MC



UDP-A100MC
UDP-A120MC

MODEL	TYPE	TORQUE RANGE		FREE SPEED	WEIGHT	LENGTH	DRIVE	SOUND LEVEL	CABLE ASSEMBLY
		NM	FT-LB	RPM	LB	IN	IN	dB(A)	CONNECTS TOOL TO CONTROLLER
UDP-A600LMC	Transducerized	4 - 20	3 - 14.8	4,800	3.4	8.4	3/8 SQ.	74	910-807-0 (5 meter)
UDP-A700MC	Transducerized	10 - 50	7.4 - 37	4,800	3.9	9.5	3/8 SQ.	76	910-808-0 (10 meter)
UDP-A100MC	Transducerized	45 - 100	33.3 - 74	4,800	6.3	9.8	1/2 SQ.	76	910-809-0 (15 meter)
UDP-A120MC	Transducerized	55 - 120	40.5 - 88.4	4,800	6.3	9.8	1/2 SQ.	78	910-810-0 (20 meter)
									910-567-0 (5 meter)
									910-568-0 (10 meter)
									910-569-0 (15 meter)
									910-625-0 (20 meter)

* € logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

REVOLUTIONARY

Quantum Leap Forward in Hydraulic Pulse Technology
Coupled with a **PRECISE** Transducerized Battery Tool



*Innovative Phoenix Pulse Unit with more efficient blades and elimination of springs **Lengthens Service Intervals** by as much as **400%** with a high degree of accuracy and a reaction-free operating experience*

Powerful &
Intuitive Data
Connectivity
with Tool
Controllers

Increased
Power
per Pulse

Extremely
Accurate
Torque Control &
Angle
Monitoring

Improved
Operator Comfort
with near
Reaction-Free
feel

Fluid Cost
Reduced
by as much
as 40%

CONTROLLER OPTIONS



URYU UCC-100Z controller
with integrated tool driver (see
page 69)



AeraDyne iBC-Z
Gen IV iBC-Z Controller for
transducerized UBX-AF series
(see page 12)

URYU CONTROLLED BATTERY PULSE TOOLS

UBX-AFZ Series Shut-Off Battery Oil Pulse Tool

The new UBX-AFZ series of Shut-Off Battery Oil Pulse Tools features Phoenix Pulse Tool technology design (patent pending) that houses fewer internal parts, lengthening fluid life and simplifying maintenance procedures.

Enjoy clear & concise data connectivity when integrated with tool controllers.


Additional Features and Benefits

- Weight reduced by 0.3 lb (140 g) compared to the UDBP-TA70(P)
- On-board LED indicates fastening results
- Short duration, non-mechanical pulsing delivers torque to the fastener with near reaction-free feel
- Number of fastenings per minute (on average):
 - UBX-AF500Z: 11 (fastening time 0.5 sec.)
 - UBX-AF600Z: 10 (fastening time 0.5 sec.)
 - UBX-AF700Z: 9 (fastening time 0.5 sec.)
- Fastener quantity per full charge (on a B joint with 1 sec or less freerun):
 - UBX-AF500Z: 440
 - UBX-AF600Z & UBX-AF700Z: 320
- Elliptical movement within pulse unit produces more power per pulse
- High pulse frequency and crisp tool shut off results in accurate delivery of torque
- Cycle times on most joints are reduced for more efficient production
- Fluid costs reduced by as much as 40% (when using OEM recommended fluid)

UBX-AF600Z

UBX-AF500Z

UBX-AF700Z

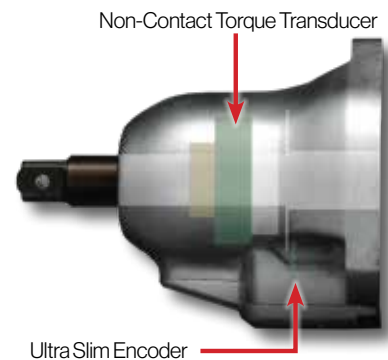

MODEL*	NOMINAL BOLT SIZE		TORQUE**		WEIGHT W/O BATTERY		FREE SPEED RPM	LENGTH		HEIGHT		SQ. DRIVE IN
	MM	IN	NM	FT-LB	KG	LB		MM	IN	MM	IN	
UBX-AF500Z	6 - 8	1/4 - 5/16	5 - 20	3.7 - 14.8	1.52	3.35	3,600	219	8.7	255	10.1	3/8
UBX-AF600Z	8 - 10	5/16 - 3/8	15 - 40	11.1 - 29.5	1.52	3.35	4,800	219	8.7	255	10.1	3/8
UBX-AF700Z	8 - 12	5/16 - 1/2	25 - 60	18.4 - 44.3	1.56	3.44	4,800	219	8.7	255	10.1	3/8

* Base model comes with no battery. Batteries are available separately or in tool/kit combinations.

Add "B" to end of the model number to order 1 tool with 1 battery. Add "KIT" to the end of the model number to order a tool kit, which includes 1 tool, 2 batteries, and 1 battery charger.

** Torque range varies depending on the battery size in use.

BATTERIES AND BATTERY CHARGER

BATTERY MODEL #*	DESCRIPTION	VOLTAGE	TYPE	CAPACITY
EYFB32	Battery for UBX-AF500Z	10.8	Li-Ion	2.0Ah
EYFB41	Battery for UBX-AF600Z & UBX-AF700Z	14.4V	Li-Ion	2.0Ah

* 4.0Ah battery also available, Part #EYFB42B

CHARGER MODEL #	DESCRIPTION	WEIGHT	INPUT VOLTAGE	DIMENSIONS	BATTERY CAPACITY
EYOL82B	Li-Ion battery charger	0.93 kg (2.0 lbs)	120VAC	9.3" D x 7.1" W x 3.6" H	3.0 - 4.2Ah



EYFB32



EYFB41



Battery Charger:
EYOL82B

URYU CONTROLLERS

STATE-OF-THE-ART CONTROLLERS FOR PULSE TOOLS

URYU UEC Controllers are available in several models, depending on the tool used and desired features:

- **UEC-4800 base model:** Compatible with UA-MC/SMC, and UXR-MC/SMC series.
 - **UEC-4800A:** Base model with angle monitoring
 - **UEC-4800TP:** Base model with touch panel
 - **UEC-4800TPA:** Base model with touch panel and angle monitoring. Compatible with UA-AMC series tools
- **UEC-5500:** Multi-spindle capability, compatible with UA-MC/SMC and UXR-MC/SMC tools
- **UECP-4810:** Integrates UEC-4800 and Tool Driver. Compatible with UDP-MC tools only. Programmable from front panel or PC – no separate touchpad module or cable required
- **UCC-100Z:** Compatible with UBX-AF battery pulse series only



URYU UEC CONTROLLERS

							
	UEC-4800	UEC-4800A	UEC-4800TP	UEC-4800TPA	UEC-5500	UECP-4810	UCC-100Z
	Single-Spindle Control	Single-Spindle Control with Angle Monitoring	Single-Spindle Control with Touch Screen	Single-Spindle Control with Touch Screen and Angle Monitoring	Multi-Spindle Control	Integrated UEC-4800 Controller and Tool Driver for UDP Series Tools	Built-in Wireless unit for UBX-AF Series Tools

TOOL SERIES

UA-MC/SMC Series: Pneumatic Pulse Tools 	X	X	X		X		
UA-AMC Series: Pneumatic Pulse Tool 				X	X (with angle encoder board)		
UXR-MC/SMC Series: Pneumatic Pulse Tool 	X	X	X	X	X		
UDP-MC Series: Electric Oil-Pulse Tool 						X	
UBX-AF Series: Battery Pulse Tool 							X

URYU CONTROLLERS

UEC-4800 CONTROLLER



UEC-4800
UEC-4800A



UEC-4800TP
UEC-4800TPA

USE UEC-4800 & UEC-4800TP
WITH THE FOLLOWING TOOLS



UA-MC
Series



UA-SMC
Series



UXR-SMC
Series



UXR-MC Series

USE UEC-4800TPA WITH THE FOLLOWING TOOLS



UA-AMC
Series

UEC-4800 BASE MODEL

FEATURES AND BENEFITS

- Low-cost LCD front panel
- 12,000 data point memory
- On-screen statistical readout. Statistical data can be graphed when connected to a PC. PC Windows-base software included.
- 16 parameter sets available
- Programmable I/O options
- Built-in Ethernet connectivity
- Can be used with Oil-Pulse Tools fitted with a Magnetostrictive Transducer: UA-MC/SMC series and UXR-MC/SMC Series
- Tracks cumulative fastening numbers and pulse numbers from the start of operation
- Highly reliable torque control and monitor
- MiniSD card slot on back panel allows you to save and read fastening and torque wave data

UEC-4800A

All UEC-4800 base model features plus angle monitoring capabilities.

UEC-4800TP


All UEC-4800 base model features, but has a touch panel.

- Torque Wave data visible on both front touch panel and PC
- Front panel, PC display, or buzzer indicate Input/Output (terminal blocks and tool wiring), checks and errors

UEC-4800TPA

Includes all of the features of the UEC-4800 base model and the UEC-4800TP model, plus angle monitoring capability.

UEC-4800(A)(TP)(TPA) System Layout

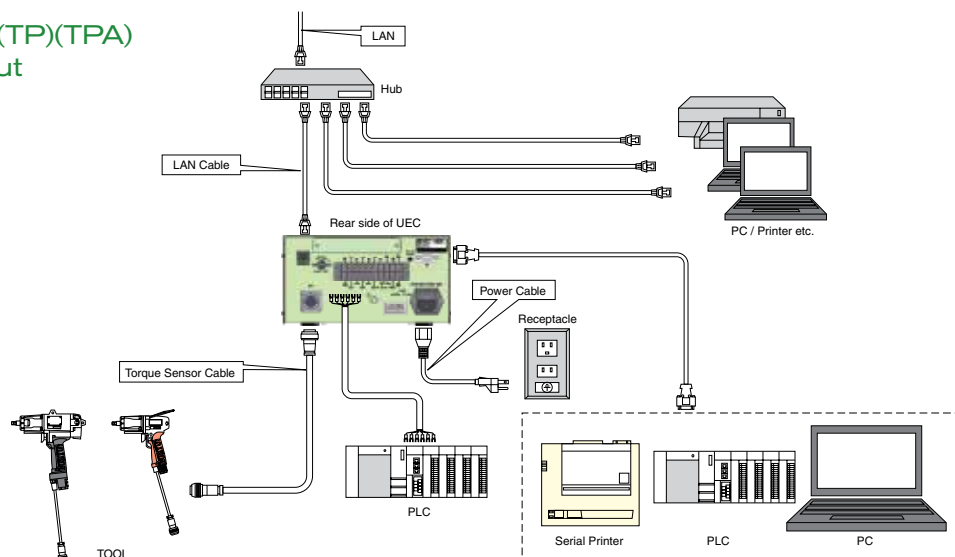

URYU CONTROLLERS

UEC-5500 CONTROLLER



UEC-5500


FEATURES AND BENEFITS

Multi-spindle controller that includes all of the features of the UEC-4800 base model, plus it can control 4 spindles simultaneously.

- Easy programming with removable key pad
- 20,000 data point memory per spindle



UEC-5500 System Layout

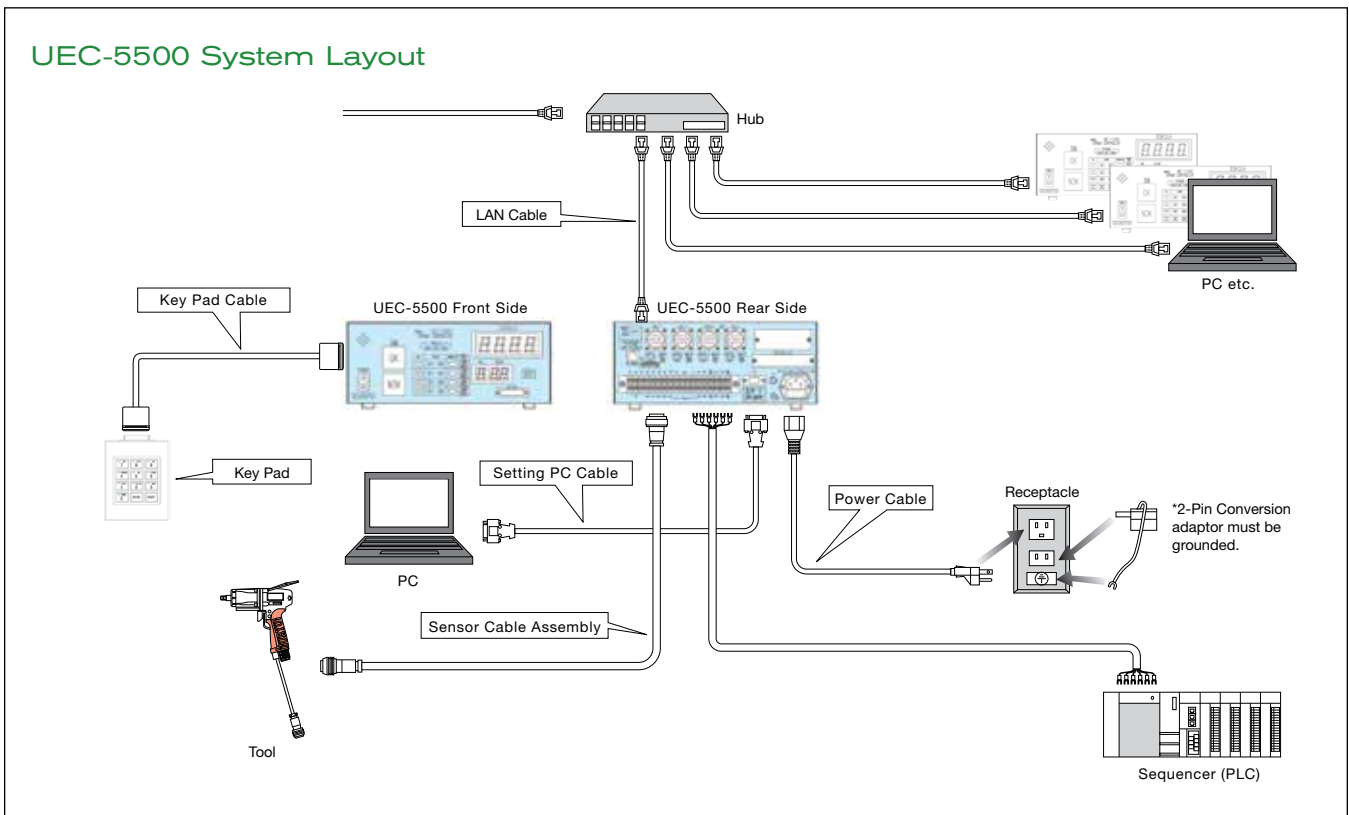

UECP-4810 CONTROLLER



UECP-4810A

USE UECP-4810 WITH THE FOLLOWING TOOLS




UDP-MC Series

UECP-4810

FEATURES AND BENEFITS

- Used exclusively for UDP series tools
- Integrates Tool Driver and UEC-4800 Controller – no separate box
- Windows-based PC software included
- Programmable tool speeds
- Motor setting:
 - Motor current can be set in four steps
 - Motor rotational speed can be set in 100 rpm increments
- Fastening error detection and fastener number countdown functions ensure seamless operation
- Allows setup or changeover of fastening torque and fastening number count
- Tool's maintenance is possible by counting both total cycle numbers (how many fasteners) and/or total pulse numbers.
- Input/Output check and error messages can be checked from your PC or the front panel, which will notify you with a buzzer
- Set up and monitor various control values. Values can be set either on the front panel or on the PC
- Ethernet (TCP/IP) capable. Upload and receive setting values. Upload fastening result/waveform data through PC software

UECP-4810(A) System Layout

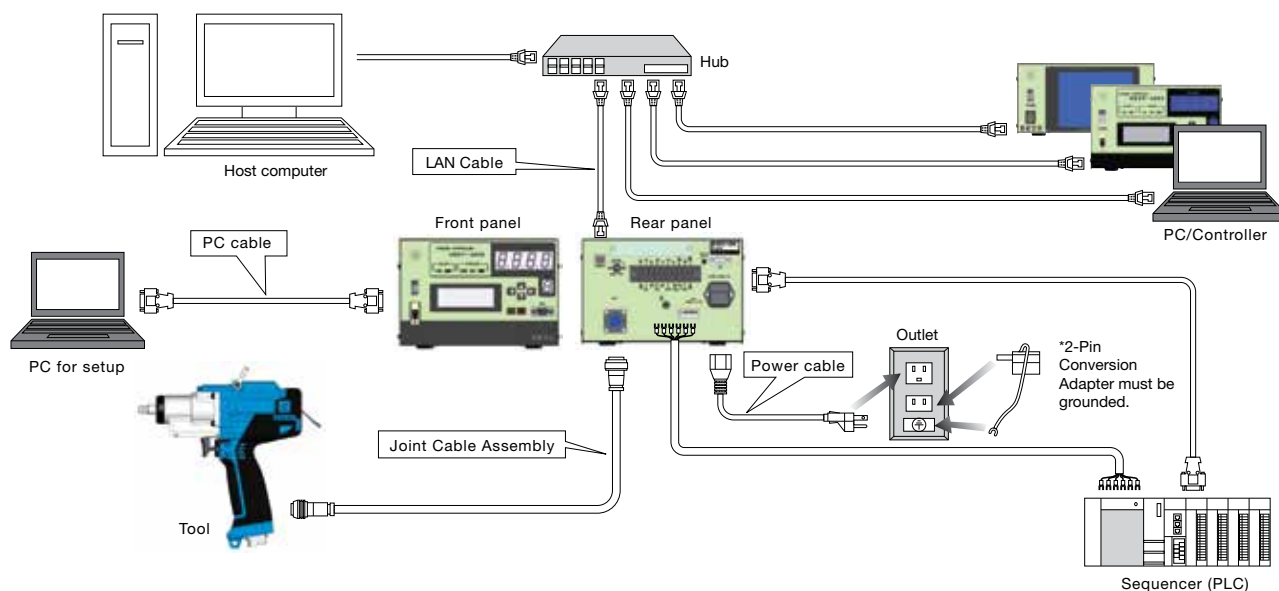

URYU CONTROLLERS

UCC-100Z CONTROLLER




UCC-100Z

FEATURES AND BENEFITS

- Used exclusively for UBX-AF series tools
- Windows-based PC software included
- Programmable tool speeds
- Set up and monitor various control values. Values can be set either on the front panel or on the PC
- Pairing parameter is selectable from 3 types:
 - Manual pairing by dip switches
 - Pairing through software
 - Wireless pairing
- Two UBX-AF tools can be paired to one UCC-100Z controller
- Input/Output check and error messages can be checked from your PC or the front panel, which will notify you with a buzzer

UCC-100Z System Layout

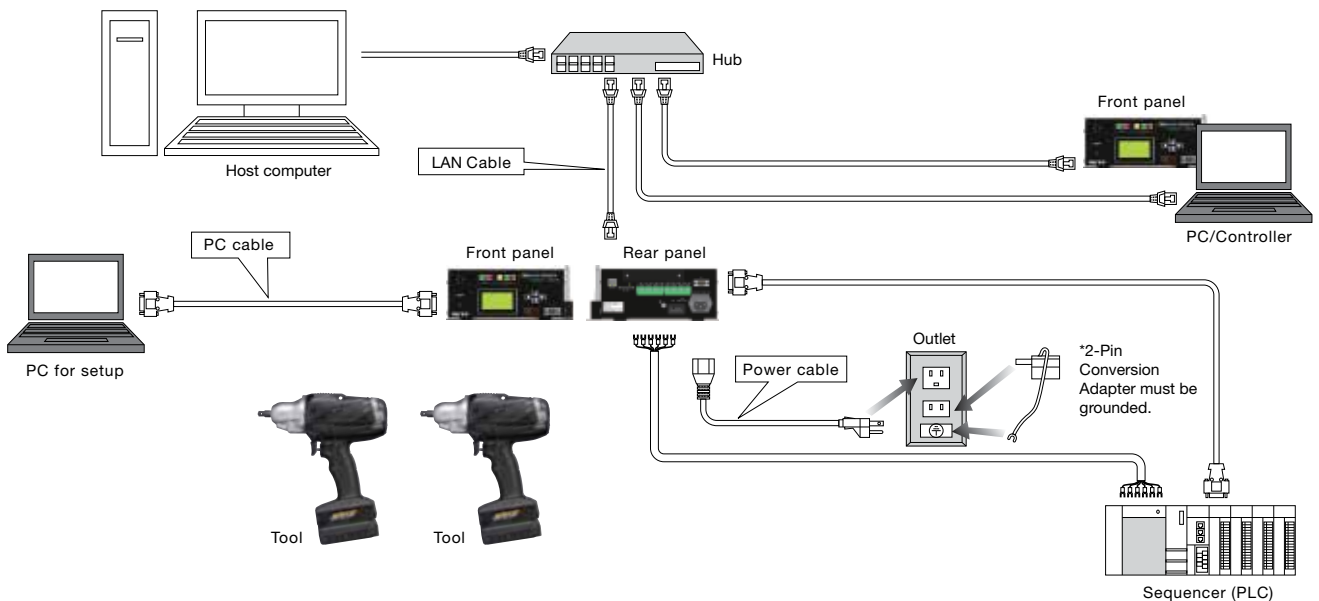

URYU CONTROLLERS

URYU CONTROLLER SPECIFICATIONS

MODEL	24V I/O	URYU DATA, BARCODE, & PRINTER	LIGHT TOWER & BYPASS SWITCH CAPABLE	ETHERNET PROTOCOLS	SERIAL PROTOCOLS & BAR CODE	ANYBUS DEVICENET	ANYBUS PROFIBUS	TOUCH PANEL DISPLAY	ANGLE MONITORING
UEC Controller for UA-AMC/SMC, UA-MC, and UXR-MC/SMC Series									
UEC-4800	X	X							
UEC-4800A-ANGLE	X	X							X
UEC-4800TP	X	X						X	
UEC-4800TPA	X	X						X	X
UEC-4800-EX	X			X	X				
UEC-4800-EXL	X		X	X	X				
UEC-4800-EDA	X			X		X			
UEC-4800-EPA	X			X			X		
UEC-4800-EPAL	X		X	X			X		
UEC-4800A-EXL	X		X	X	X				X
UEC-4800A-EDA	X			X		X			X
UEC-4800A-EDAL	X		X	X		X			X
UEC-4800A-EPA	X			X			X		X
UEC-4800A-EPAL	X		X	X			X		X
UEC-4800A-EPL			X	X			X		X
UEC-4800TP-EX	X			X	X			X	
UEC-4800TP-EXL	X		X	X	X			X	
UEC-4800TP-EDA	X			X		X		X	
UEC-4800TP-EDAL	X		X	X		X		X	
UEC-4800TP-EPA	X			X			X	X	
UEC-4800TP-EPAL	X		X	X			X	X	
UEC-4800TPA-EX	X			X	X			X	X
UEC-4800TPA-EXL	X		X	X	X			X	X
UEC-4800TPA-EDA	X			X		X		X	X
UEC-4800TPA-EDAL	X		X	X		X		X	X
UEC-4800TPA-EPA	X			X			X	X	X
UEC-4800TPA-EPAL	X		X	X			X	X	X
UEC-5500 (Multi Spindle)	X	X							
UECP Controller with Tool Driver for UDP Series Tools									
UECP-4810A	X	X							
UCC Controller for UBX-AF Series Tools									
UCC-100ZA	X	X		X				X	X

URYU CONTROLLERS

URYU CONTROLLER SPECIFICATIONS

	UEC-4800(A)(TP)(TPA)	UEC-5500	UECP-4810(A)	UCC-100Z
Power Supply	AC100 ~ 240V $\pm 10\%$			
Power Frequency	50/60 Hz			
Insulation Protection	DC500V over 10M Ω			
Power Consumption	Approx. 30VA	Approx. 50VA	Approx. 30VA	Approx. 35VA
Weight	Approx. 3.6 kg		Approx. 11.30 kg	Approx. 2.9 kg
Dimensions	265(d) x 222(w) x 120(h)	240(d) x 270(w) x 115(h)	265(d) x 222(w) x 200(h)	254(d) x 233.5(w) x 106(h) (with antenna)
Main Functions	Torque Monitoring/Control + Fastening Counter			Torque Control + Angle Monitoring + Fastening Counter
Parameter Setup	- PC (with setup software) - UEC-4800/4800A: Manual Input on Front LCD Panel - UEC-4800TP/TPA: Manual Input on Front Touch Panel	- PC (with setup software) - Removable key pad	- PC (with setup software) - Manual Input on front LCD Panel	
Display	Torque Resolution ± 2048 (12-Bit A/D) <u>UEC-4800/4800A</u> - LCD: 20 characters x 4 lines - Contents: Work No., Fastening Countdown No., Fastening Time, Pulse No. 1-digit digital display (DPM): Work No. 4-digit digital display (DPM): Torque <u>UEC-4800TP/TPA</u> 320 x 240 dot, 25 characters x 15 lines	Torque Resolution ± 2048 (12-Bit A/D) 4-digit digital display: Torque 2-digit digital display: Fastening Countdown 1-digit digital display (small) x 4: Work No. 1-digit digital display (large): x 4: Spindle No.	Torque Resolution ± 2048 (12-Bit A/D) - LCD: 20 characters x 4 lines - Contents: Work No., Bolt Count No., Tightening Time, Pulse Blow Number 1-digit digital display (DPM): Work No. displayed 4-digit digital display (DPM): Torque reading displayed	Torque Resolution ± 2048 (12Bit A/D) - LCD: 20 Characters x 8 lines - Contents: Work No., Fastening Countdown, Fastening Time, Pulse No., Angle, Error message
LED	COUNT Lamp: OK (Green), NOK (Red) TORQUE Lamp: LOW (Yellow), OK (Green), HIGH (Red)			FASTENING Lamp: LOW (Yellow), OK (Green), HIGH (Red)
Input Terminal Signal	Operation Voltage/Current: DC24V/ approx. 10mA 6 terminals (free format), VALVE	Drive by Electric Current Input (photo coupler insulation) Voltage: DC24V Insulation Resistance: 4.7K Ω 12 terminals (free format), VALVE, +24V	Operation Voltage/Current: DC24V, approx. 10mA 6 terminals (programmable). Note: Contact input necessary	
Output Terminal Signal	Contact Capacity: AC:125V, 0.3A, DC:30V, 1A 6 terminals (free format), VALVE	Contact Capacity: AC:125V, 0.3A, DC:30V, 1A 8 terminals (free format), VALVE, +24	Contact Capacity: DC 30V, 1A 6 terminals (programmable), VALVE	Contact Capacity: DC30V, 1A 6 Terminals (free format)



URYU CONTROLLED PULSE TOOL CABLES / CONTROLLER BRACKETS



910-623-0



EC/MCCBL-25



910-518-0



911-023-0

CONTROLLED PULSE TOOL CABLES

PART #	DESCRIPTION	FUNCTION	LENGTH M FT		TOOL SERIES				CONTROLLER PLATFORM	
					UA-MC	UA-AMC	UDP-MC	UXR-MC	UEC-4800	UECP-4810
909-921-0	Sensor Cable Assy.	Tool Cable to Controller	5	18	X	X		X	X	
910-517-0	Joint Cable Assy.	Tool Cable to Controller	5	18			X			X
910-518-0	Joint Cable Assy.	Tool Cable to Controller	10	35			X			X
910-546-0	Joint Cable Assy.	Tool Cable to Controller	3	10						
910-547-0	Joint Cable Assy.	Tool Cable to Controller	5	18						
910-548-0	Joint Cable Assy.	Tool Cable to Controller	10	35						
EC/MCCBL-3	Sensor Cable Assy.	Tool Cable to Controller	1	3	X	X		X	X	
EC/MCCBL-10	Sensor Cable Assy.	Tool Cable to Controller	3	10	X	X		X	X	
EC/MCCBL-25	Sensor Cable Assy.	Tool Cable to Controller	7	25	X	X		X	X	
EC/MCCBL-30	Sensor Cable Assy.	Tool Cable to Controller	9	30	X	X		X	X	
EC/MCCBL-35	Sensor Cable Assy.	Tool Cable to Controller	10	35	X	X		X	X	
EC/MCCBL-40	Sensor Cable Assy.	Tool Cable to Controller	12	40	X	X		X	X	
EC/MCCBL-45	Sensor Cable Assy.	Tool Cable to Controller	13	45	X	X		X	X	
EC/MCCBL-50	Sensor Cable Assy.	Tool Cable to Controller	15	50	X	X		X	X	
EC/MCCBL-60	Sensor Cable Assy.	Tool Cable to Controller	18	60	X	X		X	X	
EC/MCCBL-75	Sensor Cable Assy.	Tool Cable to Controller	22	75	X	X		X	X	
911-023-0	Encoder "Y" Cable	Enables Angle Sensor. Splits Tool Cable to Controller	0.3	1		X			X*	
910-623-0	Sensor Cable Assy.	External Driver Box to Controller	0.3	1					X	

* Requires Controller with Angle Encoder Board installed

UEC-4800 CONTROLLER BRACKET KIT



UEC-4800TRAY provides a stable platform for the UEC-4800 Controller.

- Flexible mounting configurations for easy access and viewing
- Provides compact storage of light tower and accessories with controller
- Durable, Powder Coat finish

TOOL HOLDERS

Rubber tool holders protect tool's torque sensor when not in use.



MODEL	USED FOR
852-644-1 KIT	ULT / UAT / UL 30 - 70 series
	UX 450 - 500 series
	UD-50 / UD-60 series
852-669-1 KIT	ULT / UAT / UL / UA-MC / UX / UX-T 612 - 800 series
	UW-6 / UW-ST6 series
852-645-1 KIT	UL T/ UAT / UL / UA-MC 90 - 130 series
	UDBP-TA 70 series
	UX-T 700 series
	UW-8 / UW-9 series

TOOL HOLDER FOR SMALLER TOOLS

The Mini Tool Holder allows operators a safe and stable way to store tools.

- Easily adapt to the worker's position, creating an ergonomic workspace and reducing project setup time
- Durable construction with inner steel reinforcement
- Does not damage plastic power tool bodies
- Holds tools with maximum diameter of 42 mm



MODEL	DESCRIPTION
000708	Mini tool holder with bracket

FIXTURED F-SERIES NUTRUNNERS




FEATURES AND BENEFITS

- Reduced Cable Numbers – Integral type tube containing torque sensor cable and resolver cable
- Enhanced Memory Capacity – Designed with increased memory capacity for improved efficiency of assembly line and tightening data control
- Open Network Communication – Various communication boards are available (M-NET, Device net, Inter-bus, CC-link)
- Automatic Setting (Automatic recommended value input) – Advance value preparation per application will help you simplify your parameter setting
- Space Saving – One-piece spindle controller/driver unit reduces space occupancy by 40% to 60%


NO. OF SPINDLES	VOLUME & WIDTH BEFORE		VOLUME & WIDTH WITH F-SERIES					
	CM	MM	UEC-F024H		UEC-F060H		UEC-F120H	
1-Spindle	16,800	200	5,512	130	6,106	144	6,784	160
2-Spindle	24,360	290	8,056	190	9,243	218	10,600	250
5-Spindle	47,040	560	15,688	370	18,656	440	22,048	520
10-Spindle	84,840	1,010	28,408	670	34,344	810	41,128	970

F-SERIES NETWORK CONNECTIVITY

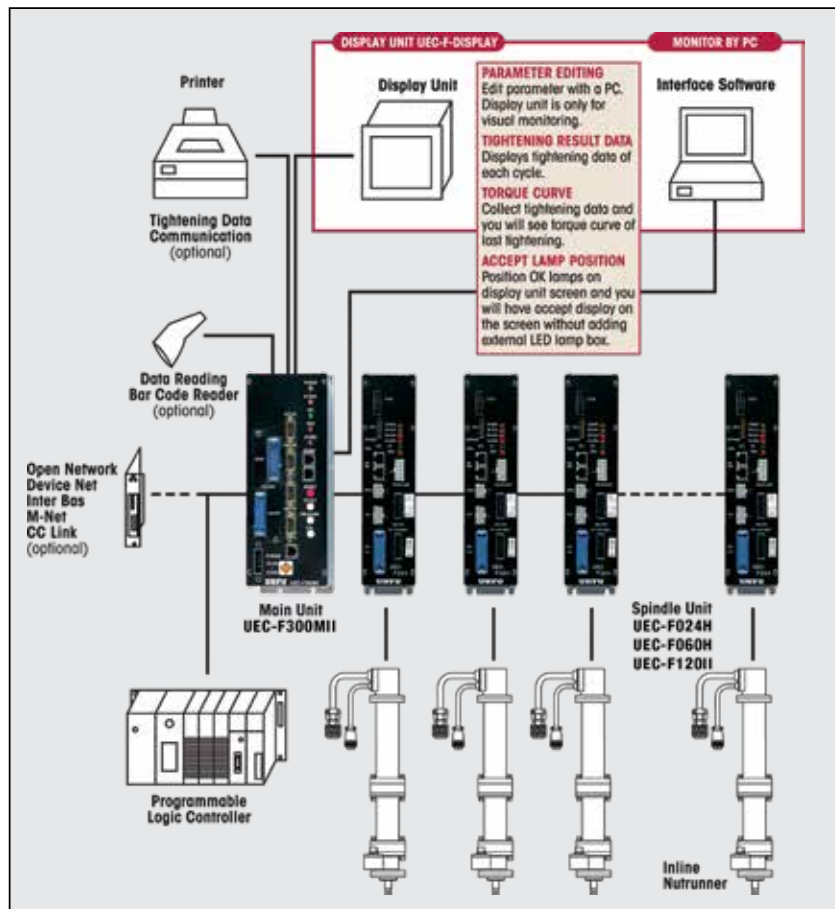


FIXTURED F-SERIES NUTRUNNERS

Main Unit UEC-F300MII
Controls up to 31 spindle units and directs fastening.

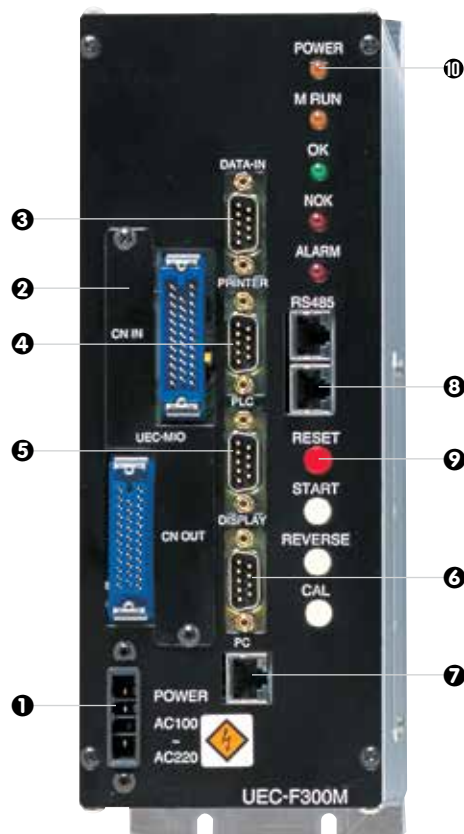


- 1 Power Socket**
AC100 ~ 220V single phase
- 2 External Input/Output Connector**
PLC1: input signal connector for control signal input (fixed allocation)
PLC2: output signal connector for judgement result and status output (free allocation)
- 3 Serial Port (Data Input Connector)**
RS232C DATA-IN accepts serial numbers, etc. provided by external equipment such as a barcode reader then outputs tightening data together with serial numbers
- 4 Serial Port (Data Output Connector)**
RS232C PRINTER outputs tightening result data to your printer (free format)
- 5 Serial Port (Data Output Connector)**
RS232C PLC outputs tightening result data to PLC (free format)
- 6 Serial Port (Data Output Connector)**
RS485 outputs tightening result data to an external exclusive display unit
- 7 PC Connector**
RS232C for communication with a PC
- 8 Spindle-to-Spindle Communication Connector**
RS485 for internal spindle unit to spindle unit communications
- 9 Manual Switches**
RESET, START, REVERSE and CAL
- 10 LED Display**
POWER, M RUN, ACCEPT, REJECT and ALARM

Spindle units UEC-F024H &
UEC-F060H
minus UEC-MKB

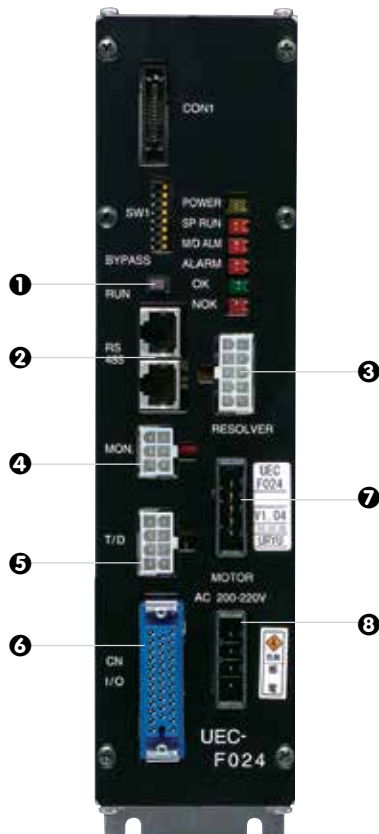

- 1 Status Change Switch**
RUN/BYPASS change switch
RUN: Operation possible status
BYPASS: Non-operation status
- 2 External Communication Device**
RS485 connector
- 3 Resolver Connector**
Tool and resolver connection
- 4 MON Connector (Monitor Output)**
Analog torque electric pressure and angle pulse output
- 5 T/D Connector**
Tools torque sensor connection
- 6 I/O Connector**
External input and output control connection
- 7 MOTOR Connector**
Connection with tools magnet motor
- 8 AC IN Connector**
AC200V ~ 220V 3-phase power socket

UEC-F024H with optional
UEC-MKB display unit


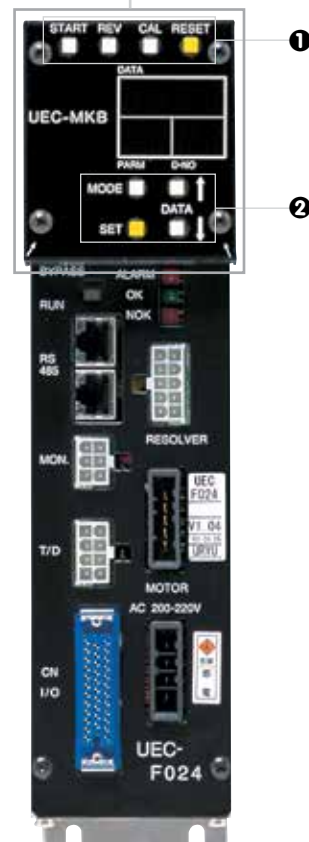


- 1 Manual Operation Switches**
START: manual start switch
REVERSE: Manual reverse switch
CAL: Manual calibration switch
RESET: Manual reset switch
- 2 Data Display Operation Switch**
MODE switch
SET switch
DATA UP switch
DATA DOWN switch

NOTE: Display unit (UEC-MKB) is an option

FIXTURED F-SERIES NUTRUNNERS

INLINE NUTRUNNERS

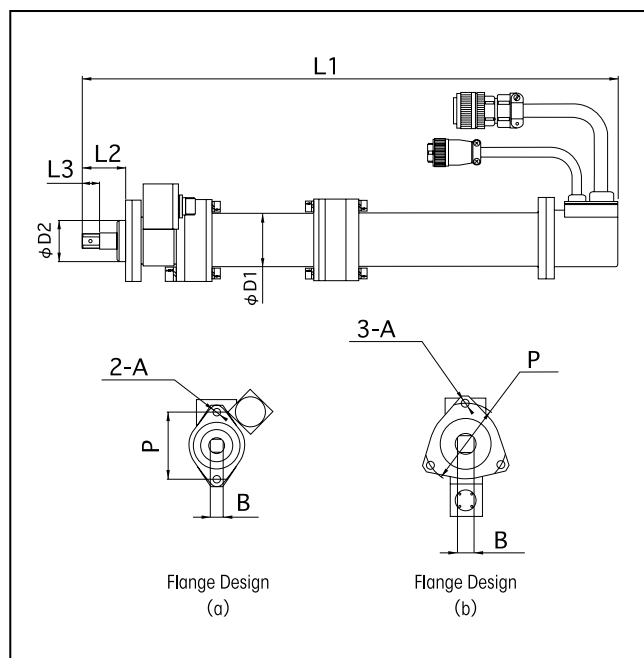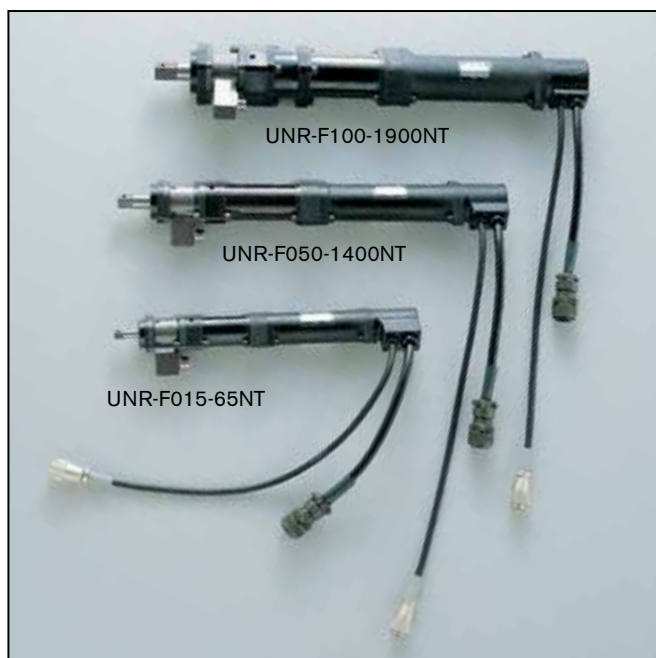

The "F" Series Nutrunner System will satisfy multiple tightening patterns.

- Torque tightening
- Spline press fit tightening
- Torque
- Pin hole alignment tightening
- Angle tightening
- Pre-load detection
- Angle
- Idle operation check
- Plastic range monitor

Rated Strain	2000X10-6
Output Voltage	1.0 mV/V
Non-Linearity	±0.5% R.O.
Influence on Zero Point Due to Temperature	±0.1% R.O./°C
Temperature Rating	-10 ~ +65°C
Input Output Resistance	480Ω
Maximum Input Voltage	16V
Insulation Resistance	Greater than 300Ω
Overload Capacity	150%


Inline Nutrunner Specifications

MODEL	EXTERNAL DIMENSIONS (MM)								TORQUE SENSOR	CAPACITY NM	MOTOR TYPE	TIGHTENING TORQUE NM	FREE SPEED RPM	WEIGHT KG	SPINDLE UNIT	FLANGE DESIGN
	L1	L2	L3	D1	D2	P	A	B								
UNR-F015-45NT	371	41	12	40.5	38	51	M6	9.5	TM-035	34.3	F015	4.5	3,200	2.48	UEC-F024H	(a)
UNR-F015-65NT	371	41	12	40.5	38	51	M6	9.5	TM-035	34.3	F015	6.5	2,200	2.48	UEC-F024H	(a)
UNR-F015-200NT	400	41	12	40.5	38	51	M6	9.5	TM-035	34.3	F015	20	730	2.73	UEC-F024H	(a)
UNR-F015-280NT	400	41	12	40.5	38	51	M6	9.5	TM-035	34.3	F015	28	500	2.73	UEC-F024H	(a)
UNR-F015-350NT	400	41	12	40.5	38	51	M6	9.5	TM-035	34.3	F015	35	410	2.73	UEC-F024H	(a)
UNR-F050-270NT	453.5	41	12	50	38	51	M6	9.5	TM-035	34.3	F050	27	1,750	4.86	UEC-F060H	(a)
UNR-F050-630NT	500.5	41	16.5	50	38	62	M8	12.7	TM-085	83.3	F050	63	750	5.08	UEC-F060H	(a)
UNR-F050-730NT	500.5	41	16.5	50	38	62	M8	12.7	TM-085	83.3	F050	73	650	5.08	UEC-F060H	(a)
UNR-F050-880NT	512.5	45	20	50	48	62	M8	15.88	TM-150	147	F050	88	540	5.47	UEC-F060H	(a)
UNR-F050-1400NT	512.5	45	20	50	48	62	M8	15.88	TM-150	147	F050	140	340	5.47	UEC-F060H	(a)
UNR-F100-1300NT	519.5	45	20	62	48	62	M8	15.88	TM-150	147	F100	130	730	7.42	UEC-F120II	(a)
UNR-F100-1900NT	515.5	45	20	62	48	76	M8	15.88	TM-250	245	F100	190	500	7.94	UEC-F120II	(b)
UNR-F100-2500NT	515.5	45	20	62	48	76	M8	15.88	TM-250	245	F100	250	370	7.94	UEC-F120II	(b)
UNR-F100-3700NT	589	57	30	62	58	76	M10	19	TM-400	392	F100	370	260	9.55	UEC-F120II	(b)
UNR-F100-5400NT	704.5	80	40	62	70	90	M10	25.4	TM-700	686	F100	540	175	17.0	UEC-F120II	(b)
UNR-F100-7000NT	704.5	80	40	62	70	90	M11	25.4	TM-700	686	F100	700	120	17.0	UEC-F120II	(b)
UNR-F100-10000NT	704.5	80	40	62	70	90	M11	25.4	TM-1000	980	F100	1,000	90	17.0	UEC-F120II	(b)

FIXTURED F-SERIES NUTRUNNERS



“F” NUTRUNNER MOTORS’ MINIMUM PITCH CIRCLE

Refer to minimum pitch circles for designing your machine.

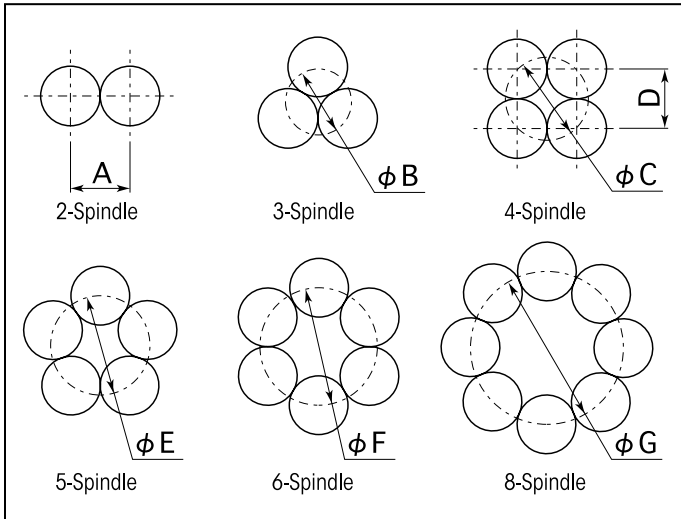

TYPE	DIMENSIONS (MM)						
	A	B	C	D	E	F	G
UNR-F015-45NT	43	52	64	46	74	92	122
UNR-F015-65NT	43	52	64	46	74	92	122
UNR-F015-200NT	43	52	64	46	74	92	122
UNR-F015-280NT	43	52	64	46	74	92	122
UNR-F015-350NT	43	52	64	46	74	92	122
UNR-F050-270NT	59	72	90	64	108	122	160
UNR-F050-630NT	59	72	90	64	108	122	160
UNR-F050-730NT	59	72	90	64	108	122	160
UNR-F050-880NT	59	72	90	64	108	122	160
UNR-F050-1400NT	59	72	90	64	108	122	160
UNR-F100-1300NT	66	75	92	65	116	130	170
UNR-F100-1900NT	70	100	110	78	115	132	174
UNR-F100-2500NT	70	100	110	78	115	132	174
UNR-F100-3700NT	76	100	110	78	120	140	184
UNR-F100-5400NT	94	125	143	102	166	188	257
UNR-F100-7000NT	94	125	143	102	166	188	257
UNR-F100-10000NT	94	125	143	102	166	188	257

RIGHT ANGLE NUTRUNNERS

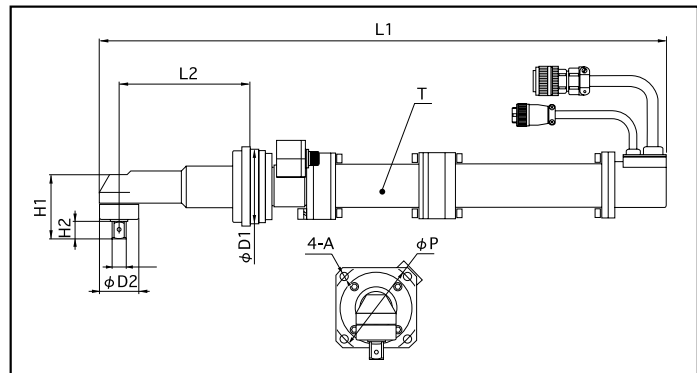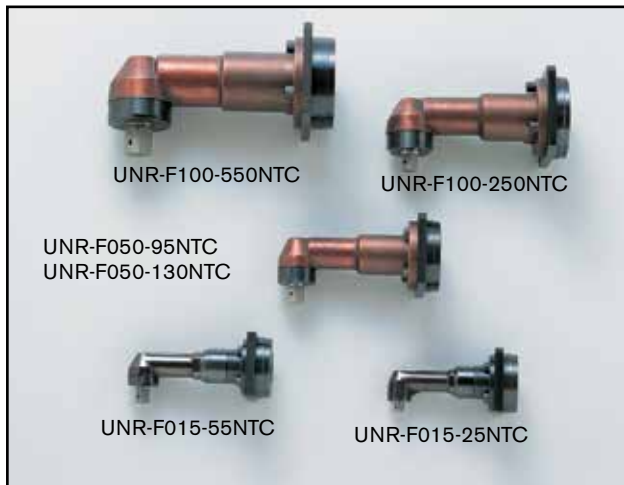

Right Angle Nutrunner Specifications

MODEL	EXTERNAL DIMENSIONS (MM)									STRAIGHT MOTORS			TIGHTENING TORQUE (NM)	FREE SPEED (RPM)	WEIGHT (KG)	SPINDLE UNIT
	L1	L2	H1	H2	D1	D2	P	A	B	TYPE	SENSOR	MOTOR				
UNR-F015-25NTC	507	120	49	10.6	70	28	85	M6	9.5	UNR-F015-200NT	TM-035	F015	25	460	4.18	UEC-F024
UNR-F015-55NTC	521	130	58	18	70	36	85	M6	12.7	UNR-F015-350NT	TM-035	F015	55	260	4.37	UEC-F024
UNR-F050-95NTC	643	150	73.5	20	85	45	102	M6	15.88	UNR-F050-630NT	TM-085	F050	95	480	8.08	UEC-F060
UNR-F050-130NTC	649	150	73.5	20	85	45	102	M6	15.88	UNR-F050-880NT	TM-150	F050	130	340	8.3	UEC-F060
UNR-F100-200NTC	681.5	170	85.5	20	85	56	102	M6	15.88	UNR-F100-1300NT	TM-150	F100	200	460	11.92	UEC-F120
UNR-F100-250NTC	677.5	170	85.5	20	100	56	120	M8	15.88	UNR-F100-1900NT	TTM-150	F100	250	340	12.3	UEC-F120
UNR-F100-380NTC	716.5	200	109.5	25	110	74	134	M10	19	UNR-F100-2500NT	TM-250	F100	380	235	15.92	UEC-F120
UNR-F100-550NTC	784	200	114.5	29	110	74	134	M10	25.4	UNR-F100-3700NT	TM-400	F100	550	165	17.43	UEC-F120

TORQUE MEASUREMENT: OVERVIEW


Torque measurement and the verification of torque tools and applied torque are an integral part of today's threaded assembly process. The method used to measure torque can affect the judgments made regarding tool performance, assembly processes and overall product quality.

DYNAMIC TORQUE

Dynamic torque is the torque produced during the actual tightening process, normally measured using rotary transducers and a torque analyzer.

Advantages:

- Reduces operator influence
- Measures applied torque
- Can also include angle of rotation as error proofing parameter

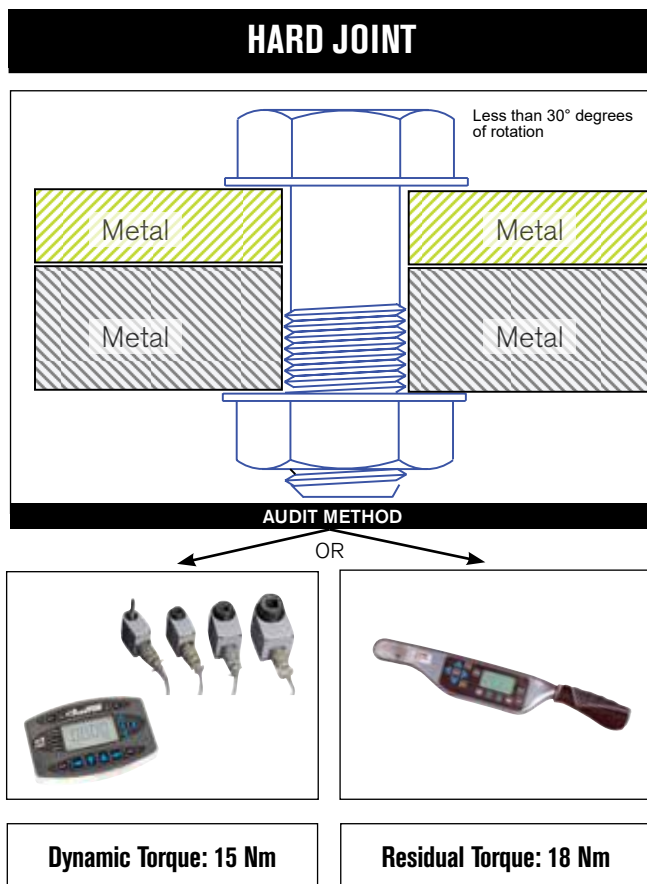

Values as examples only


A hard joint, one requiring a low degree of rotation during tightening, will normally show very little relaxation after tightening. Due to the high amount of remaining clamp load and friction within the joint members, additional movement of the fastener requires additional torque energy to be applied. Therefore, Residual Torque values will be higher than Dynamic Torque values.

RESIDUAL TORQUE

Residual torque is the torque measured by producing an incremental amount of movement of the fastener after the actual tightening process, normally measured using a dial or digital torque wrench.

Advantages:

- Easy access to fastener
- Error proofing
- Can detect missed fasteners or joints with significant relaxation

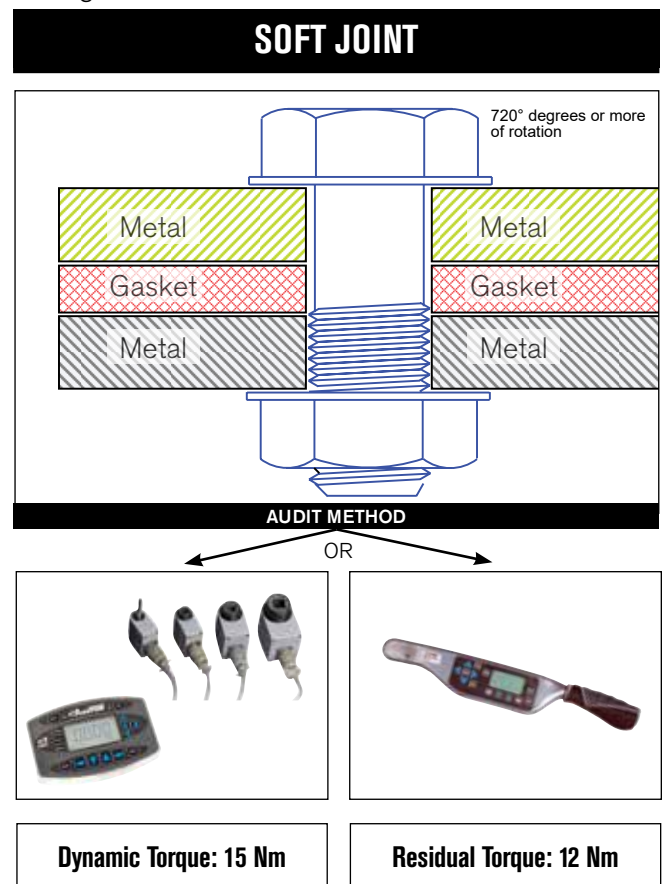

Values as examples only

A soft joint, one requiring a high degree of rotation during tightening, will normally show significant amounts of relaxation after tightening. Relaxation leads to a loss of clamp load and friction within the joint members. Due to this relaxation, additional movement of the fastener requires relatively small amounts of additional torque energy and Residual Torque values will be lower than Dynamic Torque values.

TORQUE MEASUREMENT: OVERVIEW

Checking torque measurement before, during, and after assembly ensures quality manufacturing. Proper torque measurement is critical in many assembly operations. AIMCO utilizes years of experience to design a process around your specific auditing requirements. From simple dial wrenches to electronic data collectors and joint analyzers for R&D, AIMCO is with you every step of the way.

BEFORE ASSEMBLY

Tool Capability



Is the tool working correctly?

Testing and verifying tools under controlled conditions helps you identify accuracy and repeatability before using them in production.

Equipment used:

- Desktop testers with internal transducers
- Auditor analyzers with either stationary or rotary transducers
- UFT hydraulic joint simulators and rotary transducers

DURING ASSEMBLY

Process Capability



How does the tool work with the product being assembled?

Testing the tools during the actual process helps ensure that the process is working correctly. Variables in the parts and influences from the operator can be accounted for.

Equipment used:

- Torque Data Collectors/ Analyzers
- Auditor Rotary Transducers

AFTER ASSEMBLY

Product Capability



Does the finished product meet expectations?

Checking the product after assembly is the final opportunity to verify that product quality is satisfactory before user delivery

Equipment used:

- Click/Dial wrenches
- Electronic wrenches with Auditor analyzers
- Rotary transducers and Auditor analyzers with hand driver to move fastener

AUDITORTM

TORQUE MEASUREMENT: OVERVIEW

MEASURING QUALITY – PROCESS CAPABILITY


STATISTICAL ANALYSIS IS AN IMPORTANT STEP IN ANY QUALITY CONTROL PROCESS.

One of the most widely accepted statistical indicators of process quality, and therefore product quality, is Cpk, or the process capability for a centered process. This value indicates how capable a process is and whether the results of that process are properly centered near a specific target. A capable process is one that approaches, as a limit, 100% conformance to specifications.

Cpk is a statistical value that indicates how tightly grouped a series of samples is around the target value. Cpk is a function of the Upper Specification Limit (USL), the Lower Specification Limit (LSL), the mean of the samples and the standard deviation (σ) of the samples.


$$Cpk = \text{either } \frac{USL - \text{Mean}}{(3 \times \sigma)} \text{ or } \frac{\text{Mean} - LSL}{(3 \times \sigma)}, \text{ whichever is smaller.}$$

An acceptable, or capable, process will normally have a Cpk value of at least 1.33.

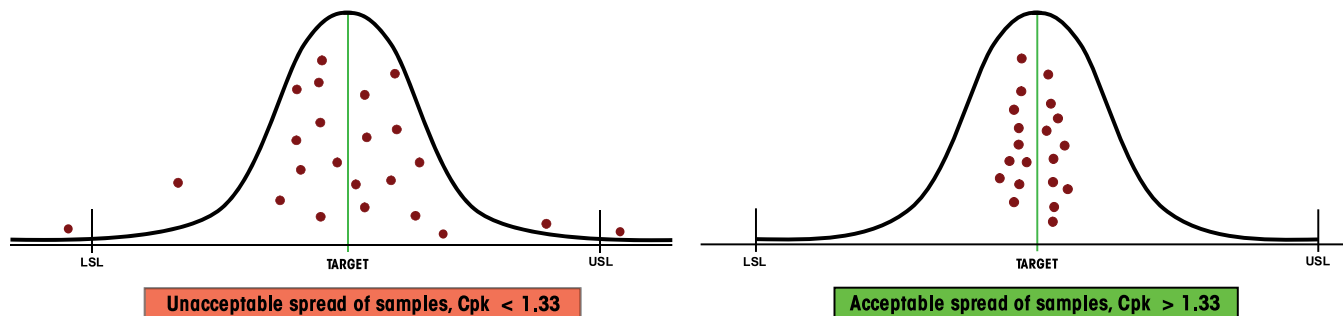



MEASURING QUALITY – CLAMP LOAD

The purpose of threaded fastening is to produce the correct amount of clamp load within the joint.

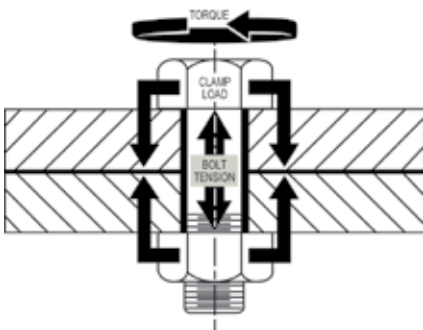

Due to the cost and difficulty of measuring clamp load during the actual assembly process, torque is used as the control parameter during tightening. Many manufacturers use torque values as the primary indicator of threaded assembly quality. However, achieving repeatable clamp load is a better indicator of joint quality.

Studies have shown that discontinuous drive tools can produce equal or better clamp load results when compared to continuous drive tools.

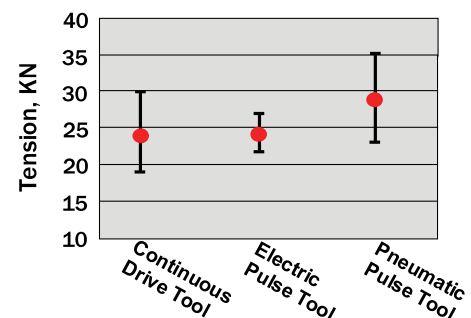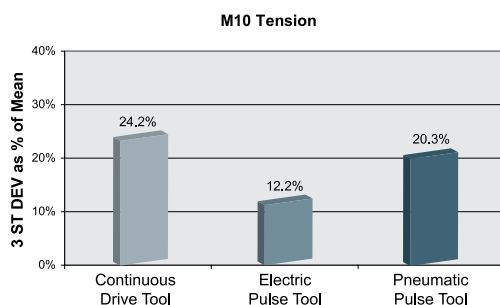

TORQUE MEASUREMENT SYSTEMS



TORQUE MEASUREMENT SYSTEMS

DEVICES	MODEL SERIES	DATA COLLECTOR	INTEGRATED TRANSDUCER	TORQUE WRENCH	TORQUE WRENCH LOADER	EXTERNAL TRANSDUCER PORT	STATIONARY TRANSDUCERS -SMART	STATIONARY TRANSDUCERS -IND STD	ROTARY TRANSDUCER -SMART	ROTARY TRANSDUCER - IND STD
Testers	ATC		X							
	AUET		X							
	AUET-DC	X	X							
	AUET/MTM		X			X				
	AUET/MTM-DC	X	X			X				
Analyzers	ATDA					X				
	ATDA-DC	X				X				
	ATDA-8000-10-DCA(-TA)(-TP)	X				X				
Test Stands	AHCTS*	X*	X*	X*			X*	X*	X*	X*
	AHCTS-K*	X*	X*	X*			X*	X*	X*	X*
	AHDTs*	X*	X*	X*			X*	X*	X*	X*
	AHBTS*	X*	X*	X*			X*	X*	X*	X*
	AIMTS*	X*	X*	X*			X*	X*	X*	X*
Wrenches	ADW			X						
	ADW-DC	X								
	APTW			X						
	ATW			X						
	ATWL				X					
	Moment Alpha	X		X						
Torque Cart	iTVC*	X*	X*	X*			X*	X*	X*	X*
Transducers	ARTIS									X
	ASTIS							X		
	AISI						X			
	AISF						X			
Rundown Fixtures	AJKR									
	AJKS									
	ARDFA									
	ARDIA									
Joint Simulator	UFT									

*configured to customer specifications

TORQUE MEASUREMENT TESTERS

TORQUE MEASUREMENT: TESTERS

Features and Benefits

- Heavy industrial design
- All software included
- Auditor Torque Testers are designed for intuitive and functional usability. AUET/MTM models are available with our unique dual integrated torque transducer package.

Testers are designed to audit torque wrenches and power tools, including pulse tools



	ATC	AUET	AUET/MTM	AUET-DC	AUET/MTM-DC
	Auditor Torque Cube	Auditor Universal Electronic Tester	Auditor Universal Electronic Tester - Multiple Transducer Module	Auditor Universal Electronic Tester - Data Collector	Auditor Universal Electronic Tester/Multiple transducer Module - Data Collector
	Compact vertical or horizontal bench-mount tester.	Bench mount or line side tester utilizing integrated transducer.	Bench mount or line side tester with dual integrated transducer and external transducer capacity.	Bench mount or line side tester utilizing integrated transducer. Provides data collection capability with included software to interface with PC.	Bench mount or line side tester with dual integrated transducer and external transducer capacity. Data collection capability with included software to interface with PC.
Integrated Transducer Range (values are in full scale)	1 - 1,350 Nm 100 in-oz - 1,000 ft-lb	1 - 1,000 Nm 100 in-oz - 750 ft-lb	1 - 1,000 Nm 100 in-oz - 750 ft-lb	1 - 1,000 Nm 100 in-oz - 750 ft-lb	1 - 1,000 Nm 100 in-oz - 750 ft-lb
External Transducer Capacity (Transducer sizes exceeding this range may be special ordered)			up to 5,000 ft-lb		up to 5,000 ft-lb
Vertical / Horizontal Mount	X				
Bi-directional accuracy of +/- X of indicated reading within the top 90% of the tester's capacity	1%	0.50%	0.50%	0.50%	0.50%
Data Output to PC	X	X	X	X	X
Integrated Torque Transducer	1	1	2	1	2
External Transducer Port			X		X
Number of Stored Readings	999	999	999	999	999
Adjustable Rundown Fixture Included *	1	1	2	1	2
Rechargeable NiMH Battery	X	X	X	X	X
Measurement Modes					
Peak	X	X	X	X	X
First Peak (Click)	X	X	X	X	X
Pulse	X	X	X	X	X
Track	X	X	X	X	X
Units of Measure Options	8	8	8	8	8
Tool Manager Software Included				X	X

* Included with all testers and analyzers with a range up to 1000 in-lb.

TORQUE MEASUREMENT TESTERS USED IN CONJUNCTION WITH

External Transducers

ASTIS - Stationary			X		X
AISI / AISF - Stationary - Analog			X		X
ARTIS - Rotary			X		X

Switch box for External Transducer

AISWT-4L > 4 Way Intellect box			X		X
AISWT-6L > 6 Way Intellect box			X		X

Cables

ICBL-USB - USB Serial > PC	X	X	X	X	X
ATDBLIS - IS Transducer w/angle (10 Pin)			X		X
ATDBRIS - IS Transducer (4 Pin)			X		X
ICBL-10P - Intellect transducer cable Identification chip in cable - 10 pin connector			X		X
ICBL-4P - Intellect transducer cable. Identification chip in cable - 4 pin connector			X		X
ICBL-5000L - Connect from AUET/MTM & ATDA to Intellect Transducers, Analog AISI / AISF			X		X

AUDITOR TORQUE CUBE



ATC-10
ATC-25
ATC-100
ATC-250
ATC-500
ATC-750
ATC-1800



ATC-150F
ATC-250F
ATC-500F
ATC-750F

AUDITOR™

AUDITOR TORQUE CUBE

The Auditor Torque Cube (ATC) is a compact, versatile desktop tester that provides a multitude of capabilities. The ATC is designed to test hand or power tools with the following:

- Peak, first peak, and track modes
- Multiple engineering units
- Manual and auto clear function
- Multiple frequency response settings
- Bi-directional use and accuracy
- Accuracy is better than 1% of indicated reading top 90% of range
- Serial data output
- Memory: 999 data samples
- Battery and/or mains powered

Because precision and quality are critical, you can depend on our testers to calibrate and certify your tools. Whether you are assembling large complicated systems or small precise time pieces, AIMCO provides the best system for your application. Our instruments have been judged "best in class" by independent National Standards laboratories. Auditor Torque Cube is rugged enough to test and verify tools at "point of use" while still being accurate enough to calibrate hand and power tools.

Each tester is shipped with a mains/battery charger power cord, a hex to allen drive bit, and a bolting template. Models with max torque of 1,000 in-lb or less also include a joint rundown fixture. The ATC can be positioned vertically or horizontally for the ergonomic testing of inline or pistol grip tools.

MODEL	RECOMMENDED TORQUE RANGE		WEIGHT	W X H X D		SQUARE DRIVE
	NM	IN-LB/FT-LB	KG	LB	MM	IN
Vertical Configuration						
ATC-10	0.13 - 1.13	1 - 10 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25
ATC-25	0.28 - 2.83	2.5 - 25 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25
ATC-100	1.13 - 11.3	10 - 100 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25
ATC-250	2.83 - 28.3	25 - 250 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25
ATC-500	5.65 - 56.5	50 - 500 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25
ATC-750	8.47 - 84.8	75 - 750 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25
ATC-1000	11.3 - 113	100 - 1000 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25
ATC-1800	21.2 - 203	188 - 1,800 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25
Horizontal Configuration						
ATC-150F	20 - 200	15 - 150 ft-lb	2.25	5	79 x 95 x 83	3.13 x 3.75 x 3.25
ATC-250F	34 - 340	25 - 250 ft-lb	2.25	5	79 x 95 x 83	3.13 x 3.75 x 3.25
ATC-500F	68 - 678	50 - 500 ft-lb	2.25	5	79 x 95 x 83	3.13 x 3.75 x 3.25
ATC-750F	102 - 1,017	75 - 750 ft-lb	2.25	5	79 x 95 x 83	3.13 x 3.75 x 3.25

AUDITOR BENCH-MOUNT TESTERS



AUET



AUET/MTM



AUET/MTM-DC

AUDITOR UNIVERSAL ELECTRONIC TESTERS

Auditor Universal Electronic Testers (AUET) have a broad range of features to accommodate most requirements. They are designed to be bench-top mounted and are available in several configurations and various single or multiple torque ranges. Onboard memory allows you to capture 999 torque event readings. The testers are also available in file capability (DC) models that require PC software Auditor Tool Manager (ATM).

Instruments up to 1,000 in-lb are supplied with rundown adapters/joint kits. Rundown kits for larger instruments can be ordered separately. AUET/MTM units are supplied with an external transducer port and selector switch for connecting additional transducers.

AUET testers utilize the same transducers as the ATC instruments, providing the same high quality accuracy and durability. The common interface makes the Auditor tester extremely user friendly.



Single Transducer Models

MODEL*	RECOMMENDED TORQUE RANGE	
	KGf-CM/NM	IN-OZ/IN-LB
AUET-050(-DC)	0.4 - 3.6 kgf-cm	5 - 50 in-oz
AUET-0100(-DC)	0.7 - 7.2 kgf-cm	10 - 100 in-oz
AUET-10(-DC)	1.1 - 11.5 kgf-cm	1 - 10 in-lb
AUET-50(-DC)	0.5 - 5.6 Nm	5 - 50 in-lb
AUET-100(-DC)	1.1 - 11.3 Nm	10 - 100 in-lb
AUET-250(-DC)	2.8 - 28.3 Nm	25 - 250 in-lb
AUET-500(-DC)	5.7 - 56.5 Nm	50 - 500 in-lb
AUET-1000(-DC)	11.3 - 113 Nm	100 - 1,000 in-lb
AUET-1200(-DC)	13.6 - 135.6 Nm	120 - 1,200 in-lb
AUET-1800(-DC)	20.3 - 203.4 Nm	180 - 1,800 in-lb

* Add "-DC" to part numbers for data collecting models.

Data collecting models allow multiple files/tools/applications to be associated with torque data. Requires Tool Manager software.

Custom sizes are also available. Contact an AIMCO Customer Service Associate for ordering options, 1-503-254-6600, or toll free 1-800-852-1368.

Dual Transducer Models

MODEL**	RECOMMENDED TORQUE RANGE			
	TRANSDUCER 1	TRANSDUCER 2	TRANSDUCER 1	TRANSDUCER 2
AUET/MTM-050-25	0.04 - 0.4 Nm	0.3 - 2.8 Nm	5 - 50 in-oz	2.5 - 25 in-lb
AUET/MTM-050-600	0.04 - 0.4 Nm	6.8 - 67.8 Nm	5 - 50 in-oz	60 - 600 in-lb
AUET/MTM-0100-050	0.07 - 0.71 Nm	0.04 - 0.4 Nm	10 - 100 in-oz	5 - 50 in-oz
AUET/MTM-10-100	0.11 - 1.12 Nm	1.3 - 11.3 Nm	1.0 - 10 in-lb	10 - 100 in-lb
AUET/MTM-50-250	0.56 - 5.65 Nm	2.8 - 28.3 Nm	5.0 - 50 in-lb	25 - 250 in-lb
AUET/MTM-50-500(-DC)	0.56 - 5.65 Nm	5.7 - 56.5 Nm	5.0 - 50 in-lb	50 - 500 in-lb
AUET/MTM-50-1000(-DC)	0.56 - 5.65 Nm	11.3 - 113 Nm	5.0 - 50 in-lb	100 - 1,000 in-lb
AUET/MTM-100-500	1.13 - 11.3 Nm	5.7 - 56.5 Nm	10 - 100 in-lb	50 - 500 in-lb
AUET/MTM-100-1000	1.13 - 11.3 Nm	11.3 - 113 Nm	10 - 100 in-lb	100 - 1,000 in-lb
AUET/MTM-100-1200	1.13 - 11.3 Nm	13.6 - 135.6 Nm	10 - 100 in-lb	120 - 1,200 in-lb
AUET/MTM-100-1600(-DC)	1.13 - 11.3 Nm	18.1 - 180.8 Nm	10 - 100 in-lb	160 - 1,600 in-lb
AUET/MTM-100-2000	1.13 - 11.3 Nm	22.6 - 226 Nm	10 - 100 in-lb	200 - 2,000 in-lb
AUET/MTM-250-1600	2.82 - 28.2 Nm	18.1 - 180.8 Nm	25 - 250 in-lb	160 - 1,600 in-lb
AUET/MTM-250-1800	2.82 - 28.2 Nm	20.3 - 203.4 Nm	25 - 250 in-lb	180 - 1,800 in-lb
AUET/MTM-250-2500	2.82 - 28.2 Nm	28.2 - 282.5 Nm	25 - 250 in-lb	250 - 2,500 in-lb
AUET/MTM-500-1200	5.7 - 56.5 Nm	13.6 - 135.6 Nm	50 - 500 in-lb	120 - 1,200 in-lb
AUET/MTM-500-2500(-DC)	5.7 - 56.5 Nm	28.2 - 282.5 Nm	50 - 500 in-lb	250 - 2,500 in-lb

Custom sizes are also available. Contact an AIMCO Customer Service Associate for ordering options, 1-503-254-6600, or toll free 1-800-852-1368.

AUDITOR TORQUE MEASUREMENT ANALYZERS

TORQUE MEASUREMENT: ANALYZERS

Features and Benefits

- Auditor Torque Analyzers share similar features across all products and are designed for intuitive and functional usability.
- Connects to AIMCO's line of rotary and stationary transducers



	ATDA	ATDA-DC	ATDA-8000	ATDA-8000-10-DCA(-TA)(-TP)
Auditor Torque Data Analyzer		Auditor Torque Data Analyzer with Data Collection	Auditor Torque Data Analyzer with 7" screen	Auditor Torque Data Analyzer 10" display with Data Collection. TA = Torque & Angle, TP = Torque & Pressure
Portable analyzer to be connected to various transducers		Portable analyzer to be connected to various transducers. Provides data collection capability with included software to interface with PC	7" screen with high resolution display and intuitive user interface	10" touch screen with high resolution display and intuitive user interface with multiplexer
Bi-directional	X	X	X	X
Data Output to PC	X	X	X	X
External Transducer Port	1	1	1	4
Number of stored readings	999	999	999	999
Rechargeable NiMH Battery	X	X	X	X
Digital I/O for external devices	X	X	X	X
Measurement Modes	X	X	X	X
Peak	X	X	X	X
First Peak (Click)	X	X	X	X
Pulse	X	X	X	X
Track	X	X	X	X
Measurement Units	8	8	8	8
Software Included		X	X	X
Barcode Reader Capable			X	X

USED IN CONJUNCTION WITH

Transducers				
AISI / AISF - Analog	X	X		
AISI / AISF - Digital			X	X
ASTIS - Stationary	X	X		
ARTIS - Rotary	X	X		
Wrenches				
ATW	X	X		
Switch boxes for External Transducers				
AISWT-4L > 4 Way Intellect box	X	X		
AISWT-6L > 6 Way Intellect box	X	X		
Cables				
ICBL-USB - USB Serial > PC	X	X		
ATDBLIS - IS Transducer w/ angle (10 Pin)	X	X		
ATDBRIS - IS Transducer (4 Pin)	X	X		
ICBL-10P - Intellect transducer cable. Identification chip in cable 10 pin connector	X	X		
ICBL-4P - Intellect transducer cable. Identification chip in cable 4 pin connector	X	X		
ICBL-5000L - Connect from AUET/ MTM & ATDA to Intellect Transducer, Analog AISI / AISF	X	X		
ICBL-8000DIG - Connect from ATDA-8000 series analyzer to Digital AISI / AIFI transducer			X	X

AUDITOR TORQUE DATA ANALYZERS



AUDITOR TORQUE DATA ANALYZERS

The Auditor Torque Data Analyzer (ATDA) DC is designed to be portable or conveniently placed on a bench. The tester can be connected to various transducers, as well as transducerized wrenches and rotary or stationary transducers. The user interface is common between the ATC (Cube), AUET, AUET-DC, AUET/MTM, AUET/MTM-DC, ATDA, and ATDA-DC. All of these instruments have similar menus. Additionally, all data collector testers utilize Auditor Tool Manager for tool testing and data management.

The Auditor Torque Data Analyzer is available in two configurations:

- ATDA: A simple torque analyzer with sequential memory, 999 data samples, engineering limits, limited statistical processing average, range, Cp and CpK with serial output
- ATDA-DC: Contains all of the features of the ATDA and has additional file capability. It can associate data with file names and manage data collection with a computer and Auditor Tool Manager software

This is a great “starter” tool management system. It provides testing, archiving, and analysis of tools at single or multiple torque targets. The tool and torque data is stored in a SQL database and can be exported to Excel or any .csv spreadsheet.

MODEL	DESCRIPTION
ATDA	Auditor Torque Data Analyzer
ATDA-DC	Auditor Torque Data Collector

AUDITOR™

AUDITOR TORQUE DATA ANALYZERS



ATDA-8000

ATDA-8000-10-DCA(-TA)(-TP)

TOUCH SCREEN AUDITOR TORQUE DATA ANALYZERS

Auditor offers the ATDA-8000 and the ATDA-8000-10-DCA(-TA)(-TP). The ATDA-8000 is a touch screen instrument with a high resolution display and user interface that facilitates “point of use” tool validation. The user interface is intuitive and the display provides clear easy to read data. Features and parameter settings are password protected to ensure parameters cannot be inadvertently changed. After initial setup, the instrument provides semi-automatic tool validation and judgment.


The ATDA-8000 is a single channel instrument. The ATDA-8000-10-DCA(-TA)(-TP) is a larger instrument that includes a multiplexor for connection to multiple transducers allowing a wide range of tools to be tested with one instrument. The (-TA) model is designed for torque and angle analysis and the (-TP) model is designed for torque and pressure analysis.

Both the ADTA-8000 and the ATDA-8000-10-DCA(-TA)(-TP) systems work with AIMCO's line of digital transducers.


MODEL	DESCRIPTION
ATDA-8000	Auditor Torque Analyzer Single channel 7" touch screen point of use validation system
ATDA-8000-10-DCA(-TA)(-TP)	Auditor Torque Analyzer Multiple transducer 10" touch screen point of use validation system

AUDITOR™

AUDITOR DATA COLLECTION SOFTWARE

DATA COLLECTION SOFTWARE			
			
	AUDITOR TOOL MANAGER SOFTWARE	AUDITOR AUDIT MANAGER SOFTWARE	SMD TOOLS SOFTWARE
	Test, verify, and archive tools	Comprehensive statistical analysis, data archiving, and data export	Use a PC as a torque tester/display for testers and transducers
	Create a database of tools and store test results with easy-to-use software integrator to/from tester to PC	Facilitate residual auditing with digital wrenches and transducerized wrenches	Comprehensive, pre-configured, and guided testing of specific tools as well as manual testing with all testing parameters adjustable and set by the user

COMPATIBILITY			
Desktop or PC			X
ATC			X
ADW		X	
ATDA			X
ATDA-DC	X	X	
AUET			X
AUET-DC	X	X	
AUET/MTM			X
AUET/MTM-DC	X	X	
ARTIS			
ARTIS-DIG			X
AISI/AISF			
AISI/AISF (Digital)			X
iTVC Torque Cart			X

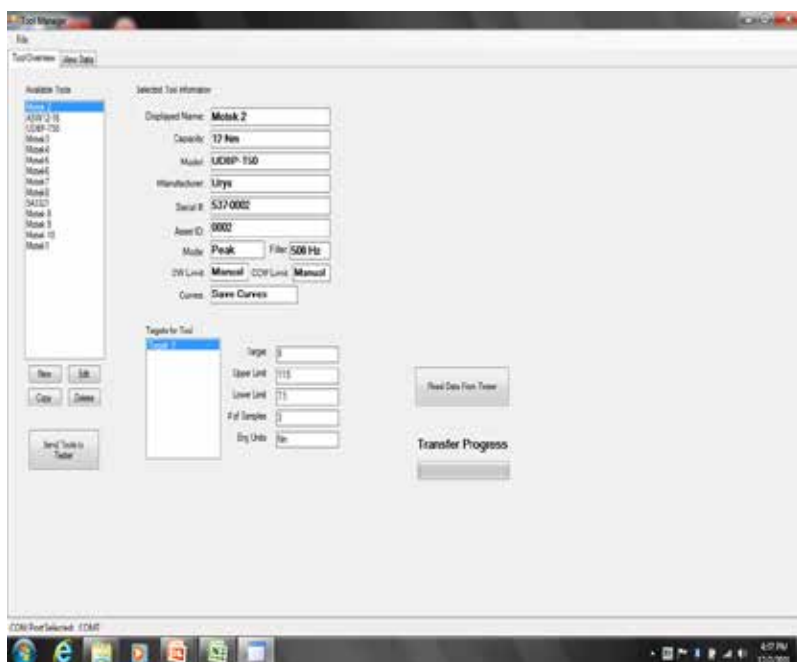

AUDITOR TOOL MANAGER SOFTWARE

Tool Manager Software is included with the purchase of AUET-DC and AUET/MTM-DC data-collecting torque testers, as well as the ADW-DC data-collecting torque wrench. Create a database of tools and store test results with this easy-to-use software integrator to/from tester to PC.


Tool Manager Software, Tool Overview Screen

AUDITOR DATA COLLECTION SOFTWARE

AUDITOR AUDIT MANAGER SOFTWARE

Audit Manager Software is included with the purchase of ATDA-DC data collecting torque analyzers. The View Data tab allows you to look at the collected data and the trace file. This data can be exported to Excel as a .csv file and displayed by Excel charts. The trace file displays the data in a torque/time graph and allows the user to supersede the move-on reading selected by the wrench by visually discerning via the trace where the fastener started to rotate. When selecting a single job the average, range, sigma, Cp, and CpK values are listed.

Audit Manager Software,
Job and Route Builder Screen

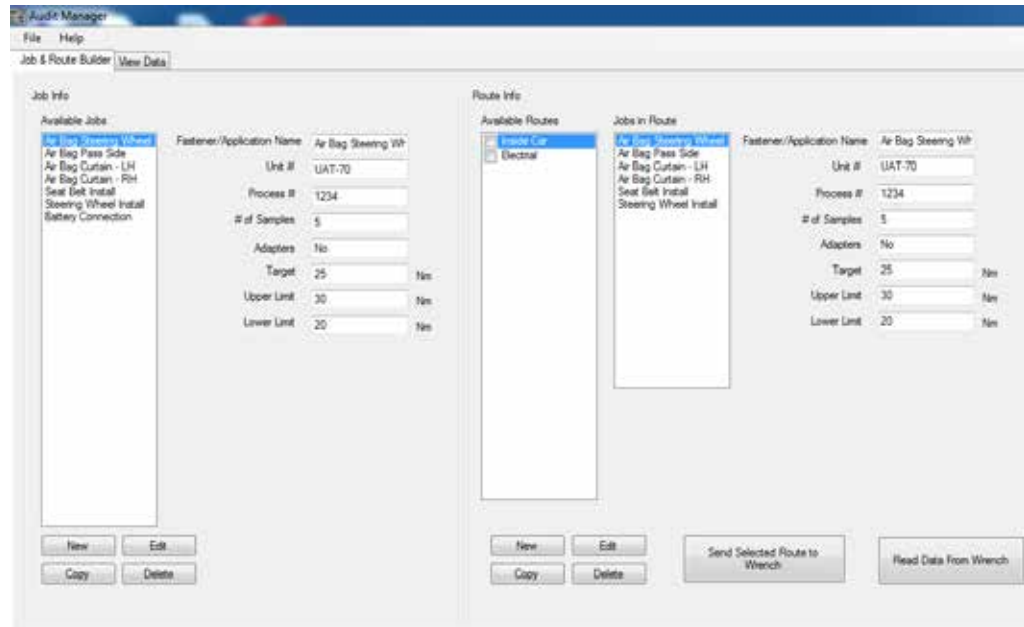


SMD TOOLS SOFTWARE

A digital signal between a PC and a digital transducer allows SMD Tools software to operate independently of a tester or analyzer to collect and store data in Microsoft Excel.

Tool Manager and Test Manager databases within the software stores tool details and test processes for easy access in the Cert Manger platform

Auditor branded analyzers and testers can network with this software to produce and store real-time data

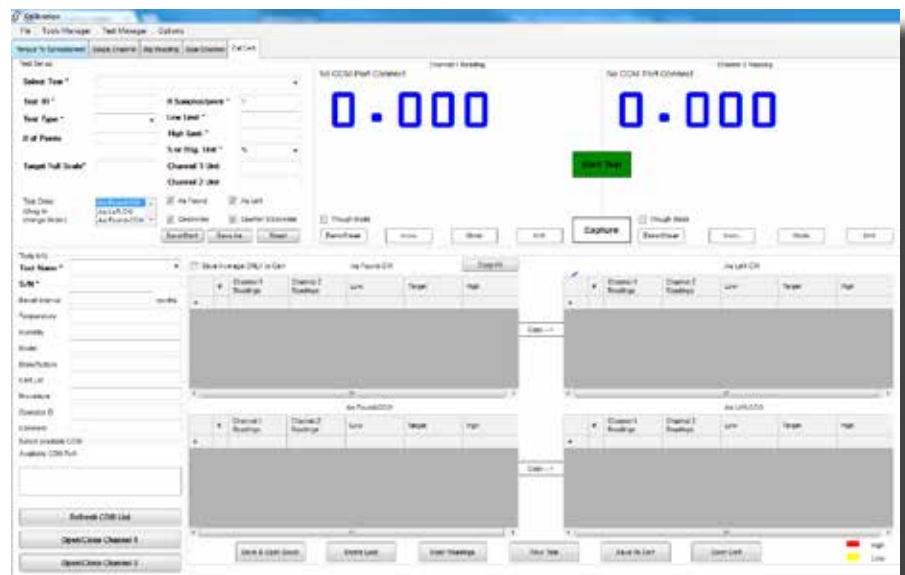

SMD Tools Software, Cal Cert Screen

AUDITOR HIGH-CAPACITY TEST STANDS

TORQUE MEASUREMENT: HIGH CAPACITY TEST STANDS

Features and Benefits

- Advanced test stations for larger tools and higher torque output
- Configured to meet application requirements
- Durable industrial grade devices

				
AHCTS	AHCTS-K	AHDTS	AHBTS	AIMTS
Auditor High Capacity Test Stand	Auditor High Capacity Test Stand - Hydraulic	Auditor High Capacity Test Stand Dual Transducer	Auditor High Capacity Stand w/variable joint simulation	Auditor High Capacity Impact Test Stand
Designed for testing tools with continuous rotating output spindles and pulse tools.	Specifically designed for hydraulic wrenches testing.	Two transducers, one for rotary tools and one for hydraulic tools. Includes rundown & reaction fixtures with a single display.	Designed for testing rotating tools without the use of rundown fixtures. Adjustable airbrake joint simulation eliminates CCW rotation after rundown.	Ideal for testing impact wrenches and is recommended to utilize rundown fixtures when testing impacts.
6,750 Nm	33,750 Nm	33,750 Nm	6,750 Nm	2,700 Nm

ACCESSORIES

Rundown fixtures

	AHCTS	AHCTS-K	AHDTS	AHBTS	AIMTS
AHCTS-3/4RDF	X		X		
AHCTS-1RDF	X		X		
AHCTS-1.5RDF	X		X		

Adapters

		AHCTS	AHCTS-K	AHDTS	AHBTS	AIMTS
Square to Square Drive Adapters*						
	CA1510 1-1/2" Male to 1" Female	X		X	X	
	CA1550 1-1/2" Male to 1/2" Female	X		X	X	
	CA1575 1-1/2" Male to 3/4" Female	X		X	X	
Insert Adapters*						
	CA2510I 2-1/2" Male to 1" Female	X	X	X	X	
	CA2515I 2-1/2" Male to 1-1/2" Female	X	X	X	X	
	CA2575I 2-1/2" Male to 3/4" Female	X	X	X	X	
Square to Hex Drive Adapters*						
	CA150108DHD 1-1/2" Male to 1-1/2" Male Hex		X			

* Partial List. Contact An Aimco Customer Service Associate For More Options, 1-503-254-6600, Or Toll Free 1-800-852-1368.

AUDITOR HIGH-CAPACITY TEST STANDS



AHCTS-5000

AHCTS TEST STAND FOR ROTATING TOOLS

Designed for testing tools with continuous rotating output spindles. The test stand includes a rundown fixture, bushing for side load support, reaction post or reaction paddles, transducer and torque analyzer display.

MODEL	DESCRIPTION
AHCTS-0500	3/4" Square Drive w/rundown fixture
AHCTS-2500	1.5" Square Drive w/rundown fixture
AHCTS-5000	1.5" Square Drive w/rundown fixture
AHCTS-7500	1.5" Square Drive w/rundown fixture

Please refer to Configuration Options on following page for required ordering options.




AHCTS-001K

AHCTS-K STAND FOR HYDRAULIC TOOLS

The AHCTS-K stands are specifically designed for hydraulic wrench testing. Hydraulic wrenches have very low profiles but very high torque output, therefore, working height must be minimized to prevent side loading which could lead to errors in data or damage to tool or reaction devices.

Either stand can be ordered with options such as extension legs, casters, embedded or attached torque analyzers with various rundown fixtures and reaction devices. Contact an AIMCO Customer Service Associate for additional information, 1-503-254-6600, or toll free 1-800-852-1368.

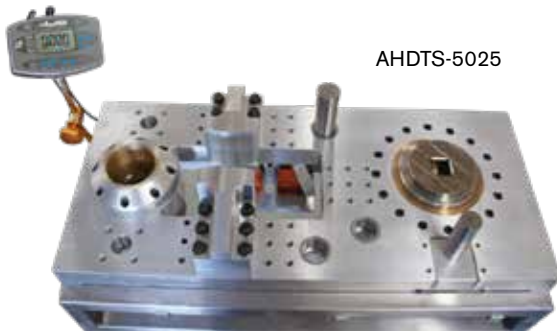

AHDTS-5025

AHDTS DUAL TEST STAND FOR ROTATING AND HYDRAULIC TOOLS

This stand has two transducers embedded into the base, one for rotary tools and one for hydraulic tools. It comes with rundown and reaction fixtures and one display.

MODEL	DESCRIPTION
AHDTS-5025	1.5" Sq Dr dual station w/rundown fixture and reaction devices

Contact an AIMCO Customer Service Associate for ordering options, 1-503-254-6600, or toll free 1-800-852-1368.

MODEL	DESCRIPTION	CAPACITY Ft-Lb
AHCTS-0.5K	3/4" Square Drive w/reaction device	500
AHCTS-001K	1" Square Drive w/reaction device	1,000
AHCTS-2.5K	1.5" Square Drive w/reaction device	2,500
AHCTS-005K	1.5" Square Drive w/reaction device	5,000
AHCTS-010K	1.5" Square Drive w/reaction device	10,000
AHCTS-025K	2" Square Drive w/reaction device	25,000

Please refer to Configuration Options on following page for required ordering options.

Optional Pelican Case shown
(ordered separately)



25503

AUDITOR HIGH-CAPACITY TEST STANDS

AHCTS Series High Capacity Test Stands for Rotary and Hydraulic Tools Configuration Options

Base Model Number	Display	Legs	Base Size	Rundown Fixture Capacity (ft-lb)	Reaction Post	Casters	Articulated Arm and Mount	Digital Module
AHCTS-xxxx	1 = ATDA 2 = No Embedded Display 3 = ATDA-DC 4 = ATDA-8000 Digital (7") 5 = ATDA-8000-10 Digital 6 = Standard Embedded Display (1, 3, 4, 5 include articulated arm)	1 = 6" 2 = No legs (Standard) 3 = 18" 4 = Custom	0 = 8 x 8" 1 = 12 x 12" 3 = 14 x 19" (Standard) 4 = 18 x 24" 5 = 18 x 36" 6 = NA	1 = 500 2 = No 3 = 1,000 4 = 2,500 5 = 5,000 6 = 7,500 7 = 1.5" Kit Max. capacity 7,500 Ft-Lb 8 = 2.5" Kit Max. capacity 7,500 Ft-Lb	1 = Single 6" Post and Paddles 2 = No 3 = Multiple Posts 6" 4 = Paddles 5 = Custom 6 = Single 9" Post and Paddles 7 = Multiple Posts 9"	1 = Yes 2 = No	1 = Yes 2 = No	1 = Yes (for Tablet or PC direct) 2 = No
Model Number Digits 1-10	Model # Digit 11	Model # Digit 12	Model # Digit 13	Model # Digit 14	Model # Digit 15	Model # Digit 16	Model # Digit 17	Model # Digit 18

Auditor High Capacity Test Stand for Rotary Tools

AHCTS-0500 680 Nm / 500 ft-lb			0, 1, or 3					
AHCTS-1000 1,360 Nm / 1,000 ft-lb			0, 1, or 3					
AHCTS-2500 3,400 Nm / 2,500 ft-lb			0, 1, or 3					
AHCTS-5000 6,800 Nm / 5,000 ft-lb			0, 1, or 3					
AHCTS-7500 10,200 Nm / 7,500 ft-lb			0, 1, or 3					

Auditor High Capacity Test Stand for Hydraulic Tools

AHCTS-0.5K 680 Nm / 500 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-001K 1,360 Nm / 1,000 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-2.5K 3,390 Nm / 2,500 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-005K 6,800 Nm / 5,000 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-010K 13,600 Nm / 10,000 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-025K 34,000 Nm / 25,000 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-050K 68,000 Nm / 50,000 ft-lb			0-5 (3-5 come with casters)	2				

AUDITOR HIGH-CAPACITY TEST STANDS

AIMTS TEST STAND FOR IMPACT TOOLS

Obtain accurate test results with the AIMTS Series Impact Test Stand. When used with an Auditor ATDA Analyzer or AUET/MTM Desktop Torque Tester, the tool's performance data can be recorded and stored. Each Auditor Analyzer comes standard with PC-based software to store and organize data for use within a quality system. It is necessary to bolt the AIMTS to a bench. We also recommend that a rundown fixture always be used for testing impacts.



AIMTS-0500
Test stand for
small impact tools



AIMTS-2000
Test stand for large impact tools

MODEL	DESCRIPTION
AIMTS-0500	3/4" square drive impact test stand
AIMTS-2000	1.5" square drive impact test stand

Refer to Configuration Options below for required ordering options.

AIMTS Series High Capacity Impact Test Stand Configuration Options

Base Model #	Display	Legs	Base Size	Rundown Fixture Capacity (ft-lb)*		Options	Digital Module
AIMTS-xxxx	1 = ATDA 2 = No Embedded Display 3 = ATDA-DC 4 = ATDA-8000 Digital (7") 5 = ATDA-8000-10 Digital	1 = 6" 2 = No legs (Standard) 3 = 18" 4 = Custom	6 = Bench Stand	1 = 500 2 = No 3 = 2,000 4 = 50 5 = 5,000	6 = 10,000 7 = 20,000 8 = 250 9 = 2,500	Not available for AIMTS test stands. Enter 222 for model # digits 15-17	1 = Yes (for Tablet or PC direct) 2 = No
Model Number Digits 1-10	Model Number Digit 11	Model Number Digit 12	Model Number Digit 13	Model Number Digit 14		Model Number Digits 15-17	Model Number Digit 18
AIMTS-0050 68 Nm / 50 ft-lb		2	6			222	
AIMTS-0250 340 Nm / 250 ft-lb		2	6			222	
AIMTS-0500 680 Nm / 500 ft-lb		2	6			222	
AIMTS-2000 2,720 Nm / 2,000 ft-lb		2	6			222	
AIMTS-2500 3,390 Nm / 2,500 ft-lb		2	6			222	
AIMTS-5000 6,780 Nm / 5,000 ft-lb		2	6			222	

* Ordering more than one rundown fixture is highly recommended if you're doing a lot of testing. Having multiple rundown fixtures ensures that you have spares when dealing with heat issues. AIMTS test stands are available in capacities of up to 20,000 ft-lb. Capacities other than what is shown here are quoted separately. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

AUDITOR HIGH-CAPACITY TEST STANDS



AHBTS-2500
Auto Release test stand for quickly testing large rotating tools

AHBTS TEST STAND WITH BRAKING SYSTEM FOR ROTATING TOOLS

These test stands are for testing rotating tools without requiring the use of rundown fixtures. We utilize an airbrake for testing tools that cannot or should not be used in reverse. These test stands are compatible with any Auditor Torque Analyzer.

MODEL	DESCRIPTION
AHBTS-2500	1.5" square drive, brake system w/reaction device, rotary transducer and display
AHBTS-5000	1.5" square drive, brake system w/reaction device, rotary transducer and display

Refer to Configuration Options below for required ordering options.

AHBTS Series High Capacity Test Stand with Brake System Configuration Options

Base Model Number	Display	Legs	Base Size	Rundown Fixture Capacity (ft-lb)	Reaction Post	Casters	Articulated Arm and Mount	Digital Module
AHBTS-xxxx	4 = ATDA-8000 Digital (7") 5 = ATDA-8000-10 Digital (Requires Display Controller)	1 = 6" 2 = No legs (Standard) 3 = 18" 4 = Custom	0 = 8 x 8" 1 = 12 x 12" 3 = 14 x 19" (Standard) 4 = 18 x 24" 5 = 18 x 36" 6 = NA	2 = No	1 = Single Post 2 = No 3 = Multiple Posts 6" 5 = Custom 6 = Single Post 9" 7 = Multiple Posts 9"	1 = Yes 2 = No	1 = Yes 2 = No	1 = Yes 2 = No (For Tablet or PC Direct)
Model # Digits 1-10	Model # Digit 11	Model # Digit 12	Model # Digit 13	Model # Digit 14	Model # Digit 15	Model # Digit 16	Model # Digit 17	Model # Digit 18
AHBTS-2500 3,400 Nm / 2,500 ft-lb				2				
AHBTS-5000 6,800 Nm / 5,000 ft-lb				2				

AUDITOR TORQUE WRENCHES

TORQUE MEASUREMENT: TORQUE WRENCH

Features and Benefits

- Multiple Options from Simple to Sophisticated
- Similar Interface with other Auditor Products
- Durable



	ADW	ADW-DC	APTW	ATW	MOMENT ALPHA
	* Auditor Digital Wrench	* Auditor Digital Wrench with Data Collection	Auditor Preset Torque Wrench	Auditor Torque Wrench	Digital Wrench with Torque & Angle
Torque Range	10 - 500 Nm 7 - 370 ft-lb	10 - 500 Nm 7 - 370 ft-lb	5 - 340 Nm 4 - 250 ft-lb	5 - 200 Nm 4 - 148 ft-lb	Screwdriver: 0.5 - 5 Nm 0.4 - 3.7 ft-lb Wrench: 4 - 1,000 Nm 3.0 - 738 ft-lb Click: 5 - 340 Nm 3.7 - 251 ft-lb
	Digital wrench with multiple head options for line side testing/auditing	Data-collecting digital wrench with multiple head options for line side testing/auditing	Interchangeable heads. Preset uses proprietary adjustment tool to guard against unauthorized setting changes	Transducer on a stick. Communicates with data collecting testers and analyzers	Ensure accuracy in quality QR production applications. Wifi/Bluetooth delivery
Bi-Directional accuracy of +/- X of indicated reading within the top 90% of the tester's capacity	1%	1%	3%	0.50%	±4%
Open Protocol					X
Mechanical Click Data Collection					X
Software Included	X	X			X

USED IN CONJUNCTION WITH

ATDA(DC) Data Analyzer				X	
AUET(DC) Tester				X	
AUET/MTM(DC) Tester				X	

TORQUE WRENCH LOADERS



For Calibration of all types of torque wrenches eliminating human variable for more accurate measurement - digital transducer used with ATDA-8000-10-DCA

ATWL-250	Torque range up to 340 Nm / 250 ft-lb
ATWL-750	Torque range up to 1,020 Nm / 750 ft-lb
ATWL-1000	Torque range up to 1,360 Nm / 1,000 ft-lb

AUDITOR DIGITAL WRENCH SERIES



ADW-0010K111312222



ADW-1400F125312222

ADW DATA COLLECTING TORQUE WRENCH

- Large memory capacity
- Every torque value has associated trace file
- “Pick a Point” and “Move On” feature
- Barcode scanner
- Alpha Numeric screen for entering text
- Field replaceable batteries
- Docking station connection
- Serial connection
- Battery charger connection
- Ergonomic handle
- Switch between measure and data collection modes at any time
- Multiple files and route capability
- Data memory and simple statistics “On Board”
- Complete statistical analysis, data archiving and exporting in Audit Manager software
- Five models standard ranges 10 - 500 Nm full scale
- Torsion transducer — not length dependent
- Transducer is replaceable
- 1,400 Nm model uses different handle design

MODEL	TORQUE RANGE		WEIGHT		OVERALL LENGTH		SQ. DRIVE
	NM	FT-LB	LB	KG	IN	MM	IN
ADW-0010K	1 - 10	0.7 - 7.4	2.2	1	18	457.2	1/4
ADW-0075K	7.5 - 75	5.5 - 55	3.1	1.4	23.5	596.9	3/8
ADW-0180K	18 - 180	13 - 130	3.6	1.6	30.1	765.2	1/2
ADW-0270K	27 - 270	20 - 198	3.6	1.6	30.1	765.2	3/4
ADW-0500K	50 - 500	37 - 369	4	1.8	36	914	1
ADW-1400F	140 - 1,400	103 - 1,033	4.8	2.2	60	1,524	1

Unit accuracy is $\pm 1.0\%$ FSD of indicated reading for the top 95% of full scale as indicated above. Each model includes a case, a battery charger, and a standard square-drive head. Other heads are available at additional cost.

*Part numbers with K, D or F followed by a 1 designate models with file and route capability. K followed by 2 indicate sequential memory but no file capability.

Part numbers with K, D or F followed by a 1,1 indicate file and route with bar code and docking station capability. K, D or F followed by a 1,2 indicate file and route capability with serial port only. Please refer to the Configuration Options table on following page for required ordering options.

AUDITOR DIGITAL WRENCH SERIES

ADW Series Digital Torque Wrenches Configuration Options

Base Model Number	Style	Data Collector	Bar Code and Docking Station	Square Drive Size	Type of Transducer	Engineering Unit	Future Options
ADW-xxxx	K = Katana D = Katana with Dovetail Transducer F = Straight Stick	1 = Yes 2 = No	1 = Yes 2 = No (Serial Port Only)	1 = 1/4" 2 = 3/8" 3 = 1/2" 4 = 3/4" 5 = 1" 6 = N/A	1 = Intellect 2 = Industrial Standard 3 = N/A	1 = Nm 2 = Ft-lb 3 = In-lb	Not yet available. Enter 2222 for model # digits 15-18
Model # Digits 1-8	Model # Digit 9	Model # Digit 10	Model # Digit 11	Model # Digit 12	Model # Digit 13	Model # Digit 14	Model # Digits 15-18

Non Data-Collecting (Sequential Memory)

ADW-0010K2 10 Nm / 7.4 ft-lb	K or D	2	2	1 or 2	3	1	2222
ADW-0075K2 75 Nm / 55 ft-lb	K or D	2	2	2	3	1	2222
ADW-0180K2 180 Nm / 130 ft-lb	K or D	2	2	3	3	1	2222
ADW-0270K2 270 Nm / 198 ft-lb	K or D	2	2	3	3	1	2222
ADW-0500K2 500 Nm / 369 ft-lb	K or D	2	2	4	3	1	2222
ADW-1000K2 1,000 Nm / 738 ft-lb	F	2	2	4 or 5	3	1	2222
ADW-1200K2 1,200 Nm / 885 ft-lb	F	2	2	5	3	1	2222
ADW-1000K2 1,400 Nm / 1,033 ft-lb	F	2	2	5	3	1	2222
ADW-1200K2 2,000 Nm / 1,475 ft-lb	F	2	2	5	3	1	2222

Data Collecting (File and Route Capability)

ADW-0010K1 10 Nm / 7.4 ft-lb		1		1 or 2	3	1	2222
ADW-0075K1 75 Nm / 55 ft-lb		1		2	3	1	2222
ADW-0180K1 180 Nm / 130 ft-lb		1		3	3	1	2222
ADW-0270K1 270 Nm / 198 ft-lb		1		3	3	1	2222
ADW-0500K1 500 Nm / 369 ft-lb		1		4	3	1	2222
ADW-1000K2 1,000 Nm / 738 ft-lb	F			4 or 5	3	1	2222
ADW-1200K2 1,200 Nm / 885 ft-lb	F			5	3	1	2222
ADW-1000K2 1,400 Nm / 1,033 ft-lb	F			5	3	1	2222
ADW-1200K2 2,000 Nm / 1,475 ft-lb	F			5	3	1	2222

Standard capacities shown. Additional capacities available on request. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

AUDITOR ELECTRONIC TORQUE WRENCHES

ALLOW PRECISE TIGHTENING AND AUDITING OF YOUR ASSEMBLY APPLICATIONS

“TRANSDUCERS ON A STICK”

- Non-Length Dependent – Where the operator’s hand is positioned during use has no effect on torque readings
- Available in Industry Standard (IS) or Intelligent (Intellect) Configurations – Transducer is compatible with a wide variety of IS style instruments or Auditor Intellect instruments that self recognize the transducer
- Durable – Steel, Aluminum and Carbon Fiber construction provide optimal strength and weight. Transducer supplied with overload capacity of 150% of full scale
- Accurate – Torque readings are accurate to 1% of indicated reading in top 95% of full scale



MODEL	TORQUE RANGE		SQUARE DRIVE
	NM	FT-LB	IN
ATW-0100F	14 - 136	10 - 100	3/8
ATW-0200F	27 - 272	20 - 200	1/2
ATW-0500F	68 - 680	50 - 500	3/4
ATW-1000F	136 - 1,360	100 - 1,000	1

Required Accessory: ATDBRIS IS cable to connect Auditor ATDA instrument.

The Auditor logo features the word "AUDITOR" in a bold, italicized, sans-serif font. Above the letters "UDITOR", there are three horizontal lines of increasing length, with a small circle at the end of the longest line, resembling a stylized torque wrench or a signal icon. A trademark symbol (TM) is located to the upper right of the logo.

AUDITOR PRESET TORQUE WRENCHES

Auditor's APTW preset wrenches provide a flexible, easy way to audit fastener torque. A wide range of interchangeable heads provide flexibility and convenience.

FEATURES AND BENEFITS

- Easy-to-use preset wrenches for fastener torque auditing
- Torque ranges from 5 – 340 Nm
- User friendly, sleek, ergonomic design
- Tactile feedback on achievement of preset torque
- Proprietary adjustment tool guards against unauthorized setting changes
- Wide range of interchangeable heads provide flexibility and convenience
- +/- 3% accuracy when used in clockwise or counterclockwise directions



WRENCH MODEL	TORQUE RANGE	INSERT ACCEPTED
APTW-25	5 – 25 Nm	12 mm
APTW-50	10 – 50 Nm	12 mm
APTW-100	20 – 100 Nm	12 mm
APTW-150	30 – 150 Nm	12 mm
APTW-200	40 – 200 Nm	14 mm
APTW-340	60 – 340 Nm	14 mm


TORQUE WRENCH INSERTS


ADAPTERS	DESCRIPTION
 APTH-12ADP	9 x 12 M to 14 x 18 F
 APTH-14ADP	14 x 18 M to 9 x 12 F

RING END INSERTS	DESCRIPTION
 APTH-12RE50	1/2" Ring End, 12 mm
 APTH-14RE32	32 mm Ring End, 14 mm

SQUARE DRIVE INSERTS	DESCRIPTION
9 x 12	
 APTH-12SD25	1/4" Sq. Dr.
 APTH-12SD38	3/8" Sq. Dr.
 APTH-12SD50	1/2" Sq. Dr.
14 x 18	
 APTH-14SD50	1/2" Sq. Dr.

BLANK END INSERTS	DESCRIPTION
 APTH-12BLANK	12 mm
 APTH-14BLANK	14 mm

RATCHET HEADS	DESCRIPTION
9 x 12	
 APTH-12RT25	1/4" Sq. Dr.
 APTH-12RT38	3/8" Sq. Dr.
 APTH-12RT50	1/2" Sq. Dr.
14 x 18	
 APTH-14RT50	1/2" Sq. Dr.
 APTH-14RT34	3/4" Sq. Dr.

OPEN END HEAD INSERTS							
9 x 12				14 x 18			
MODEL	DESCRIPTION	MODEL	DESCRIPTION	MODEL	DESCRIPTION	MODEL	DESCRIPTION
	APTH-120E7	7 mm OE		APTH-140E1	1" OE	APTH-140E25	25 mm OE
	APTH-120E8	8 mm OE		APTH-140E13	13 mm OE	APTH-140E27	27 mm OE
	APTH-120E9	9 mm OE		APTH-140E14	14 mm OE	APTH-140E30	30 mm OE
	APTH-120E10	10 mm OE		APTH-140E15	15 mm OE	APTH-140E32	32 mm OE
	APTH-120E11	11 mm OE		APTH-140E16	16 mm OE	APTH-140E34	34 mm OE
	APTH-120E12	12 mm OE		APTH-140E17	17 mm OE	APTH-140E36	36 mm OE
	APTH-120E13	13 mm OE		APTH-140E18	18 mm OE	APTH-140E38	38 mm OE
	APTH-120E14	14 mm OE		APTH-140E19	19 mm OE	APTH-140E41	41 mm OE
	APTH-120E15	15 mm OE		APTH-140E21	21 mm OE	APTH-140E118	1-1/8" OE
	APTH-120E16	16 mm OE		APTH-140E22	22 mm OE	APTH-140E138	1-3/8" OE
	APTH-120E17	17 mm OE		APTH-140E24	24 mm OE		
	APTH-120E18	18 mm OE					
	APTH-120E19	19 mm OE					
	APTH-120E20	20 mm OE					
	APTH-120E50	1/2" OE					

MOMENT ALPHA DIGITAL TORQUE WRENCH

ULTIMATE FLEXIBILITY

ENSURE ACCURACY IN QUALITY OR PRODUCTION APPLICATIONS

Moment Alpha is a modular digital wrench/torque system that ensures accurate, measurable tightening every time. Designed for both torque and angle measurement, the system can be used in both quality and production applications.

The Moment Alpha wrench is now available with Open Protocol, which allows instant data transfer to the plant network. Production and Quality audit results can be sent on the network after each event, and PLC logic can be developed to communicate signals to I/Os.



With the introduction of the new Mechanical Click system, Moment Alpha offers increased functionality. Quick and easy torque validation with data collection to ensure accurate rundowns on critical joints.


FEATURES

- Torque and angle measurement
- Modular system with automatic detection of accessories
- Bluetooth communication between wrench and controller
- Now available with Open Protocol
- One wrench/tablet analyzer to perform audits in full torque range from 0.5 – 1,000 Nm (with optional accessories)
 - Screwdriver mode from 0.5 – 5 Nm
 - Flexion mode (wrench) from 4 – 1,000 Nm
- Works in both clockwise and counter-clockwise operation
- Click wrench option provides tactile and audible feedback, as well as double hit and overshoot detection
- Uses standard drive adapters
- Data collection with Data storage of 50,000 readings and 1,000 traces
- Rechargeable battery pack for wrench handle

• Open Protocol
• Mechanical Click Extensions



Portable Controller



Bench-Mount Controller
AC Power

Extensions



20 – 100 Nm

40 – 200 Nm

60 – 300 Nm

80 – 400 Nm

120 – 600 Nm

200 – 1,000 Nm

5 – 150 Nm Click

40 – 340 Nm Click

MOMENT ALPHA DIGITAL TORQUE WRENCH

WRENCH HANDLE



WRENCH HANDLE	TORQUE RANGE	LENGTH	WEIGHT	TORQUE TRANSDUCER ACCURACY	TIGHTENING ACCURACY	ANGLE TRANSDUCER ACCURACY
CPSKV00	Screwdriver Mode: 0.5 - 5 Nm Wrench Mode: 4 - 40 Nm (requires CPSJP81 adapter) 4 - 1,000 Nm (with appropriate extension*)	7.9" 200 mm	0.82 lb 0.37 kg	ISO 6789 < 1%	< ±4%	±1%

* Wrench handle supplied with one battery. Specific extensions for specific torques available separately. Contact an AIMCO Customer Service Associate, 1-503-254-6600 or toll free 1-800-852-1368.

CONTROLLERS



Portable Controller



Bench-Mount Controller
AC Power

FEATURES

- Preset tightening settings
- Audible alarm
- Four tightening modes: Torque, Angle, Torque and Angle Monitoring, Angle and Torque Monitoring
- 7" color display touchscreen
- International units: Nm, kg/m, kp/m, ft-lb, in-lb, ft-oz, in-oz
- Sturdy and suited to industrial environments
- For greater flexibility, software is interchangeable between bench-mount and portable models
- Portable controller comes with a protective screen, rugged case, and carrying strap

DESCRIPTION	SIZE	WEIGHT
Portable Controller	7.1" x 13.8" x 5.9" 180 x 350 x 150 mm	1.05 lbs 0.5 kg
Bench-Mount Controller	8.7" x 5.4" x 1.3" 221 x 138 x 32 mm	7.05 lbs 3.2 kg

MOMENT ALPHA DIGITAL TORQUE WRENCH

CHOOSE YOUR SYSTEM

1) Start with the Basics

All Moment Alpha systems start with a basic kit.

CPSKV01 Basic Kit

MODEL	DESCRIPTION		
CPSKV00	Wrench Handle		
CPSJP75	Battery Unit for Handle (includes 3 rechargeable AA batteries)		
CPSJP73	Battery Charger		
CPSJP81	Adapter 4 - 40 Nm	Length: 3.5" / 89 mm	Weight: 0.03 lb / 0.01 kg



2) Choose Your Controller and Software

Either the portable or bench-mount controller type can be selected for either the Production or Quality systems. For software options, contact an AIMCO Customer Service Associate, 1-503-254-6600, or toll free 1-800-852-1368.

BENCH-MOUNT CONTROLLER



MODEL	INSTALLED SOFTWARE
CPSKMA-B.PS	Production Start Software
CPSKMA-B.QS	Quality Start Software
CPSKMA-B.QP	Quality Premium Software
CPSKMA-B.PPOP	Production Premium Software with Open Protocol
CPSKMA-B.QPOP	Quality Premium Software with Open Protocol

PORTABLE CONTROLLER



MODEL	INSTALLED SOFTWARE
CPSKMA-P.PS	Production Start Software
CPSKMA-P.QS	Quality Start Software
CPSKMA-P.QP	Quality Premium Software
CPSKMA-P.PPOP	Production Premium Software with Open Protocol
CPSKMA-P.QPOP	Quality Premium Software with Open Protocol

3) Choose Your Extensions

AIMCO offers a variety of extensions to meet all of your application needs.



CPSK93
40 Nm Mini
Adapter

CPSK90
60 Nm Adapter

EXTENSIONS

MODEL	DESCRIPTION	LENGTH	END EFFECTOR CONNECTION	WEIGHT
CPSKS86	Extension 20 - 100 Nm	5.71" / 145 mm	14 x 18*	0.06 lb / 0.03 kg
CPSKS81	Extension 40 - 200 Nm	14.41" / 366 mm	14 x 18*	1.1 lb / 0.5 kg
CPSKS85	Extension 60 - 300 Nm	27.06" / 688 mm	14 x 18*	2.6 lb / 1.2 kg
CPSKS87	Extension 80 - 400 Nm	30.27" / 769 mm	14 x 18*	3.08 lb / 1.4 kg
CPSKS82	Extension 120 - 600 Nm	42.72" / 1,085 mm	14 x 18*	5.07 lb / 2.3 kg
CPSKS98	Extension 200 - 1,000 Nm	70.86" / 1,800 mm	1"	5.07 lb / 2.3 kg

CLICK EXTENSIONS

MODEL	DESCRIPTION	LENGTH	END EFFECTOR CONNECTION	WEIGHT
CPSPH05	Extension 5 - 25 Nm	6.85" / 174 mm	9 x 12*	1.15 lb / 0.5 kg
CPSPH10	Extension 10 - 50 Nm	9.21" / 234 mm	9 x 12*	1.4 lb / 0.6 kg
CPSPH20	Extension 20 - 100 Nm	12.09" / 307 mm	9 x 12*	1.65 lb / 0.7 kg
CPSPH30	Extension 30 - 150 Nm	15.59" / 396 mm	9 x 12*	1.85 lb / 0.8 kg
CPSPH40	Extension 40 - 200 Nm	17.83" / 453 mm	14 x 18*	3.5 lb / 1.6 kg
CPSPH60	Extension 60 - 340 Nm	21.30" / 541 mm	14 x 18*	4.3 lb / 2.0 kg

END EFFECTOR ADAPTERS

MODEL	DESCRIPTION	LENGTH	END EFFECTOR CONNECTION	WEIGHT
CPSK93	Mini Adapter 4 - 40 Nm + Detection	1.9" / 49 mm	Adapts 14 x 18 to 9 x 12	-
CPSK90	Adapter 6 - 60 Nm + Detection	3.8" / 96 mm	Adapts 14 x 18 to 9 x 12	-

* End Effectors sold separately. Contact an AIMCO Customer Service Associate, 1-800-852-1368.

ITVC TORQUE CART



AIMCO's iTVC Torque Cart is designed for "lineside" or "point of use" tool validation and calibration. Our torque carts allow testing of tools on repeatable joint simulators and "in process" use on production joints, allowing users to identify process capability. Multiple torque cart configurations are available with simple to sophisticated options:

- Manual push carts equipped with simple torque testers
- Manual push carts equipped with data collectors and database application software
- Self propelled cart with computer and relational database application
- Driven cart with computer and relational database application



FEATURES AND BENEFITS

- For testing on repeatable joint simulators or actual production joints
- Mobile test carts can be configured for testing continuous and discontinuous drive tools, including DC electric, clutch, battery, impulse, and torque wrenches
- Each cart is customizable to meet testing needs from 1–1,400 Nm
- Hydraulic braking systems available as an option where linear control of a braking ramp is desired and/or to eliminate the need to reverse each rundown
- Data management software options are available to suit specific audit or asset-tracking needs
- Torque wrench loaders are configurable to suit wrench populations

Carts can be equipped to specific customer requirements. Ancillary test stands up to 50,000 ft-lb available. Contact an AIMCO Customer Service Associate for a quote or for more details, 1-503-254-6600, or toll free 1-800-852-1368.



		LOW TORQUE		HIGH TORQUE				
		MODEL	DESCRIPTION	NM	FT-LB	NM	FT-LB	
UFT	Mobile-Powered							
	iTVC.A	Torque Cart, UFT Mobile BASE#						
	iTVC.A2XXXXXX	NO JOINTS	0	0	0	0		
	iTVC.A2XBCXXX	2 UFTs	15	11	190	140		
	iTVC.A2XBCDXX	3 UFTs	15	11	686	506		
	iTVC.A2ABCDXX	4 UFTs	1	0.7	686	506		
	iTVC.A2ABCDEP	4 UFTs, 1 AJKR, Printer	1	0.7	1,400	1,033		
	Manual							
	iTVC.A1XXXXXX	Torque Cart, UFT Manual BASE#						
	iTVC.A1XBCXXX	2 UFTs	15	11	190	140		
	iTVC.A1XBCDXX	3 UFTs	15	11	686	506		
	iTVC.A1ABCDXX	4 UFTs	1	0.7	686	506		
	iTVC.A1ABCXEX	3 UFTs, 1 AJKR	1	0.7	1,400	1,033		
	iTVC.A1ABCDEP	4 UFTs, 1 AJKR	1	0.7	1,400	1,033		
AJKR	Mobile-Powered							
	iTVC.B2XXXXXX	Torque Cart, AJKR Mobile BASE#						
	iTVC.B2XBCXX	2 JOINTS	27	20	271	200		
	iTVC.B2XBCEX	3 JOINTS	27	20	1,400	1,033		
	iTVC.B2ABCEP	4 JOINTS	6	4.4	1,400	1,033		
	Manual							
	iTVC.B1XXXXXX	Torque Cart, AJKR Manual BASE#						
	iTVC.B1XBCXX	2 JOINTS	27	20	271	200		
	iTVC.B1XBCEX	3 JOINTS	27	20	1,400	1,033		
	iTVC.B1ABCEP	4 JOINTS	6	4.4	1,400	1,033		
BASE	Mobile-Powered							
	iTVC.X2X	CART, NO COMPUTER	—	—	—	—		
	iTVC.X2A	CART, W/COMPUTER	—	—	—	—		
	Manual							
	iTVC.X1X	CART, NO COMPUTER	—	—	—	—		
	iTVC.X1A	CART, W/COMPUTER	—	—	—	—		

TRANSDUCERS

TORQUE MEASUREMENT: TRANSDUCERS

Features and Benefits

Superior:

- Accuracy
- Compatibility
- Durability

Auditor offers multiple styles of transducers in various configurations. Industry standard transducers (2mv/v) and intellect transducers for Auditor instruments that reduce configuration set up time.

Used in Conjunction with Analyzer

	Rotary	Stationary	
			
	ARTIS	ASTIS	AISI - AISF*
	Auditor Rotary Transducer Industry Standard	Auditor Stationary Transducer Industry Standard	Auditor Industry Standard Stationary
ATC	X		
AUET	X		
AUET/MTM	X	X	X
ATDA	X	X	X
ATDA-8000			X

* See Configuration Options on following page to configure complete part number for AISI / AISF models. Please contact an AIMCO Customer Service Associate for additional information, 1-503-254-6600, or toll free 1-800-852-1368.

AUDITOR ROTARY TRANSDUCERS

Suitable for use with all continuous drive tools, impulse tools and torque wrenches.



ARTIS Series

MODEL	DRIVE	MAX TORQUE		WEIGHT
	IN	NM	IN-LB/FT-LB	LB
ARTIS-25H-2T(A)	1/4 Hex	2	18 in-lb	1.0
ARTIS-25H-5T(A)	1/4 Hex	5	44 in-lb	1.0
ARTIS-25H-10T(A)	1/4 Hex	10	88 in-lb	1.0
ARTIS-25H-20T(A)	1/4 Hex	20	180 in-lb	1.0
ARTIS-25S-10T(A)	1/4 Sq.	10	88 in-lb	1.0
ARTIS-25S-20T(A)	1/4 Sq.	20	180 in-lb	1.0
ARTIS-38S-25T(A)	3/8 Sq.	25	225 in-lb	1.2
ARTIS-38S-75T(A)	3/8 Sq.	75	50 ft-lb	1.2
ARTIS-50S-180T(A)	1/2 Sq.	180	130 ft-lb	1.5
ARTIS-75S-250T(A)	3/4 Sq.	250	180 ft-lb	2.2
ARTIS-75S-500T(A)	3/4 Sq.	500	370 ft-lb	2.2
ARTIS-100S-750T(A)	1 Sq.	750	553 ft-lb	4.0
ARTIS-100S-1400T(A)	1 Sq.	1400	1,025 ft-lb	4.0

*Add "A" to the end of the part number to indicate torque/angle transducer.

AUDITOR™

TRANSDUCERS

AUDITOR STATIONARY TRANSDUCERS

Stationary Transducers with joint rundown fixtures and, where applicable, bench stands.



ASTIS

ASTIS industry standard transducers can be used with multiple analyzers.

MODEL	MAX TORQUE		DRIVE IN
	NM	IN-LB/FT-LB	
ASTIS-25D-11	11	100 in-lb	1/4
ASTIS-25D-28	28	250 in-lb	1/4
ASTIS-38D-135	135	100 ft-lb	3/8
ASTIS-50D-270	270	200 ft-lb	1/2
ASTIS-75D-1000	1017	750 ft-lb	3/4
ASTIS-100D-1700	1,695 Nm	1,250 ft-lb	1



AISI

AISI / AISF Transducers connect to the AUET/MTM, ATDA, and ATDA-8000 analyzers and mount directly to a benchtop.

MODEL*	MAX TORQUE		WEIGHT		W X H X D		DRIVE IN
	NM	IN-LB/FT-LB	KG	LB	MM	IN	
AISI-200025	2.8	25 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25	1/4
AISI-200100	11.3	100 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25	1/4
AISI-200500	56.5	500 in-lb	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25	3/8
AISF-200100	135.6	100 ft-lb	2.25	5	100 x 65	4 x 3	1/2
AISF-200250	339	250 ft-lb	2.25	5	100 x 65	4 x 3	1/2
AISF-201000	1,350	1,000 ft-lb	2.8	6	100 x 65	4 x 3	1

* See Configuration Options below to configure complete part number for AISI / AISF models.

Auditor AISI / AISF Industry Standard Transducers Configuration Options

Base Model #	Angle	Capacity	Configuration	Expanded Range*	Digital	Drive Size	Wireless
Model # Digits 1-5	2 = No Model # Digit 6	00025 = 25 In-Lb / 25 Ft-Lb 00050 = 50 In-Lb / 50 Ft-Lb 00100 = 100 In-Lb / 100 Ft-Lb 00250 = 250 In-Lb / 250 Ft-Lb 00350 = 350 In-Lb / 350 Ft-Lb 00500 = 500 In-Lb / 500 Ft-Lb 00600 = 600 In-Lb / 600 Ft-Lb 00750 = 750 In-Lb / 750 Ft-Lb 01000 = 1,000 In-Lb / 1,000 Ft-Lb Model # Digits 7-11	1 = Bench Stand 2 = Inline 3 = Loader (1000 Series Only) Model # Digit 12	1 = Yes 2 = No Model # Digit 13	1 = Yes 2 = No Model # Digit 14	1 = 1/4" Hex (up to 100 In-Lb / 8.3 Ft-Lb) 2 = 1/4" Sq. (up to 100 In-Lb / 8.3 Ft-Lb) 3 = 3/8" Sq. (150-500 In-Lb / 12.5-41.7 Ft-Lb) 4 = 1/2" Sq. (1,800-3,000 In-Lb / 150-250 Ft-Lb) 5 = 3/4" Sq. (3,000-12,000 In-Lb / 250-1,000 Ft-Lb) 6 = 1" Sq. (12,000-24,000 In-Lb / 1,000-2,000 Ft-Lb) 7 = 1-1/2" Sq. (24,000+ In-Lb / 2,000+ Ft-Lb) Model # Digit 15	2 = No Model # Digit 16
Stationary							
AISI- (in-lb capacities)	2						2
AISF- (ft-lb capacities)	2						2

*Standard range is 10%-100% of maximum capacity. Expanded range is 5%-100% of maximum capacity.

Transducers are available in capacities of up to 10,000 Ft-Lb. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

RUNDOWN FIXTURES

TORQUE MEASUREMENT: RUNDOWN FIXTURES

Features and Benefits

- Enables accurate and repeatable testing of pneumatic or electric power tools
- Mechanical Belleville system of bolt, nut or nut body, Belleville washers and main housing, 1/4" - 3/4" drive sizes, 10 in-lb - 1,200 ft-lb
- Fixtures can be ordered to simulate hard, med., or soft joints

				
	ARDFA-XXXXHD ARDIA-XXXHD	ARDFA-XXXHDS ARDIA-XXXHDS	ARDFA-XXXHDE ARDIA-XXXHDE	ARDFA-XXX ARDIA-XXX
Wear-Resistant Heavy Duty	X			
Heavy Duty, Fully Encapsulated		X		
Heavy Duty, Encapsulated Washers			X	
Standard (Included w/analyzer)				X
Spline Drive				
Used in Conjunction with External Transducer				
ASTIS	X	X	X	X
AISI / AISF	X	X	X	X
ARTIS	X	X	X	X

*Spline drive feature provides rundown control when testing pulse tools.



AUDITOR RUNDOWN FIXTURES

To test power tools, pneumatic or electric, consistent rotational speed must be achieved. The joint rundown fixture/simulator provides the means by which the tool motor and spindle rotates freely at the start of the test cycle and then develops torque as rotation resistance increases as fastener/joint load increases. The linearity and consistency of the joint rundown fixtures/simulators vary greatly and the tool test data is a product of the variations in these rundown fixtures. Higher quality joint rundown fixtures produce torque data with less scatter.

ARDIA Models

MODEL*	RECOMMENDED TORQUE RANGE		SQUARE DRIVE
	NM	IN-LB	
ARDIA-10(HD)(HDE)(HDS)	.13 - 1.13	1.0 - 10	1/4"
ARDIA-25(HD)(HDE)(HDS)	.28 - 2.8	2.5 - 25	1/4"
ARDIA-50(HD)(HDE)(HDS)	.56 - 5.6	5 - 50	1/4"
ARDIA-100(HD)(HDE)(HDS)	1.3 - 11.3	10 - 100	1/4"
ARDIA-150(HD)(HDE)(HDS)	1.7 - 16.9	15 - 150	1/4"
ARDIA-250(HD)(HDE)(HDS)	2.8 - 28.3	25 - 250	3/8"
ARDIA-350(HD)(HDE)(HDS)	4 - 40	35 - 350	3/8"
ARDIA-500(HD)(HDE)(HDS)	5.6 - 56.5	50 - 500	3/8"
ARDIA-750(HD)(HDE)(HDS)	8.5 - 84.7	75 - 750	3/8"
ARDIA-1000(HD)(HDE)(HDS)	11.3 - 113	100 - 1,000	3/8"

*Add "HD" to part numbers for wear resistant models. Add "HDS" to part numbers for fully encapsulated wear resistant models.

*Add "HDE" to part numbers for partial encapsulated wear resistant models.

ARDFA Models

MODEL*	RECOMMENDED TORQUE RANGE		SQUARE DRIVE
	NM	FT-LB	
ARDFA-100(HD)(HDE)(HDS)	13.6 - 136	10 - 100	1/2"
ARDFA-150(HD)(HDE)(HDS)	20.4 - 204	15 - 150	1/2"
ARDFA-250(HD)(HDE)(HDS)	34 - 340	25 - 250	1/2"
ARDFA-500(HD)(HDE)(HDS)	67.8 - 678	50 - 500	3/4"
ARDFA-600(HD)(HDE)(HDS)	81.6 - 816	60 - 600	3/4"
ARDFA-750(HD)(HDE)(HDS)	101.7 - 1,017	75 - 750	3/4"

* Add "HD" to part numbers for wear resistant models. Add "HDS" to part numbers for encapsulated wear resistant models.

* Add "HDE" to part numbers for partial encapsulated wear resistant models.

JOINT KITS / JOINT SIMULATORS

JOINT KITS


Joint kits are an essential accessory for accurate off-line testing of powered assembly tools.

- Represent production joint conditions off the production line
- Can be adjusted to include joint conditions specified by ISO 5393
- Allows free running of bolt before torque gradient
- Provide linear response. Repeatable 1/4" – 1" drive sizes, 28 – 1,695 Nm.

ROTARY KIT*	MODEL	DRIVE SIZE - IN
	AJKR-28	1/4
	AJKR-135	3/8
	AJKR-271	1/2
	AJKR-1017	3/4
	AJKR-1695	1
STATIONARY KIT**	MODEL	DRIVE SIZE - IN
	AJKS-25D	1/4
	AJKS-38D	3/8
	AJKS-50D	1/2
	AJKS-75D	3/4
	AJKS-100D	1

* AJKR for use with ARTIS external transducers.

**AJKS for use with ASTIS or ARTIS external transducers.

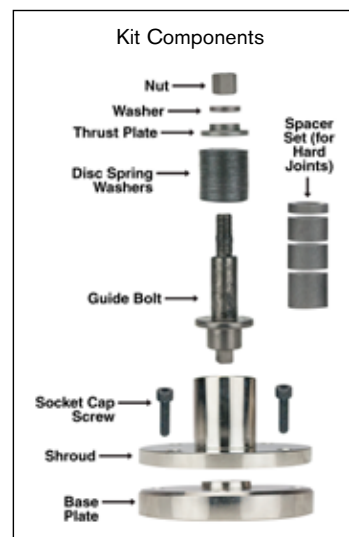

UFT SERIES HYDRAULIC MECHANICAL JOINT SIMULATORS



UFT-6

UFT-10

UFT-16



UFT-S10

UFT-S16



UFT-24

- Designed for pulse tool and continuous drive tool certification and testing, UFT Joint Simulators offer the most repeatable and linear joint rate simulation on the market
- For use with ARTIS external transducers
- Bolt tightening body and hydraulic pressure loading mechanism are connected by a hydraulic pressure circuit. Ideal for ISO 5393 test procedures
- Quickly and easily simulate three joint rates by opening or closing two external valves
- Specially coated testing bolt produces over 100,000 cycles without variation or deformation

MODEL	BOLT SIZE	TORQUE RANGE		WEIGHT	
		NM	FT-LB	LB	KG
UFT-6	M5	3.2 - 5.4	2 - 4	8	3.6
	M6	5.4 - 14.7	4 - 11		
UFT-10 / UFT-S10	M6	6.7 - 14.7	5 - 11	43	19.5
	M8	14.7 - 31.4	11 - 23		
	M10	31.4 - 53.9	23 - 40		
UFT-16 / UFT-S16	M12	53.9 - 88.2	40 - 65	88	40
	M14	88.2 - 149	65 - 110		
	M16	149 - 190	110 - 140		
UFT-24*	M18	190 - 294	140 - 217	108	49.1
	M20	294 - 441	217 - 325		
	M24	441 - 686	325 - 506		

* UFT-24 medium hard/soft joints only

Reaction fixture for continuous drive tools not included. Sockets included.

TORQUE MEASUREMENT CABLES



Torque Measurement Cables

MODEL	DESCRIPTION	SERIAL CABLE	TRANSDUCER CABLE	ROTARY	ROTARY W/ANGLE	STATIONARY	IND STD	INTELLECT
ICBL-USB*	Connects between COM port of display to PC	X						
ATDBLIS*	Connect to IS transducer w/ angle - 10 pin		X		X		X	
ATDBRIS*	Connect to IS transducer - 4 pin		X	X		X	X	
ICBL-10P*	Intellect transducer cable. Identification chip in cable - 10 pin connector		X		X			X
ICBL-4P*	Intellect transducer cable. Identification chip in cable - 4 pin connector		X	X		X		X
ICBL-5000L	Connect from AUET/MTM & ATDA to Intellect Transducers, Analog AISI / AISF		X			X		X
ICBL-8000DIG	Connect from ATDA-8000 series analyzer to AISI / AIFI transducer		X					

* Compatible with ATDA, AUET, ADW products

Tester / Analyzer Compatibility

MODEL	ATC	AUET	AUET/ MTM	AUET- DC	AUET/ MTM-DC	ATDA	ATDA- DC	ATDA-8000-10-DCA (-TA)(-TP)	AISWT SWITCHBOX	ADW	ADW- DC	AIMTS TEST STAND
ICBL-USB	X	X	X	X	X	X	X			X	X	
ATDBLIS		X	X	X	X	X	X					
ATDBRIS		X	X	X	X	X	X					
ICBL-10P		X	X	X	X	X	X					
ICBL-4P		X	X	X	X	X	X					
ICBL-5000L			X		X	X	X		X			X
ICBL-8000DIG								X				

Transducer Compatibility

MODEL	STATIONARY			ROTARY
	ASTIS	ANALOG AISI/AISF	DIGITAL AISI/AISF	ARTIS
ATDBLIS				X
ATDBRIS	X			X
ICBL-10P				X
ICBL-4P				X
ICBL-5000L		X		
ICBL-8000DIG			X	

AUDITOR™

ACRADYNE HIGH TORQUE PNEUMATIC TOOLS

FEATURES AND BENEFITS



AAP1B66600A



AAP1B76950A



AAP1B772000A



AAP1B885100A

AcraDyne's High Torque Pneumatic Bolting Tools offer a reliable and dependable solution for the installation and removal of heavy-duty fasteners. Appropriate for use in industries requiring high torque capability, accuracy, power, and safety.

- Modular design allows for ease of maintenance
- Interchangeable motors and gearing
- Same proven and reliable gearbox as the AcraDyne DC line
- One-hand reverse



MODEL	TORQUE (NM)	TORQUE (FT-LB)	SPEED (RPM)	WEIGHT (LB)	SQUARE DR. (IN)	AIR CONSUMPTION (CFM)
AAP1B66400A	400	300	57	9.75	3/4	22.9
AAP1B66600A	600	450	39	9.75	3/4	22.9
AAP1B66850A	850	625	27	9.75	3/4	22.9
AAP1B76950A	950	700	31	10.4	3/4	26.3
AAP1B771350A	1,350	1,000	22	10.4	1	26.3
AAP1B772000A	2,000	1,475	14	12.7	1	26.3
AAP1B772950A	2,950	2,175	9	14.9	1	26.3
AAP1B885100A	5,100	3,775	8	23	1-1/2	31.5

AIR PREPARATION UNITS

Many stacking filter/regulator combinations are available. See page 167 for options.



AFRL-4



AFRL-4HTA
Standalone Unit

28178
HT Air Tool/AFRL
Carrying Kit



ACRADYNE HIGH TORQUE HIGH-SPEED PNEUMATIC TOOLS

Our High-Torque High-Speed Pneumatic Bolting Tools offer a reliable and dependable solution for the installation and removal of heavy-duty fasteners with high torque capability, accuracy, power, and safety.

FEATURES AND BENEFITS

- Dual motor design provides extremely fast rundown speed
- Improved torque to weight ratio
- Full swivel gearcase facilitates reaction bar positioning for ease of use and operator comfort
- Handle exhaust with low sound level
- Uses the same durable and reliable gearbox from our DC line of high torque tools
- Modular design allows for easy maintenance
- Two-piece handle construction enables flexible handle design
- Available in reversible and non-reversible models



AAP2B771400A



AAP2B772000A



AAP2B773000AR

MODEL	TORQUE		SPEED	WEIGHT		LENGTH		SQUARE DR.
	(NM)	(FT-LB)	(RPM)	(LB)	(KG)	(IN)	(MM)	(IN)
AAP2B76250A	250	185	660	10.5	4.8	10	255	3/4
AAP2B76450A	450	330	335	10.5	4.8	10	255	3/4
AAP2B76650A	650	480	223	10.5	4.8	10	255	3/4
AAP2B76950A	950	700	153	10.5	4.8	10	255	3/4
AAP2B771400A	1,400	1,000	110	14.6	6.6	10	255	1
AAP2B772000A	2,000	1,475	63	14.8	6.7	11.2	284	1
AAP2B773000A	3,000	2,210	52	15.0	6.8	11.6	293	1
AAP2B785100A	4,800	3,540	26.5	19.7	8.9	13.3	338	1.5

REVERSIBLE MODEL	TORQUE		SPEED	WEIGHT		LENGTH		SQUARE DR.
	(NM)	(FT-LB)	(RPM)	(LB)	(KG)	(IN)	(MM)	(IN)
AAP2B76250AR	250	185	660	12.3	5.6	12.5	317	3/4
AAP2B76450AR	450	330	335	12.3	5.6	12.5	317	3/4
AAP2B76650AR	650	480	223	12.3	5.6	12.5	317	3/4
AAP2B76950AR	950	700	153	12.3	5.6	12.5	317	3/4
AAP2B771400AR	1,400	1,000	110	16.4	7.4	12.6	319	1
AAP2B772000AR	2,000	1,475	63	16.6	7.5	13.6	346	1
AAP2B773000AR	3,000	2,210	52	16.8	7.6	14.0	356	1
AAP2B785100AR	4,800	3,540	26.5	21.5	9.7	15.8	400	1.5

ACRADYNE HT PNEUMATIC TOOL ACCESSORIES

Polyurethane Hose for HT Tools




- Durable Polyurethane is chemical resistant and lightweight, and provides excellent recoil memory and maximum flexibility
- Available in transparent hose color (opaque also available)
- Assemblies for coiled hose include reusable swivel fitting. Straight hose available with or without fittings
- Working temperature: -104°F to 175°F
- Working pressure: 100 PSI



Straight Air Hose (Sold Per Foot)

MODEL	DESCRIPTION
ASH-500Z	1/2" I.D.

Contact an AIMCO Customer Service Associate about full reel pricing, 1-503-254-6600, or toll free 1-800-852-1368.

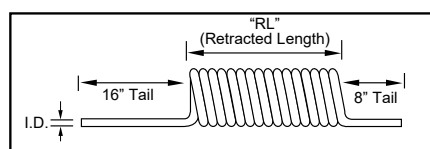

Custom length coil assemblies and special colors available in minimum order quantities. Contact an AIMCO Customer Service Associate, 1-503-254-6600, or toll free 1-800-852-1368.

Single Air Hose Assemblies (Coiled)

MODEL	DESCRIPTION (O.D. x I.D. x LENGTH)	RETRACTED LENGTH	NPT FITTINGS
ASH-500C-15MSZ	3/4" x 1/2" x 15'	13"	1/2"
ASH-500C-25MSZ	3/4" x 1/2" x 25'	23"	1/2"

Rubber Hose for HT Tools



- Designed for use in a wide range of industrial, construction, and agricultural applications
- Constructed of high grade, reinforced EPDM synthetic rubber
- Working temperature: -40°F to 190°F

Single Air Hose (Rubber)

I.D.	O.D.	LENGTH	WORKING PRESSURE	WEIGHT
1/2"	0.81"	10 ft	200 psi	2.0 lb
5/8"	0.97"	10 ft	200 psi	2.7 lb
3/4"	1.12"	10 ft	200 psi	3.4 lb

Custom lengths available. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.

REACTION BARS

Tool includes standard, spline attachment reaction device. See page 43 for part numbers. Custom reaction devices are available; contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.



Reaction Bars

Air Line Fittings



Plugs

MODEL	DESCRIPTION
28161	1/2" x 1/4" MPT
28162	1/2" x 3/8" MPT
28163	1/2" x 1/2" MPT
28164	1/2" x 1/2" FPT



Quick-Change Couplers

MODEL	DESCRIPTION
27768	1/2" FPT
27769	1/2" MPT



Protective Coupler

MODEL	DESCRIPTION
27771	Vinyl



Swivel Fitting

MODEL	CAPACITY
500-SZ	1/2" NPT Swivel Fitting

PULSE TOOLS: OVERVIEW



HOW DOES A PULSE TOOL WORK?

The unique design of a pulse tool, combining motor power and hydraulics, leads to an assembly tool that produces smooth, controlled torque in a series of very fast (2 – 4 milliseconds) events and virtually no torque reaction.

- At free-speed, the entire pulse unit, a sealed cylinder containing hydraulic fluid and an output shaft, rotates at the same speed as the tool motor
- As resistance to rotation increases, the rotation of the output shaft slows, while the rotation of the

cylinder and the hydraulic fluid continues until they approach a seal point within the cylinder

- This seal point produces an increase in fluid pressure and transmits the energy from the rotational mass of the cylinder and fluid to the output shaft, producing torque on the fastener
- After a series of these cycles (pulses), fluid pressure builds to a point that overcomes the limit of a relief valve, allowing pressure to drop and torque to be controlled



BENEFITS OF AIMCO PULSE TOOLS:

Pulse tools offer advantages in all of the PERQ® elements – productivity, ergonomics, reliability and quality

By partnering with AIMCO, manufacturers can apply the advantages of pulse tools in many ways to reduce production costs and increase profits.


- Productivity – Combining high operating speeds with one-handed operation, AIMCO pulse tools help manufacturers produce at the highest possible rates
- Ergonomics – Light weight, low vibration and no torque reaction make AIMCO pulse tools the safest assembly tools available for threaded assembly
- Reliability – Advances in design and AIMCO's extensive maintenance and training programs add up to years of low cost service from any AIMCO pulse tool
- Quality – AIMCO pulse tools offer the most repeatable torque and clamp load results of any assembly tool, guaranteeing high product quality for manufacturers

OMEGA PULSE TOOLS: UAT SERIES

PATENTED AUTO RELIEF TECHNOLOGY:

UAT features patented Auto Relief Technology providing additional control to the application of torque during the pulsing events.



- Auto Relief eliminates initial spike of torque during a cycle. Highly effective on hard joint applications
- Auto Relief ramps up pressure within the pulse unit resulting in more pulses in less time providing a more efficient and even torque event

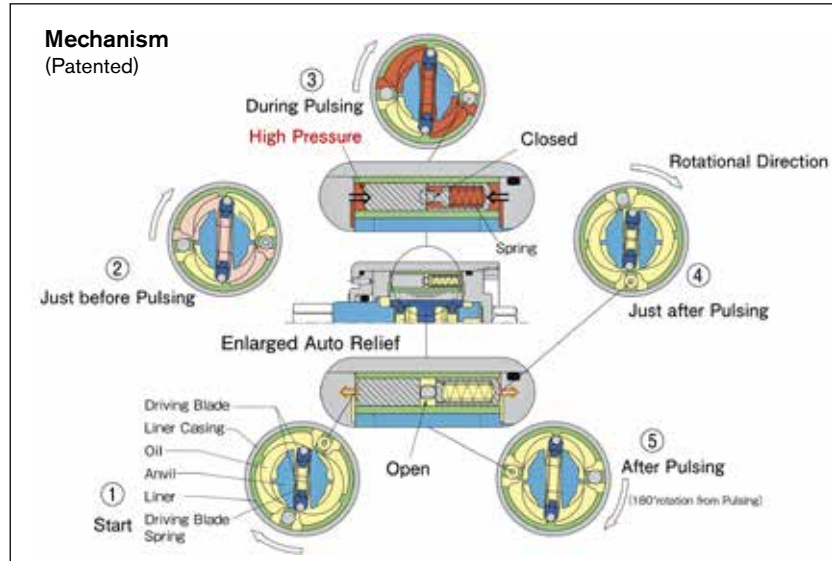


A NEW LEAP FORWARD IN PRODUCTIVITY AND QUALITY:

- Fastening accuracy and time can be improved by as much as 30% depending on application

Fastening efficiency comparison (UAT vs ULT)

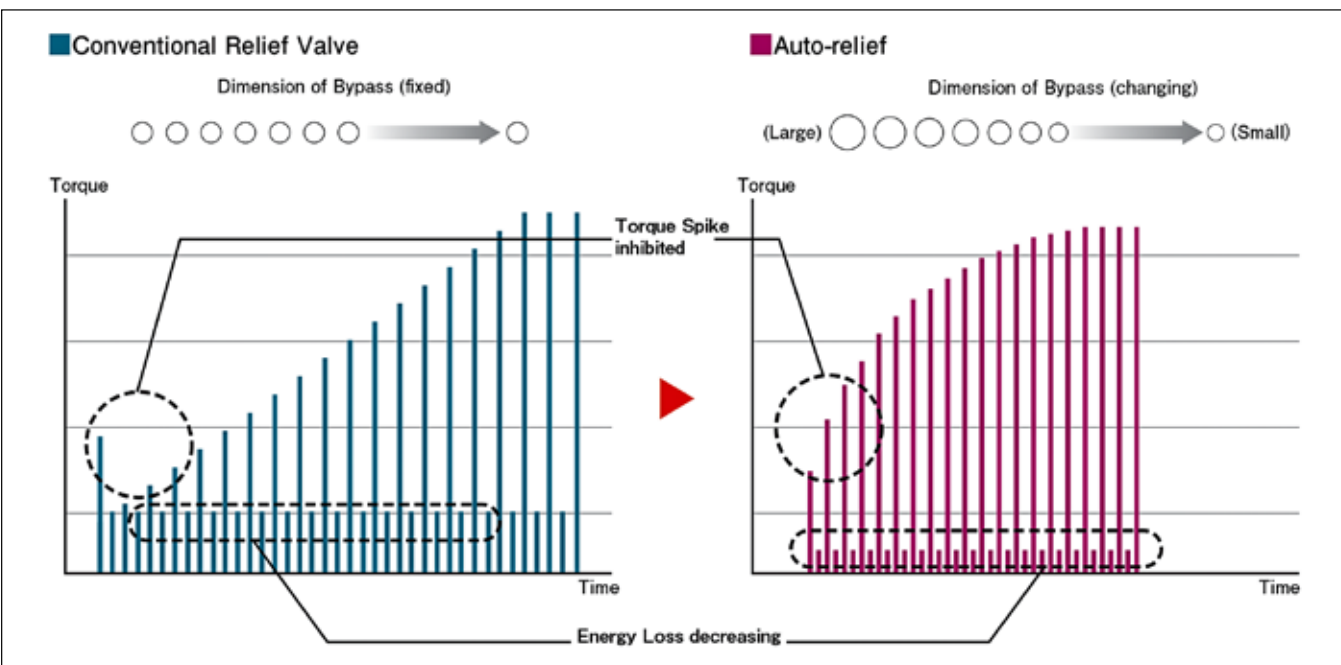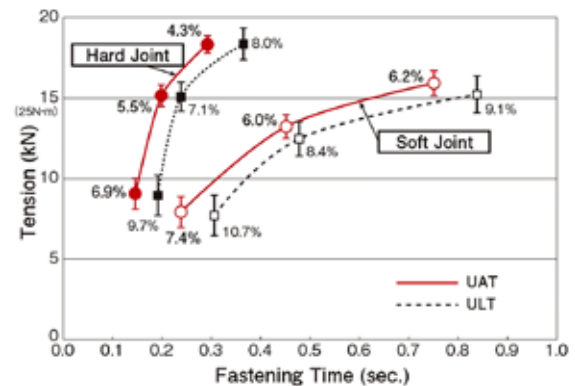


OMEGA PULSE TOOLS: UAT SERIES

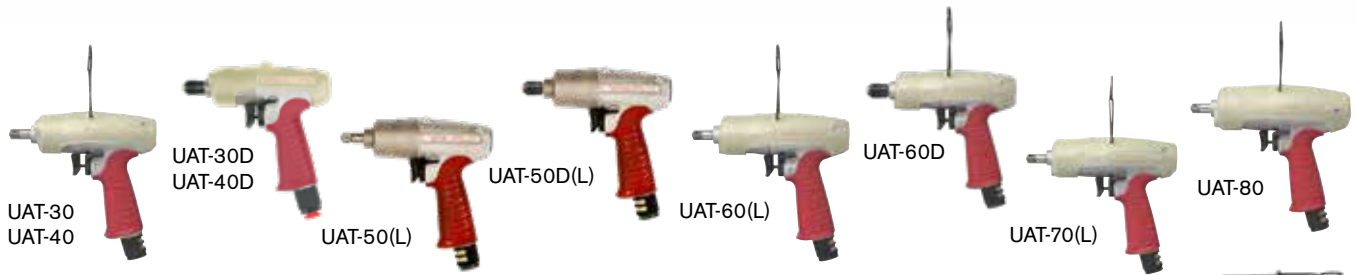

Pistol Shut-Off

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE NM	TORQUE RANGE FT-LB	WEIGHT LB	WEIGHT KG	OVERALL LENGTH IN	OVERALL LENGTH MM	DRIVE IN	SOUND LEVEL dB(A)	AIR USAGE CFM
UAT-30D	4,200	2.5 - 5.5	1.9 - 4.1	1.9	0.9	6.5	165	1/4	76	10.5
UAT-40	3,800	4.5 - 8	3.3 - 5.9	2.0	0.9	6.4	162	3/8	75	8.8
UAT-40D	3,800	4.5 - 8	3.3 - 5.9	2.0	0.9	6.5	165	1/4	75	8.8
UAT-50	4,600	7 - 15.5	5.2 - 11.5	2.0	0.9	6.4	162	3/8	78	8.8
UAT-50D	4,600	7 - 15.5	5.2 - 11.5	2.0	0.9	6.5	165	1/4	78	8.8
UAT-50L	4,000	7 - 15.5	5.2 - 11.5	2.0	0.9	6.4	162	3/8	75	8.8
UAT-50DL	4,000	7 - 15.5	5.2 - 11.5	2.0	0.9	6.5	165	1/4	75	8.8
UAT-60	6,700	15 - 32	11.1 - 23.7	2.1	1.0	6.8	174	3/8	80	12.3
UAT-60D	6,700	15 - 32	11.1 - 23.7	2.1	1.0	7.0	177	1/4	80	12.3
UAT-60L	6,000	13 - 28	9.6 - 20.7	2.1	1.0	6.8	174	3/8	77	8.8
UAT-70	6,000	30 - 55	22.2 - 40.7	2.3	1.1	7.1	180	3/8	80	14.0
UAT-70L	5,300	25 - 48	18.5 - 35.5	2.3	1.1	7.1	180	3/8	78	10.5
UAT-80	5,600	45 - 63	33.3 - 46.6	2.8	1.3	7.3	186	3/8	80	16.8
UAT-90	5,700	50 - 85	37.0 - 62.9	3.2	1.5	7.6	192	1/2	82	18.6
UAT-90L	5,100	45 - 75	33.3 - 55.5	3.2	1.5	7.6	192	1/2	79	15.8
UAT-100	5,200	70 - 130	51.8 - 96.2	3.7	1.7	7.8	199	1/2	82	19.3
UAT-100L	5,200	60 - 110	44.4 - 81.4	3.7	1.7	7.8	199	1/2	79	16.8
UAT-130	4,500	110 - 150	81.4 - 111	5.1	2.3	8.5	217	1/2	82	24.6
UAT-150	3,900	140 - 210	103.6 - 155.4	6.4	2.9	9.5	240	3/4	82	24.6
UAT-180	3,300	160 - 250	118.4 - 185	8.1	3.7	10.5	264	3/4	84	24.6
UAT-200	2,400	200 - 400	148 - 296	12.8	5.8	11.0	279	3/4	85	35.2
UAT-200L	2,400	170 - 280	125.8 - 207.2	12.8	5.8	11.0	279	3/4	85	24.6

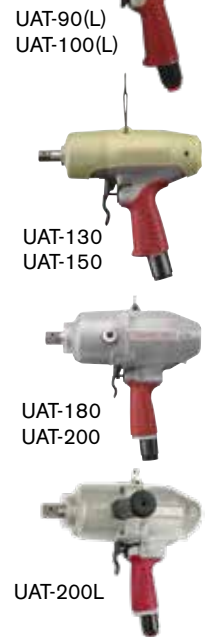

Air Hose Size: 1/4" ID for UAT-30D to UAT-50, 3/8" ID for UAT-60 to UAT-100, 1/2" ID for UAT-100L to UAT-200L

Air Inlet Thread: 1/4" NPT for UAT-30D to UAT-150

Note Torque Ranges reflect residual B joint torque values

3/8" NPT for UAT-180 to UAT-200L

UAT Models containing "L" indicate models designed to run at 57 PSI air pressure.

UAT Models containing "D" indicate 1/4" quick change bit holder

Most models can be equipped with TM (Tightening Monitor) feature for use with qualifier systems. Order TM tools by adding "TM" to model number (for example, UAT-60 becomes UAT-60TM).



Inline Shut-Off

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE NM	TORQUE RANGE FT-LB	WEIGHT LB	WEIGHT KG	OVERALL LENGTH IN	OVERALL LENGTH MM	DRIVE IN	SOUND LEVEL dB(A)	AIR USAGE CFM
UAT-30SD	3,400	2.5 - 5.5	1.9 - 4.1	1.9	0.8	8.7	222	1/4	68	12.3
UAT-40S	3,300	4.5 - 8.0	3.3 - 5.9	1.9	0.9	8.8	224	3/8	70	7.0
UAT-40SD	3,300	4.5 - 8.0	3.3 - 5.9	1.9	0.9	8.9	227	1/4	70	7.0
UAT-50S	3,900	7.0 - 15.5	5.2 - 11.5	1.9	0.9	8.8	224	3/8	78	8.8
UAT-50SD	3,900	7.0 - 15.5	5.2 - 11.5	1.9	0.9	8.9	227	1/4	78	8.8
UAT-50SL	3,800	7.0 - 15.5	5.2 - 11.5	1.9	0.9	8.8	224	3/8	75	7.0
UAT-50SDL	3,800	7.0 - 15.5	5.2 - 11.5	1.9	0.9	8.9	227	1/4	75	7.0
UAT-60S	5,700	15.0 - 32.0	11.1 - 23.7	1.9	0.9	9.0	229	3/8	80	10.5
UAT-60SD	5,700	15.0 - 32.0	11.1 - 23.7	1.9	0.9	9.1	232	1/4	80	10.5
UAT-60SL	5,300	13.0 - 28.0	9.6 - 20.7	1.9	0.9	9.0	229	3/8	77	8.8
UAT-60SDL	5,300	13.0 - 28.0	9.6 - 20.7	1.9	0.9	9.1	232	1/4	77	8.8
UAT-70S	4,700	30.0 - 50.0	22.2 - 37.0	2.1	1.0	9.4	239	3/8	80	12.3
UAT-70SL	4,400	25.0 - 45.0	18.5 - 33.3	2.1	1.0	9.4	239	3/8	78	9.5

Air Hose Size: 1/4" ID for UAT-30 to UAT-50, 3/8" ID for UAT-60 to UAT-70

Air Inlet Thread: 1/4" NPT for UAT-30 to UAT-70

Note Torque Ranges reflect residual B joint torque values

UAT Models containing "D" indicate 1/4" quick change bit holder

UAT Models containing "L" indicate models designed to run at 57 PSI air pressure.

Most models can be equipped with TM (Tightening Monitor) feature for use with qualifier systems. Order TM tools by adding "TM" to model number (for example, UAT-60 becomes UAT-60TM).

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

OMEGA PULSE TOOLS: UL SERIES


OMEGA UL SERIES

Whether the goal is improving productivity, ergonomics, reliability, or quality, the UL Series contains the technology to achieve success.

FEATURES AND BENEFITS

- Models available from 6 – 230 Nm (4.4 – 170 Ft-lb)
- Available in Standard, Tightening Monitor, and Transducerized versions
- High power-to-weight ratio
- Reduced maintenance and extended service life
- Environmentally friendly design
- Accurate and repeatable

Omega Series Pulse Unit

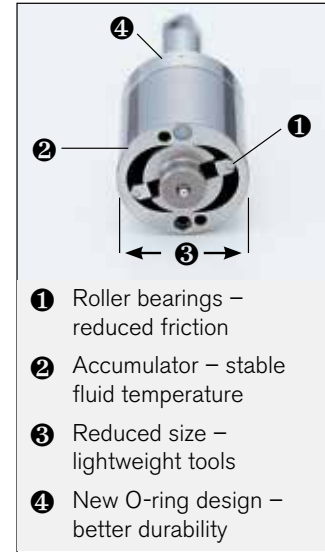

UL-30
UL-50



UL-60
UL-70



UL-40

UL-80

UL-90

UL-100

UL-130

UL-150

UL Series Pistol Non Shut-Off

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED	TORQUE RANGE		WEIGHT		OVERALL LENGTH		DRIVE	SOUND LEVEL	AIR USAGE
	RPM	NM	FT-LB	LB	KG	IN	MM	IN	dB(A)	CFM
UL-30D	5,700	6 - 12	4.4 - 8.9	1.5	0.7	5.4	137	1/4 hex	75	7.0
UL-30	5,700	6 - 12	4.4 - 8.9	1.5	0.7	5.2	133	3/8 sq.	75	7.0
UL-40D	6,100	11 - 20	8.1 - 14.8	1.5	0.7	5.4	137	1/4 hex	75	7.0
UL-40	6,100	13 - 22	9.6 - 16.3	1.5	0.7	5.2	133	3/8 sq.	75	7.0
UL-50D	6,400	18 - 28	13.3 - 20.7	1.7	0.8	5.8	146	1/4 hex	78	10.5
UL-50	6,400	22 - 35	16.3 - 25.9	1.7	0.8	5.5	140	3/8 sq.	78	10.5
UL-60D	7,000	22 - 35	16.3 - 25.9	1.8	0.8	5.6	143	1/4 sq.	80	14.0
UL-60	7,000	32 - 50	23.7 - 37.0	1.8	0.8	5.5	140	3/8 sq.	80	14.0
UL-70	5,700	40 - 65	29.6 - 48.1	2.1	1.0	6.0	153	3/8 sq.	80	15.8
UL-80	5,900	45 - 70	33.3 - 50.0	2.5	1.1	6.4	162	3/8 sq.	80	16.8
UL-90	6,000	60 - 100	44.4 - 74.0	2.9	1.3	6.7	170	1/2 sq.	82	18.6
UL-100	5,400	80 - 130	59.2 - 96.2	3.7	1.7	7.0	177	1/2 sq.	80	20.3
UL-130	4,400	100 - 160	74.0 - 118.4	5.1	2.3	7.8	197	1/2 sq.	83	22.7
UL-150	3,800	150 - 230	109.9 - 169.6	6.6	3.0	8.4	213	3/4 sq.	84	24.7



UL-30S

UL-40S

UL-50S

UL-60S

UL-70S

UL Series Inline Non Shut-Off

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED	TORQUE RANGE		WEIGHT		OVERALL LENGTH		DRIVE	SOUND LEVEL	AIR USAGE
	RPM	NM	FT-LB	LB	KG	IN	MM	IN	dB(A)	CFM
UL-30SD	5,000	6 - 12	4.4 - 8.9	1.4	0.6	8.2	209	1/4 hex	75	8.1
UL-30S	5,000	6 - 12	4.4 - 8.9	1.4	0.6	8.1	205	3/8 sq.	72	8.1
UL-40SD	5,000	9 - 20	6.7 - 14.8	1.4	0.6	8.2	209	1/4 hex	75	8.1
UL-40S	5,000	11 - 22	8.1 - 16.3	1.4	0.6	8.1	205	3/8 sq.	72	8.1
UL-50SD	6,400	18 - 28	13.3 - 20.7	1.6	0.7	8.4	214	1/4 hex	78	12.3
UL-50S	6,400	22 - 35	16.3 - 25.9	1.6	0.7	8.2	208	3/8 sq.	78	12.3
UL-60SD	6,700	22 - 35	16.3 - 25.9	1.7	0.8	8.3	212	1/4 hex	80	15.8
UL-60S	6,700	32 - 50	23.7 - 37.0	1.7	0.8	8.2	209	3/8 sq.	80	15.8
UL-70S	5,400	36 - 60	26.6 - 44.4	1.9	0.9	8.8	223	3/8 sq.	84	14.0

Air Hose Size: 1/4 I.D. for UL-30 (D/SD) - UL-50 (D/SD) - 3/8" I.D. for UL-60 (D/SD) - UL-150 (D/SD) Air Inlet: N.P.T. 1/4

All pulse tools ending in "D" include a 1/4" Hex quick-change bit holder.

NOTE: Torque ranges reflect residual B joint torque values

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

OMEGA PULSE: ULT SERIES



ULT-150



ULT-180



ULT-40C
ULT-50C



ULT-60C



ULT-70C



ULT-70CH

ULT Series Pistol / Angle Shut-Off



MODEL	FREE SPEED RPM	TORQUE RANGE		WEIGHT		OVERALL LENGTH		DRIVE	SOUND LEVEL dB(A)	AIR USAGE CFM
		NM	FT-LB	LB	KG	IN	MM	IN		
Pistol										
ULT-150	3,700	140 - 210	104 - 155	6.4	2.9	9.5	240	3/4" Sq. Dr.	82	24.7
ULT-180	3,300	160 - 250	118 - 185	8.1	3.7	10.4	264	3/4" Sq. Dr.	82	24.7
Angle										
ULT-40C	3,500	4.5 - 7.5	3.3 - 5.6	2.9	1.30	9.8	250	3/8" Sq. Dr.	70	7.0
ULT-50C	4,500	7.0 - 15.5	5.2 - 11.5	3.0	1.35	9.8	250	3/8" Sq. Dr.	78	8.6
ULT-60C	5,200	13 - 28	9.6 - 20.7	3.2	1.45	10.3	261	3/8" Sq. Dr.	80	10.5
ULT-70C	4,400	20 - 35	14.8 - 25.9	3.6	1.65	10.8	275	3/8" Sq. Dr.	82	12.3
ULT-70CH	2,500	30 - 50	22.2 - 37.0	4.1	1.85	11.4	290	1/2" Sq. Dr.	82	12.3

"L" following model number denotes Low Air Pressure type

"H" within model number denotes High Torque type

NOTE: Torque ranges reflect residual B joint torque values



* E logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRA-PULSE SERIES



U-350D



UXR-2000



UX-ST800

Acra-Pulse Pistol Tools

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE* NM	FT-LB	OVERALL LENGTH MM	IN	WEIGHT LB	KG	FROM CENTER TO OUTSIDE MM	IN	DRIVE SIZE	NOISE LEVEL dB(A)	AIR HOSE I.D.	AIR INLET N.P.T.	AIR USAGE CFM
Non Shut-Off, 1/4" Hex Dr. 1/4" Quick Change Chuck Standard											Air Hose Size: 1/4" I.D. Air Inlet: N.P.T. 1/4"			
U-350D	10,500	3.5 - 5.8	2.5 - 4.2	154	6.1	1.7	0.8	22.0	0.9	1/4" Hex	74	1/4"	1/4"	5.3
Non Shut-Off, 3/4" Sq. Dr. Torque Control in Right-Hand Rotation Standard Left-Hand Rotation also available for UXR-2000											Air Hose Size: 1/2" I.D. Air Inlet: N.P.T. 3/8"			
UXR-2000	4,200	300 - 450	220 - 330	282	11.1	14.3	6.5	47.0	1.8	3/4" Sq. Dr.	85	1/2"	3/8"	31.5
Non Shut-Off, 3/8" Sq. Dr. Auto Reversing Stud Bolt Wrench											Air Hose Size: 3/8" I.D. Air Inlet: N.P.T. 1/4"			
UX-ST800	7,300	35 - 55	25 - 40	195	7.7	3.8	1.8	28.0	1.1	3/8" Sq. Dr.	75	3/8"	1/2"	10.5

* NOTE: Torque range reflects residual B joint torque values



U-310SD



U-350SD



UX-900S
UX-1000S



UX-1300S



UXR-2000S
UXR-2400S



UXR-3000S



UXR-T2400S
UXR-T3000S

Acra-Pulse Inline Tools

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE* NM	FT-LB	OVERALL LENGTH MM	IN	WEIGHT LB	KG	FROM CENTER TO OUTSIDE MM	IN	DRIVE SIZE	NOISE LEVEL dB(A)	AIR HOSE I.D.	AIR INLET NPT	AIR USAGE CFM
Non Shut-Off, 1/4" Hex Dr. 1/4" Quick Change Chuck Standard														
U-310SD	11,000	2.5 - 3.1	1.8 - 2.2	222	8.7	1.5	0.6	18.0	0.7	1/4" Hex	74	1/4"	1/4"	5.3
U-350SD	10,500	3.5 - 5.8	2.5 - 4.2	238	9.4	1.5	0.7	22.0	0.7	1/4" Hex	74	1/4"	1/4"	5.3
Non Shut-Off, 1/2" Sq. Dr.														
UX-900S	7,600	45 - 75	35 - 55	310	12.2	3.9	1.8	37.5	1.1	1/2" Sq. Dr.	75	3/8"	1/4"	14.9
UX-1000S	6,800	50 - 95	40 - 70	320	12.6	4.6	2.1	39.0	1.1	1/2" Sq. Dr.	75	3/8"	1/4"	17.9
UX-1300S	6,200	80 - 130	60 - 95	336	13.2	6.6	2.6	42.0	1.3	1/2" Sq. Dr.	77	3/8"	1/4"	19.4
Non Shut-Off, 3/4" Drive TM = Models equipped with a tightening monitor feature for use with qualifier systems														
UXR-2000S(TM)	4,200	300 - 450	220 - 330	340	13.4	15.4	7.0	47.0	1.8	3/4" Sq. Dr.	85	1/2"	3/8"	31.6
Non Shut-Off, 1" Sq. Dr. TM = Models equipped with a tightening monitor feature for use with qualifier systems														
UXR-2400S(TM)	4,000	400 - 650	290 - 470	385	15.2	23.7	11.0	55.0	2.1	1" Sq. Dr.	85	1/2"	1/2"	35.2
UXR-3000S(TM)	4,400	500 - 850	360 - 630	455	17.9	29.3	13.3	62.0	2.1	1" Sq. Dr.	85	1/2"	1/2"	37.1
Shut-Off, 1" Sq. Dr. Inside Trigger Standard TM = Models equipped with a tightening monitor feature for use with qualifier systems														
UXR-T2400S(TM)	3,600	360 - 650	260 - 470	444	17.5	26.5	12.0	61.5	2.4	1" Sq. Dr.	85	1/2"	1/2"	35.3
UXR-T3000S(TM)	4,400	450 - 850	330 - 620	477	18.8	32.0	14.5	62.0	2.4	1" Sq. Dr.	85	1/2"	1/2"	37.1

* NOTE: Torque range reflects residual B joint torque values



UX-500C



UX-612C



UX-700C



UX-800C



UX-1000C

Acra-Pulse Angle Tools

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE* NM	FT-LB	WEIGHT LB	KG	OVERALL LENGTH MM	IN	DRIVE SIZE	NOISE LEVEL dB(A)	AIR HOSE I.D.	AIR INLET N.P.T.	AIR USAGE CFM
Non Shut-Off, 3/8" Sq. Dr.												
UX-500C	9,300	13 - 20	10.0 - 15.0	2.8	1.3	270	10.6	3/8" Sq. Dr.	82	1/4"	1/4"	8.8
UX-612C	9,800	16 - 28	12.0 - 20.0	3.0	1.4	283	11.1	3/8" Sq. Dr.	85	3/8"	1/4"	11.2
UX-700C	9,500	20 - 36	16.0 - 28.0	3.7	1.7	273	10.8	3/8" Sq. Dr.	85	3/8"	1/4"	12.3
UX-800C	9,000	29 - 43	20.0 - 31.0	4.3	1.9	285	11.2	3/8" Sq. Dr.	85	3/8"	1/4"	14.1
Non Shut-Off, 1/2" Sq. Dr.												
UX-1000C	6,800	50 - 80	40.0 - 58.0	6.8	3.1	365	14.4	1/2" Sq. Dr.	90	3/8"	1/4"	17.9

*NOTE: Torque ranges reflect residual B joint torque values

* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

UTM SERIES FASTENING COUNTER

Flexible Poka-Yoke for Quality and Line Control

The UTM-1500 Fastening Counter helps you verify that your assembly procedures are being followed. Parameter setup is simple and can be programmed at the front panel or via a PC. The UTM-1500 provides audible and visual Accept/Reject indications on all rundowns, ensuring that all your fastening is secure.



FEATURES AND BENEFITS

- For use with tools that have the TM feature installed, including AIMCO pulse tools, AIMCO angle nutrunners, AIMCO clutch screwdrivers, and all pistol or lever-start screwdrivers
- Automatically set up pressure values
- Communication and line control:
 - PLC communication inputs (5)/outputs (8)
 - Remote parameter switch selection
 - Variable relays for interfacing with process equipment
 - Optional network interfaces available
- Qualification of "good cycle"



PROCESS VERIFICATION

- Four selectable parameters
- Cycle counting and batch counting
- Programmable timers for detection of double hits, cross-threads, or premature trigger release

A COMPLETE TURNKEY SYSTEM INCLUDES:

- New or retrofitted TM tool
 - Retrofit most existing AIMCO tools for under \$200. Contact an AIMCO Customer Service Associate, 1-503-254-6600, or toll free 1-800-852-1368.
 - Order TM tools by adding "TM" to model number. (Example: UAT-70 becomes UAT-70TM)
- UTM-1500 Fastening Counter
- Digital Pressure Switch (878-845-1)
- 5 m Sensor Cable (910-831-0) or 10 m Sensor Cable (910-832-0)

MODEL	VOLTAGE & FREQUENCY	OPERATIONAL AMBIENT TEMPERATURE	OPERATIONAL AMBIENT & HUMIDITY	DIMENSIONS	WEIGHT	
					LB	KG
UTM-1500A	115 V / 50 Hz	0 - 50° C (non-freezing)	90% RH or less (no dew)	200 mm x 210 mm x 100 mm 7.9" x 8.3" x 3.9"	4.5	2.0
UTM-1500E	230 V / 60 Hz	0 - 50° C (non-freezing)	90% RH or less (no dew)	200 mm x 210 mm x 100 mm 7.9" x 8.3" x 3.9"	4.5	2.0

BP-T PULSE SERIES CORDLESS TOOLS

“Operator First” design means a lighter-weight, ergonomic pulse tool

FEATURES AND BENEFITS

- Direct Power Train and High-Efficiency Brushless Electric Motor deliver reduced noise and vibration
- Hydraulic Impulse Unit delivers reaction-free tightening
- Cooling fan improves heat management, increasing duty cycle up to 20% over the UDBP-TA series
- High-capacity Li-Ion battery pack provides up to 20% more fastener runs per charge than the UDBP-TA series
- The Ergonomic Handle coupled with a Compact Design provides an improved user experience
- Available in regular and wireless transmitting versions (RF8). RF8 models communicate with a receiver for Line Control interfacing



“D” models have a quick-change driver anvil



BP-T60



BP-T50



MODEL*	CAPACITY (NOMINAL BOLT SIZE)		TORQUE RANGE		FREE SPEED	OVERALL LENGTH		WEIGHT W/O BATTERY		SOCKET BIT W/O BATTERY		FROM CENTER TO OUTSIDE		SQ. DR OR HEX SIZE		SOUND LEVEL dB(A)	BATTERY VOLTAGE (CAPACITY)
	MM	IN	NM	FT-LB		MM	IN	KG	LB	KG	LB	MM	IN	MM	IN		
BP-T40-(B)(KIT)	5	No. 10	4.5-8	3.3-5.9	3,300	197	7.8	1.4	3.08	1.15	2.53	27	1.1	9.5 Hex	3/8 Sq.	75	10.8V (2.0Ah)
BP-T40D-(B)(KIT)	5	No. 10	4.5-8	3.3-5.9	3,300	200	7.9	1.4	3.08	1.15	2.53	27	1.1	6.35 Hex	1/4 Hex	75	10.8V (2.0Ah)
BP-T50-(B)(KIT)	6-8	1/4-5/16	7-15	5.1-11.1	3,900	197	7.8	1.4	3.08	1.15	2.53	27	1.1	9.5 Sq.	3/8 Sq.	76	10.8V (2.0Ah)
BP-T50D-(B)(KIT)	6-8	1/4-5/16	6.5-13	4.8-9.6	3,900	200	7.9	1.4	3.08	1.15	2.53	27	1.1	6.35 Hex	1/4 Hex	76	10.8V (2.0Ah)
BP-T60-(B)(KIT)	8	5/16	13-26	9.6-19.2	4,800	202	8.0	1.6	3.52	1.25	2.75	27	1.1	9.5 Sq.	3/8 Sq.	76	14.4V (2.0Ah)
BP-T60D-(B)(KIT)	8	5/16	13-26	9.6-19.2	4,800	205	8.1	1.6	3.52	1.25	2.75	27	1.1	6.35 Hex	1/4 Hex	77	14.4V (2.0Ah)

* Base models come with no battery. Batteries are available separately or in tool/kit combinations.

Add “B” to end of the model number to order 1 tool with 1 battery.


Add “KIT” to the end of the model number to order a tool kit, which includes 1 tool, 2 batteries, and 1 battery charger.

* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

BP-T PULSE SERIES CORDLESS TOOLS

BP-T series tools with the RF8 option enable wireless communication upon successful shut-off of the tool when fastening. This feature can be used to send the shut-off signal when used with the TW-800R receiver (required). The receiver can be tied to a PLC or the optional UTM-1500 Fastener Counter for collecting fastening counts.

RF8 : Poka-Yoke Configuration

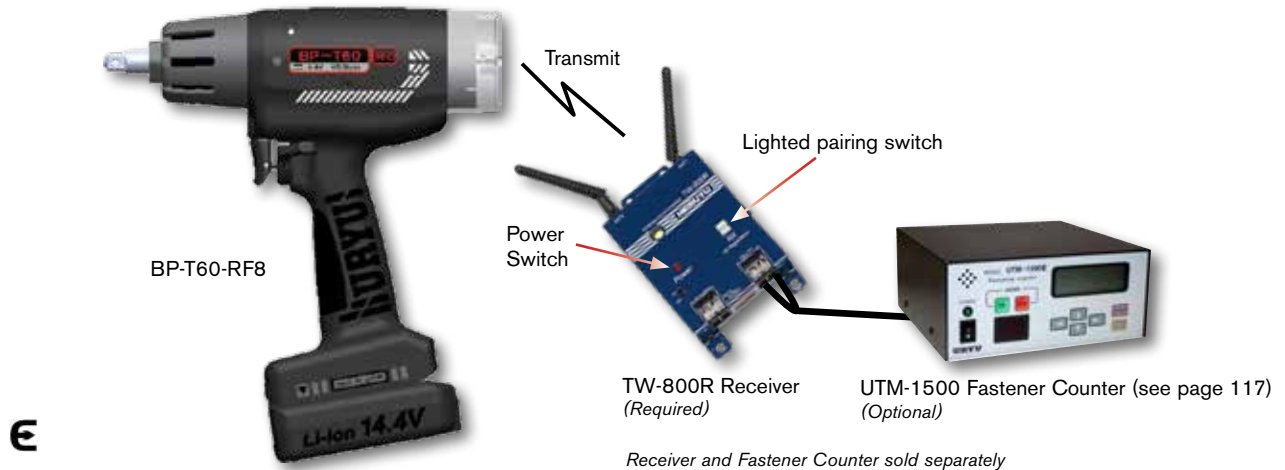

MODEL*	CAPACITY (NOMINAL BOLT SIZE)		TORQUE RANGE		FREE SPEED	OVERALL LENGTH		WEIGHT W/O BATTERY		WEIGHT W/O SOCKET BIT W/OUT BATTERY		FROM CENTER TO OUTSIDE		SQ. DR OR HEX SIZE		SOUND LEVEL dB(A)	BATTERY VOLTAGE (CAPACITY)
	MM	IN	NM	FT-LB		MM	IN	KG	LB	KG	LB	MM	IN	MM	IN		
BP-T40-RF8-(B)(KIT)	5	No. 10	4.5-8	3.3-5.9	3,300	204	8	1.4	3.08	1.15	2.53	27	1.1	9.5 Hex	3/8 Sq.	75	10.8V (2.0Ah)
BP-T40D-RF8-(B)(KIT)	5	No. 10	4.5-8	3.3-5.9	3,300	207	8.2	1.4	3.08	1.15	2.53	27	1.1	6.35 Hex	1/4 Hex	75	10.8V (2.0Ah)
BP-T50-RF8-(B)(KIT)	6-8	1/4-5/16	7-15	5.1-11.1	3,900	204	8	1.4	3.08	1.15	2.53	27	1.1	9.5 Sq.	3/8 Sq.	76	10.8V (2.0Ah)
BP-T50D-RF8-(B)(KIT)	6-8	1/4-5/16	6.5-13	4.8-9.6	3,900	207	8.2	1.4	3.08	1.15	2.53	27	1.1	6.35 Hex	1/4 Hex	76	10.8V (2.0Ah)
BP-T60-RF8-(B)(KIT)	8	5/16	13-26	9.6-19.2	4,800	209	8.2	1.6	3.52	1.25	2.75	27	1.1	9.5 Sq.	3/8 Sq.	76	14.4V (2.0Ah)
BP-T60D-RF8-(B)(KIT)	8	5/16	13-26	9.6-19.2	4,800	212	8.3	1.6	3.52	1.25	2.75	27	1.1	6.35 Hex	1/4 Hex	77	14.4V (2.0Ah)

* Base models come with no battery. Batteries are available separately or in tool/kit combinations.

Add "KIT" to the end of the model number to order a tool kit, which includes 1 tool, 2 batteries, and 1 battery charger.



10.8 V Battery:
EYFB32



14.4 V Battery:
EYFB41



Battery Charger: EYOL82B

BATTERIES AND BATTERY CHARGER

BATTERY MODEL #		DESCRIPTION	VOLTAGE	TYPE	CAPACITY
EYFB32	Battery for BP-T40 (RF8), BP-T40D (RF8), BP-T50 (RF8), and BP-T50D (RF8) models		10.8V	Li-Ion	2.0Ah
EYFB41	Battery for BP-T60 (RF8) and BP-T60D (RF8)		14.4V	Li-Ion	2.0Ah
CHARGER MODEL #	DESCRIPTION	WEIGHT	INPUT VOLTAGE	DIMENSIONS	BATTERY CAPACITY
EYOL82B	Li-Ion battery charger	0.93 kg (2.0 lbs)	120VAC	9.3" D x 7.1" W x 3.6" H	3.0 - 4.2Ah

BODY JACKET



10C-840-1
for BP-T40/BP-T50 Series

10E-840-1
for BP-T60 Series

* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

UBX-T SERIES CORDLESS PULSE TOOLS

REVOLUTIONARY

*Quantum Leap Forward in Hydraulic Pulse Technology
Mated to a Powerful Battery Tool*

Innovative Elliptical Movement
Design with larger blades
and elimination of springs
Lengthens Service Intervals
by as much as 400% with
a high degree of accuracy
and a reaction-free operating
experience



UBX-T70 Battery Oil Pulse Tool

Easier, Less Frequent Maintenance

- Pulse unit contains fewer parts, making it easier to service
- Less precise fluid fill requirements do not compromise tool performance

Improved Operator Comfort

- Short duration, non-mechanical pulsing delivers torque to the fastener with near reaction-free feel
- Lighter tool weight
- Minimal vibration

Increased Quality and Performance


- Elliptical movement produces more power per pulse
- High pulse frequency and crisp tool shut off results in accurate delivery of torque
- Cycle times on most joints are reduced for more efficient production

Reduced Cost of Ownership

- Longer fluid life means tool remains in service longer between maintenance
- Maintenance only takes "soft parts" and fewer of those parts
- Fluid costs have been reduced by 40% (when using OEM recommended fluid)

UBX-T SERIES CORDLESS PULSE TOOLS

UBX Pulse Unit: Increased Output and Durability

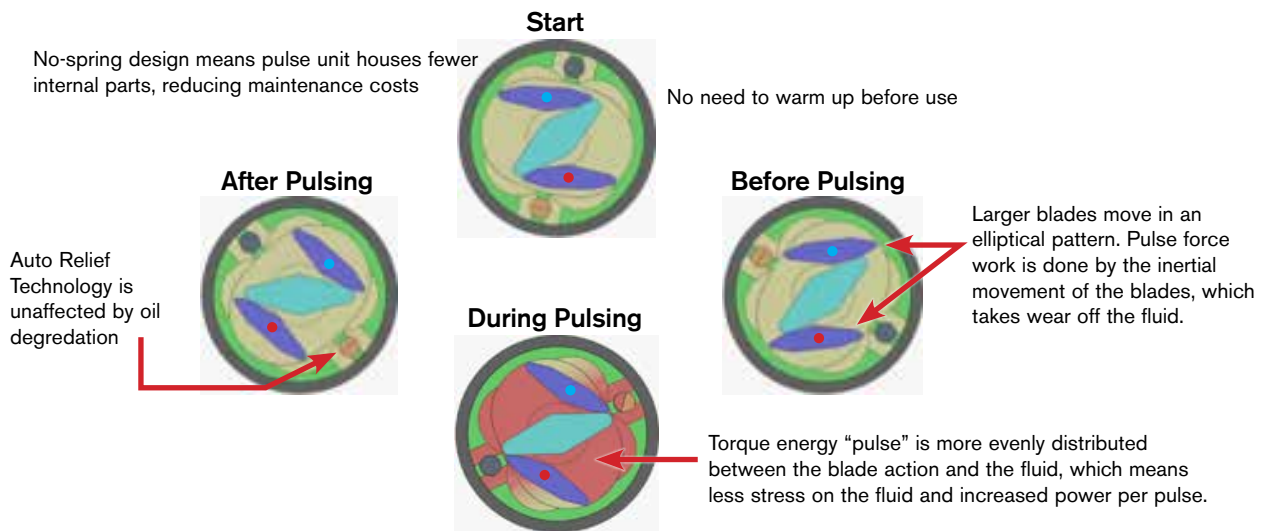

UBX-T70 SHUT-OFF BATTERY OIL PULSE TOOL

The first tool released in the UBX series is the UBX-T70 Shut-Off Battery Oil Pulse Tool. It features all of the advantages of the innovative UBX pulse unit technology, as well as:

Additional Features and Benefits

- Weight reduced by 0.3 lb (140 g) compared to the UDBP-TA70(P)
- On-board LED indicates fastening results
- Number of fastening per minute: 8 (fastening time 0.4 sec.)
- Fastener quantity per full charge: 600 (on a B joint with 1 sec or less freerun)



MODEL	NOMINAL BOLT SIZE		TORQUE		WEIGHT W/O BATTERY		FREE SPEED	LENGTH		HEIGHT		SQ. DRIVE
	MM	IN	NM	FT-LB	KG	LB		MM	IN	MM	IN	
UBX-T70*	8 - 12	5/16 - 1/2	25 - 55	18 - 41	w/o battery: 1.28	w/o battery: 2.8	4,800	187	7.4	242	9.5	3/8

* Base model comes with no battery. Batteries are available separately or in tool/kits combinations.

Add "B" to end of the model number to order 1 tool with 1 battery. Add "KIT" to the end of the model number to order a tool kit, which includes 1 tool, 2 batteries, and 1 battery charger.

BATTERIES AND BATTERY CHARGER

BATTERY MODEL #		DESCRIPTION	VOLTAGE	TYPE	CAPACITY
EYFB41	Battery for UBX-T70		14.4V	Li-Ion	2.0Ah
CHARGER MODEL #		DESCRIPTION	WEIGHT	INPUT VOLTAGE	BATTERY CAPACITY
EYOL82B	Li-Ion battery charger	0.93 kg (2.0 lbs)	120VAC	9.3" D x 7.1" W x 3.6" H	3.0 - 4.2Ah



14.4 V Battery:
EYFB41



Battery Charger: EYOL82B

UDP-TA DIRECT PLUG-IN PULSE SERIES

DIRECT PLUG IN, SHUT OFF PULSE TOOLS

FEATURES AND BENEFITS

- Direct Wall Plug in – Tool plugs directly to 100 – 115 VAC wall power with circuit protection breaker box or integrated power cable balancer
- Brushless (IPM) Motor provides long motor life with integrated trigger activated fan for increased duty cycle
- Patented Auto Relief Pulse Unit Technology
- Lightweight, high impact, rugged plastic housing for superior ergonomics
- Optional power cable integrated balancer available



UDP-TA40(B)



UDP-TA50D(B-TL)

MODEL	TORQUE RANGE		RPM FREE SPEED	OVERALL LENGTH		WEIGHT		DRIVE
	NM	FT-LB		IN	MM	LB	KG	
Bottom Cable Exit Models (denoted by B)								
UDP-TA40 (B)	4.5 - 8.0	3.3 - 5.9	3,300	7.1	179.5	3.0	1.4	3/8" Sq.
UDP-TA40D (B)	4.5 - 8.0	3.3 - 5.9	3,300	7.2	182.5	3.0	1.4	1/4" Hex
UDP-TA50 (B)	7.0 - 15.5	5.2 - 11.5	3,900	7.1	179.5	3.0	1.4	3/8 Sq.
UDP-TA50D (B)	7.0 - 15.5	5.2 - 11.5	3,900	7.2	182.5	3.0	1.4	1/4" Hex
UDP-TA55 (B)	12.5 - 25.0	9.3 - 18.5	4,800	7.3	184.5	3.0	1.4	3/8" Sq.

Top Cable Exit Models (denoted by (B-TL))

UDP-TA40 (B-TL)	4.5 - 8.0	3.3 - 5.9	3,300	7.1	179.5	3.0	1.4	3/8" Sq.
UDP-TA40D (B-TL)	4.5 - 8.0	3.3 - 5.9	3,300	7.2	182.5	3.0	1.4	1/4" Hex
UDP-TA50 (B-TL)	7.0 - 15.5	5.2 - 11.5	3,900	7.1	179.5	3.0	1.4	3/8" Sq.
UDP-TA50D (B-TL)	7.0 - 15.5	5.2 - 11.5	3,900	7.2	182.5	3.0	1.4	1/4" Hex
UDP-TA55 (B-TL)	12.5 - 25.0	9.3 - 18.5	4,800	7.3	184.5	3.0	1.4	3/8" Sq.

OPTIONAL ACCESSORIES

MODEL	DESCRIPTION
UCB-25	Power Cable Balancer
UCB-TA-CBL	110VAC Wall-to-Breaker Power Cable
910-629-0	Breaker Unit
910-618-0	5M UDP Tool to Breaker Cable
910-619-0	10M UDP Tool to Breaker Cable
910-627-0	5M UDP Extension Cable*

* Extension Cables connect between Tool and Breaker Cables



UCB-25
Power Cable
Balancer



910-619-0
10M Tool-to-Breaker Cable




910-629-0 Breaker Unit
UCB-TA-CBL Wall-to-Breaker
Power Cable

UAN & URW SERIES NUTRUNNERS

UAN SERIES ANGLE NUTRUNNERS

Designed for fastening in tight quarters or applications not served well by a pulse tool. The UAN Series transfers torque through beveled angle gears, continuously driving the fastener. When the resistance to rotation overcomes the spring resistance on the clutch, the tool will disengage at the adjusted torque value. Low reaction force characteristics on hard joints make it comfortable for the operator to use. Ideal for applications ranging from 6 – 60 Nm (4 – 44 ft-lb).

- Torque Control
- Electronically Monitored or Controlled type

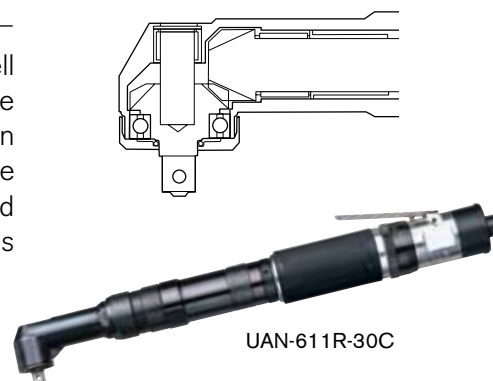

UAN-611R-30C

Angle/Inline Torque Control UAN Series


Recommended Air Pressure: 85 psi

MODEL	TORQUE RANGE		FREE SPEED	OVERALL LENGTH		ANGLE HEAD HEIGHT		FROM CENTER TO OUTSIDE		WEIGHT LESS SOCKET		SQUARE DRIVE	NOISE LEVEL	AIR USAGE
	NM	FT-LB	RPM	MM	IN	MM	IN	MM	IN	KG	LB	IN	dB(A)	CFM
ANGLE														
UAN-611R-60C	6.5 - 12.0	4.3 - 8.6	620	383	15.1	47	1.9	14.0	0.5	1.6	3.5	3/8	80	21.2
UAN-611R-50C	8.5 - 15.0	5.7 - 10.8	470	373	14.7	47	1.9	14.0	0.5	1.6	3.5	3/8	80	21.2
UAN-611R-40C	10.0 - 18.0	7.2 - 12.9	400	373	14.7	47	1.9	14.0	0.5	1.6	3.5	3/8	80	21.2
UAN-611R-30C	13.0 - 25.0	9.3 - 18.0	270	373	14.7	47	1.9	14.0	0.5	1.6	3.5	3/8	80	21.2
UAN-701R-60C	20.0 - 31.0	14.5 - 23.1	600	445	17.5	47	1.9	14.0	0.5	2.4	5.3	3/8	85	31.8
UAN-701R-40C	28.0 - 45.0	21.0 - 33.3	400	455	17.9	51	2.0	18.0	0.7	2.4	5.3	3/8	85	31.8
UAN-701R-30C	37.0 - 60.0	27.5 - 44.1	300	455	17.9	58	2.3	18.0	0.7	2.4	5.3	1/2	85	31.8

Air Hose Size: 3/8 I.D. Air Inlet: N.P.T. 1/4

URW SERIES IN-LINE RATCHET WRENCHES

Designed to set flush over the fastener head, the URW Series is ideal for narrow fastening spaces. Motor torque is transferred from a gear driven, dual lobed cam that pushes a spring loaded push rod, rotating the socket one tooth at a time. A wide variety of socket sizes, head thicknesses, and tool lengths allow the URW Series access to many difficult applications.

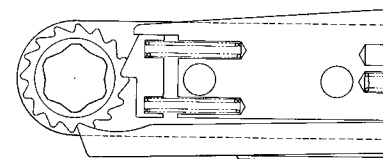

URW-8



URW-9N



URW-10N



URW-12N

URW Series Ratchet Wrenches

Recommended Air Pressure: 85 psi

MODEL	MAX TORQUE		FREE SPEED	OVERALL LENGTH		WEIGHT		MIN/MAX HEX SOCKET SIZE		AIR USAGE
	NM	FT-LB	RPM	MM	IN	LB	KG	MM	IN	CFM
STRAIGHT HEAD										
URW-6	11	8.1	210	292	11.5	2.5	1.2	6 - 12	1/4 - 7/16	9.9
URW-8N	16	11.8	260	300	11.8	4.2	1.9	7 - 15	7/16 - 9/16	19.5
URW-8	16	11.8	240	360	14.2	5.0	2.3	7 - 15	7/16 - 9/16	19.8
URW-9N	31	22.9	140	380	15.0	5.2	2.4	7 - 15	7/16 - 9/16	23.7
URW-10N	57	42.2	155	394	15.5	5.8	2.7	10 - 19	9/16 - 3/4	25.0
URW-12N	59	43.7	145	397	15.6	5.9	2.7	12 - 23	3/8 - 13/16	25.0

Air Hose Size: 3/8 I.D. Air Inlet: N.P.T. 1/4


*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

TUBENUT & GEARED NUTRUNNERS

UOW SERIES OPEN-END NUTRUNNERS

Designed for tubenut fastening, the UOW Series can transfer torque through a variety of options.

- Stall Type – Depending on the application requirements, the standard UOW Series will stall when torque resistance matches power output
- Mechanical Shut-off Type – For greater torque accuracy and less reaction impulse to the operator, the UOW-T Series incorporates a mechanical clutch to shut off the tool at the preset torque
- Electronically Monitored Type – For critical torque applications requiring monitoring or controlling of the fastening torque, the UOW-M Series utilizes a transducer to signal the clutch shut-off
- UOW series incorporates a one-hand, two-step throttle, which automatically reverses the socket to a preset open position

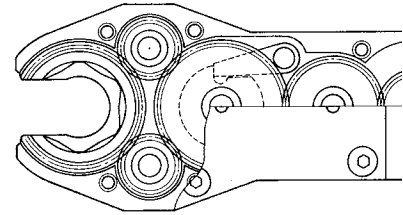

UOW-11-10



UOW-11-14



UOW-11-22



UOW-11-30



UOW-T60-22



UGW-8N

UOW / UOW-T Series Tubenut Wrenches

Recommended Air Pressure: 85 psi

MODEL	MAX TORQUE/RANGE		FREE	OVERALL LENGTH		WEIGHT		MIN/MAX HEX SOCKET SIZE		NOISE	AIR
	NM	FT-LB	SPEED RPM	MM	IN	LB	KG	MM	IN	LEVEL dB(A)	USAGE CFM
Stall											
UOW-11-10	13	9.6	390	295	11.7	3.3	1.5	7 - 12	1/4 - 7/16	76	10.5
UOW-11-14	16	11.8	290	311	12.3	3.5	1.6	10 - 17	7/16 - 5/8	76	10.5
UOW-11-22	24	17.8	220	326	12.8	3.9	1.8	11 - 24	7/16 - 5/8	76	10.5
UOW-11-30	32	23.7	160	347	13.7	4.4	2.0	14 - 36	5/8 - 1-3/16	76	10.5
Shut-Off Clutch											
UOW-T60-10	4 - 14	3.0 - 10.4	300	370	14.6	4.6	2.1	7 - 12	1/4 - 7/16	76	10.5
UOW-T60-14	5 - 17	3.7 - 12.6	240	385	15.1	4.9	2.2	10 - 17	7/16 - 5/8	76	10.5
UOW-T60-22	7 - 24	5.2 - 17.8	170	400	15.8	5.2	2.4	11 - 24	7/16 - 5/8	76	10.5
UOW-T60-30	10 - 32	7.4 - 23.7	130	420	16.6	5.7	2.6	14 - 36	5/8 - 1-3/16	76	10.5
Geared Wrenches											
UGW-6N	18	13.3	530	310	12.2	3.1	1.4	9 - 12	3/8 - 7/16	76	10.5
UGW-8N	23	17.0	410	322	12.7	3.2	1.5	10 - 17	7/16 - 5/8	76	10.5

Air Hose Size: 3/8 I.D.

Air Inlet: N.P.T. 1/4


DYNATORQUE MANUAL TORQUE MULTIPLIERS



FEATURES AND BENEFITS


Manual Torque Multipliers offer the perfect, economical solution to high torque bolting applications.

- Superior power to weight ratio
- Delivered torque accuracy +/- 4%
- Anti-Wind Up safety feature (2,800 NM models and up) prevents input device from springing backward when released
- True torque multiplication ratios
- Standard reaction arms supplied. Custom reaction arms/nose extensions available to suit specific applications
- No preventative maintenance required
- Overload protected by shear-drive design (spare torsion shaft included). Easily replace sheared-off pins at the work site

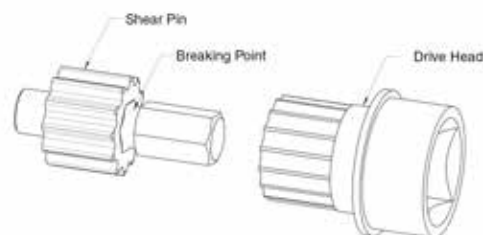

MODEL	INPUT IN	OUTPUT IN	RATIO	MAX TORQUE OUTPUT		A (MM)	B (MM)	C (MM)	D (MM)	WEIGHT*	
				Nm	FT-Lb					LB	KG
ATM-800	1/2	3/4	1:3.5	800	590	65	105	132	130	2.9	1.3
ATM-1800	3/4	1	1:3.6	1,800	1,327	90	150	188	132	6.6	3.0
ATM-2800	1/2	1	1:13	2,800	2,066	95	200	240	132	11.5	5.2
ATM-3800	3/4	1	1:13	3,800	2,804	95	200	240	132	11.5	5.2
ATM-5000	3/4	1.5	1:17	5,000	3,690	120	215	272	150	15.4	7.0
ATM-8000	3/4	1.5	1:49	8,000	5,904	132	268	344	200	25.4	11.5
ATM-12000	3/4	1.5	1:58	12,000	8,856	156	272	348	200	30.9	14.0
ATM-16000	3/4	2.5	1:75	16,000	11,808	215	292	370	225	57.3	26.0

* Weight shown does not include weight of reaction device.

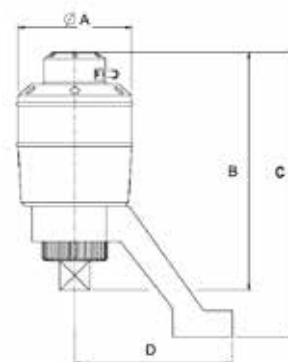

CARRYING CASE

All DynaTorque Multipliers are supplied in a rugged, weather-resistant, portable carrying case.



US-LT PNEUMATIC SCREWDRIVERS

TORQUE CONTROL AUTOMATIC SHUT-OFF TYPE

- Precise repeatability improves quality
- Minimal wear on internal parts for longer life
- Quick shut off for minimum torque reaction
- Speed choice for flexibility
- Easy external torque adjustment
- Midrange air motor provides high speed during entire cycle
- Ideal for industrial torque control applications



US-LT30B Series



US-LT50B Series



US-LT10B



US-LT20B Series



US-LT40B Series

Torque Control Light Touch (LT) Series – Push-To-Start Inline

Recommended Air Pressure: 85 psi

MODEL	TORQUE RANGE		FREE SPEED	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		NOISE LEVEL	AIR USAGE
	NM	IN-LB	RPM	MM	IN	LB	KG	MM	IN	dB(A)	CFM
US-LT10B	0.2 - 0.6	1.8 - 5.3	1,000	191	7.5	0.6	0.3	12.0	0.5	75	5.2
US-LT20B-10	0.4 - 1.1	3.1 - 9.7	1,000	180	7.1	0.7	0.3	13.0	0.5	70	5.6
US-LT20B-18	0.3 - 0.7	2.2 - 6.2	1,800	180	7.1	0.7	0.3	13.0	0.5	70	5.6
US-LT30B-11	1.1 - 2.1	9.7 - 18.5	1,100	187	7.4	0.9	0.4	15.5	0.6	70	7.0
US-LT30B-17	0.7 - 1.5	6.2 - 13.2	1,700	187	7.4	0.9	0.4	15.5	0.6	70	7.0
US-LT30B-23	0.4 - 1.0	3.5 - 8.8	2,300	187	7.4	0.9	0.4	15.5	0.6	71	7.0
US-LT40B-08	1.6 - 4.0	14.1 - 35.2	800	209	8.2	1.4	0.7	16.5	0.6	70	10.5
US-LT40B-15	1.0 - 2.2	6.2 - 19.4	1,500	209	8.2	1.4	0.7	16.5	0.6	70	10.5
US-LT40B-21	1.0 - 1.7	6.2 - 15.0	2,100	209	8.2	1.4	0.7	16.5	0.6	74	10.5
US-LT50B-05	5.0 - 10.2	44.0 - 92.4	480	240	9.5	2.2	1.0	19.5	0.8	74	17.5
US-LT50B-08	3.0 - 5.5	26.4 - 48.4	800	240	9.5	2.2	1.0	19.5	0.8	75	17.5
US-LT50B-17	1.5 - 2.6	9.7 - 23.0	1,700	240	9.5	2.2	1.0	19.5	0.8	75	17.5


Air Hose Size: 1/4 I.D. for US-LT10B - US-LT40B Series - 3/8" I.D. for US-LT50B Series

Air Inlet: 1/8 for US-LT10B - US-LT20B Series - 1/4" for US-LT30B - US-LT50B Series

Each model is equipped with its standard and alternate clutch springs

External Torque Adjustment (Air Shut-Off)

Set the hand driver into the key hole on the Adjusting Gear, turn clockwise to increase torque. Turn counter clockwise to decrease torque.



US-LT PNEUMATIC SCREWDRIVERS



US-LT30B_C Series



US-LT40B_C Series



US-LT40_C Series



US-LT30BL Series



US-LT40BL Series

Torque Control Light Touch (LT) Series – Angle & Lever

Recommended Air Pressure: 85 psi

	TORQUE RANGE SOFT JOINT		FREE SPEED	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		HEX BIT OR DRIVE SIZE	NOISE LEVEL	AIR USAGE
MODEL	NM	IN-LB	RPM	MM	IN	LB	KG	MM	IN	IN	dB(A)	CFM
Angle												
US-LT30B-11C	1.1 - 2.1	3.5 - 18.5	1,100	298	10.7	1.5	0.7	36	1.4	1/4	73	7.0
US-LT30B-17C	0.7 - 1.5	3.5 - 13.2	1,700	295	10.7	1.5	0.7	36	1.4	1/4	73	7.0
US-LT40B-03C	5.0 - 10.0	44 - 88	300	359	14.2	2.4	1.1	35.5	1.4	3/4	72	10.5
US-LT40B-05C	2.3 - 5.7	20.0 - 49.5	500	322	13.0	2.1	0.9	38.5	1.5	1/4	75	10.5
US-LT40B-08C	1.6 - 4.0	8.7 - 34.7	800	320	12.8	2.0	0.9	36	1.4	1/4	75	10.5
US-LT40B-15C	1.0 - 2.2	8.7 - 19.4	1,500	320	12.8	2.0	0.9	36	1.4	1/4	75	10.5
US-LT40-03C	5.0 - 10.0	43.4 - 86.8	300	360	14.2	2.4	1.1	35.5	1.4	1/4 Sq.	72	10.5
US-LT40-05C	2.3 - 5.7	20.0 - 50.2	500	322	13.0	2.1	0.9	35.5	1.4	1/4 Sq.	75	10.5
US-LT40-08C	1.6 - 4.0	8.7 - 34.7	800	320	12.8	2.0	0.9	32	1.3	1/4 Sq.	75	10.5
Lever												
US-LT30BL-11	1.1 - 2.1	9.7 - 18.5	1,100	229	8.2	1.2	0.5	15	0.6	1/4	70	5.2
US-LT30BL-17	0.7 - 1.5	6.2 - 13.2	1,700	229	8.2	1.2	0.5	15	0.6	1/4	70	5.2
US-LT30BL-23	0.4 - 1.0	3.5 - 8.8	2,300	229	8.2	1.2	0.5	15	0.6	1/4	70	5.2
US-LT40BL-08	1.6 - 4.0	14.1 - 35.2	800	249	9.8	1.5	0.7	17	0.7	1/4	70	5.6
US-LT40BL-15	1.0 - 2.2	8.8 - 19.4	1,500	249	9.8	1.5	0.7	17	0.7	1/4	70	5.6

Angle Head Height: 32 - 36mm

Air Inlet: N.P.T. 1/4"

Air Hose Size: 1/4" I.D. for all models



US-LT31PB Series



US-LT41PB Series



US-LT51PB Series



US-LT60P Series

Torque Control Light Touch (LT) Series – Pistol

Recommended Air Pressure: 85 psi

MODEL	TORQUE RANGE (SOFT JOINT)		FREE SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		NOISE LEVEL dB(A)	AIR USAGE CFM
	NM	IN-LB		MM	IN	LB	KG	MM	IN		
US-LT31PB-05	2.4 - 5.0	21.1 - 44.0	500	189	8.2	1.9	0.9	16	0.6	70	7.0
US-LT31PB-11	1.1 - 2.1	9.7 - 18.5	1,100	170	7.0	1.6	0.7	16	0.6	70	7.0
US-LT31PB-17	0.7 - 1.5	6.2 - 13.2	1,700	170	7.0	1.6	0.7	16	0.6	70	7.0
US-LT31PB-23	0.4 - 1.0	3.5 - 8.8	2,300	170	7.0	1.6	0.7	16	0.6	70	7.0
US-LT41PB-08	1.6 - 4.0	14.0 - 35.2	800	175	7.7	1.9	0.9	17	0.6	70	10.5
US-LT41PB-15	1.0 - 2.2	8.8 - 19.4	1,500	175	7.7	1.9	0.9	17	0.6	70	10.5
US-LT41PB-21	1.0 - 1.7	8.8 - 15.0	2,500	175	7.7	1.9	0.9	17	0.6	74	10.5
US-LT51PB-05	5.0 - 10.5	44.0 - 92.4	480	198	8.5	2.6	1.2	20	0.8	74	17.5
US-LT51PB-08	3.0 - 5.5	26.4 - 48.4	800	198	8.5	2.6	1.2	20	0.8	75	17.5
US-LT51PB-17	1.5 - 2.6	13.2 - 22.9	1,700	198	8.5	2.6	1.2	20	0.8	75	17.5
US-LT60P-03*	7.0 - 20.0	61.6 - 176.0	320	230	9.1	3.7	1.7	22	0.9	75	21.0
US-LT60P-07*	4.0 - 10.0	35.2 - 88.0	650	230	9.1	3.7	1.7	22	0.9	76	21.0
US-LT60P-11*	4.0 - 7.0	35.2 - 61.6	1,100	230	9.1	3.7	1.7	22	0.9	77	21.0

Air Hose Size: 1/4 I.D. for US-LT31PB & US-LT41PB Series

Air Inlet: N.P.T. 1/4"

3/8 I.D. for US-LT31PB-05, US-LT51PB Series & US-LT60P Series

* Optional 3/8" Sq. Drive available for US-LT60P Series ADD (P) to Model Number

US-LT PNEUMATIC SCREWDRIVER ACCESSORIES



Optional Clutch Springs

MODEL	CLUTCH SPRINGS PROVIDED		RECOMMENDED TORQUE RANGE HARD JOINT		CLUTCH SPRING CODE NUMBER
	Standard	Option	Nm	in-lb	
US-LT10B	Black		0.20 - 0.60	1.7 - 5.2	976-379-0
US-LT20B-10	Black		0.34 - 1.10	3.0 - 9.5	976-432-0
		Red	0.20 - 0.70	1.7 - 6.1	976-431-0
		Yellow	0.15 - 0.34	1.3 - 3.0	976-430-0
US-LT20B-18	Red		0.24 - 0.67	2.2 - 6.1	976-431-0
		Yellow	0.15 - 0.34	1.3 - 3.0	976-430-0
US-LT20B-26	Yellow		0.15 - 0.34	1.3 - 3.0	976-430-0
US-LT31PB-05	Red		2.35 - 5.00	20.9 - 44.0	976-493-0
		Pink	0.98 - 2.74	8.7 - 24.3	976-471-0
US-LT30 Series, 1100 rpm	Blue		0.98 - 2.1	8.7 - 18.5	976-472-0
		Red	0.67 - 1.76	6.1 - 15.6	976-493-0
		Pink	0.39 - 0.98	3.5 - 8.7	976-471-0
	Black	(not included)	1.22 - 2.74	10.8 - 24.3	976-504-0
US-LT30 Series, 1700 rpm	Red		0.67 - 1.47	6.1 - 13.0	976-493-0
		Pink	0.39 - 0.98	3.5 - 8.7	976-471-0
US-LT30 Series, 2300 rpm	Pink		0.39 - 0.98	3.5 - 8.7	976-471-0
US-LT40-03C	Red		4.90 - 9.80	43.4 - 86.8	976-516-0
US-LT40 Series, 800 rpm	Black		1.57 - 3.92	13.9 - 34.7	976-515-0
		Red	0.98 - 2.17	8.7 - 19.1	976-516-0
		Yellow	0.98 - 1.67	8.7 - 14.8	976-517-0
US-LT40 Series, 1500 rpm	Red		0.98 - 2.17	8.7 - 19.1	976-516-0
		Yellow	0.98 - 1.67	8.7 - 14.8	976-517-0
US-LT40 Series, 2100 rpm	Yellow		0.98 - 1.67	8.7 - 14.8	976-517-0
US-LT50 Series, 500 rpm	Black		4.9 - 10.3	43.4 - 91.1	976-620-0
		Red	2.9 - 5.4	26.1 - 47.7	976-614-0
		Yellow	1.4 - 2.5	13.0 - 22.6	976-588-0
US-LT50 Series, 800 rpm	Red		2.7 - 5.4	24.3 - 47.7	976-614-0
US-LT50 Series, 1700 rpm	Yellow		1.4 - 2.5	13.0 - 22.6	976-588-0
			1.4 - 2.6	13.0 - 23.0	976-588-0



408-088-2

Silencer Assemblies

MODEL	DIRECT TYPE SILENCER	LEADER HOSE ASSEMBLY	EXHAUST HOSE ASSEMBLY
US-LT10 Series	N/A	934-201-0	459-885-1
US-LT20 Series	N/A	934-201-0	455-885-1
US-LT30 Series	408-088-2	934-150-0	408-885-0
US-LT40 Series	496-088-1	934-150-0	—

US & US-LD PNEUMATIC SCREWDRIVERS



US-LD40P-15



US-LD50P-08



US-3.5ACB

Direct Drive Series

Recommended Air Pressure: 72 psi

MODEL	MAX TORQUE				FREE SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		NOISE LEVEL dB(A)	AIR USAGE CFM
	SOFT JOINT		HARD JOINT			MM	IN	LB	KG	MM	IN		
	NM	FT-LB	NM	FT-LB									
Pistol													
US-LD40P-08	4.8	3.6	5.7	4.2	940	130	5.1	1.5	0.7	17	0.7	70	14.0
US-LD40P-15	3.0	2.2	3.2	2.4	1,700	130	5.1	1.5	0.7	17	0.7	70	14.0
US-LD40P-21	2.0	1.5	2.8	2.1	2,500	130	5.1	1.5	0.7	17	0.7	74	14.0
US-LD50P-05	10.0	7.4	11.2	8.3	500	153	6.0	2.0	0.9	20	0.8	74	17.5
US-LD50P-08	6.5	4.8	7.8	5.8	900	153	6.0	2.0	0.9	20	0.8	75	17.5
US-LD50P-17	3.5	2.6	5.9	4.4	1,900	150	5.9	2.0	0.9	20	0.8	75	17.5

ANGLE	MAX TORQUE				CAPACITY (SCREW SIZE)		FREE SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		NOISE LEVEL dB(A)	AIR USAGE CFM
	SOFT JOINT NM FT-LB		HARD JOINT NM FT-LB		MM	IN		MM	IN	LB	KG	MM	IN		
US-3.5ACB	1.75	1.1	2.5	1.8	4	No. 8	2,000	200	79	1.4	0.7	10.0	0.4	85	7.0

Air Hose Size: 1/4" I.D. Air Inlet: N.P.T. 1/4"



US-3.5B



US-5

Cushion Clutch Series

Recommended Air Pressure: 57 psi

MODEL	CAPACITY (SCREW SIZE)		FREE SPEED RPM	OVERALL LENGTH		WEIGHT LESS BIT		FROM CENTER TO OUTSIDE		NOISE LEVEL dB(A)	AIR USAGE CFM
	MM	IN		MM	IN	LB	KG	MM	IN		
US-3.5B	4	No. 8	2,000	214	8.5	1.4	0.6	17	0.7	75	7.0
US-5	5	No. 10	1,400	236	7.1	2.4	1.1	21	0.8	75	7.0

Air Hose Size: 1/4" I.D. Air Inlet: N.P.T. 1/4"



US-350PW



US-450PW



US-652PW



US-450WB

Impact Series

Recommended Air Pressure: 85 psi

CAPACITY (SCREW SIZE)			FREE SPEED	OVERALL LENGTH		WEIGHT LESS BIT		FROM CENTER TO OUTSIDE		NOISE LEVEL	AIR USAGE
MODEL	MM	IN	RPM	MM	IN	LB	KG	MM	IN	dB(A)	CFM
Pistol											
US-350PW	4	No. 8	15,000	121	4.8	1.2	0.5	17	0.7	81	7.0
US-450PW	5	No. 10	14,000	151	5.9	1.7	0.8	17	0.7	79	7.0
US-652PW	6	1/4	9,000	155	6.1	1.9	0.9	23	0.9	79	12.4
Straight											
US-6W	6	1/4	9,500	187	7.4	1.8	0.8	22.5	0.9	85	10.5
US-450WB	5	No. 10	11,000	161	6.3	1.2	0.6	18.5	0.7	80	7.0

Air Hose Size: 1/4" I.D. Air Inlet: N.P.T. 1/4"
(R) Denotes Directional Muffled Rear Exhaust option

Recommended air pressure: 57 psi for US-350PW, US-450PW, US-6W, and US-450WB / 72 psi for US-652PW.
NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368

Signature Series SHUT-OFF IMPACT CORDLESS TOOLS

Tested and **PROVEN** to **BEAT** the competition in vibration and noise levels. These tools outperform the competition in number of rundowns per battery charge.



SHUT-OFF IMPACT TOOLS

The Signature Series Impact Shut-Off Pistol Tool can operate as a standard impact wrench or as an impact wrench with a programmable shut-off point, preventing over-torquing. These innovative tools deliver a torque range of 3–120 Nm (2–89 ft-lb). No torque reaction, coupled with the ergonomic, lightweight design and reduced vibration, helps to prevent user injury.

FEATURES AND BENEFITS

- Brushless motor provides longer motor life and increased efficiency
- Easy-to-read process information lights
- Advanced shut-off system
- LED light for work-area illumination
- Programmable buttons for easy operation
- Li-Ion battery provides long battery life
- Mini USB port for connection to optional programmer (SPC-2PGM)



MODEL	TORQUE RANGE		MAX TORQUE		FRE E SPEED	BATTERY (V)	WEIGHT		ANVIL SIZE	NOISE LEVEL dB(A)
	NM	FT-LB	NM	FT-LB			LB	KG		
SIW-P2525Q	3 - 25	2 - 18	40	30	2,400	20	2.2	1	1/4 QC	71
SIW-P3225Q	6 - 32	4 - 24	90	66	2,400	20	2.2	1	1/4 QC	71
SIW-P3238	6 - 32	4 - 24	90	66	2,400	20	2.2	1	3/8 Sq Dr	71
SIW-P5538	15 - 55	11 - 41	120	90	2,400	20	2.4	1.1	3/8 Sq Dr	71
SIW-P5550	15 - 55	11 - 41	120	90	2,400	20	2.4	1.1	1/2 Sq Dr	71
SIW-P10050	25 - 100	18 - 74	180	133	2,400	20	2.4	1.1	1/2 Sq Dr	71
SIW-P12050	30 - 120	22 - 89	210	155	2,400	20	2.9	1.3	1/2 Sq Dr	71

Shut-Off Impact Tools Include: Body Jacket, Bail, and one (1) 18V Li-Ion Battery

BATTERY AND CHARGER

The Signature Series Shut-Off Impact Tool battery features a slim profile design and a slide mount connection to the tool, which ensures durability and makes changing out batteries quick and easy.

BATTERY MODEL #	VOLTAGE / CAPACITY	TYPE
SIW-B20LI	20V, 2.0 Ah	Li-Ion
SIW-B20LI-HC	20V, 4.0 Ah	Li-Ion
CHARGER MODEL #	OUTPUT	INPUT
SIW-C18-20	18 - 20V, 4.0 A	100 - 240VAC, 50-60 Hz



SIW-B20LI

SIW-B20LI-HC



SIW-C18-20

ACCESSORIES

MODEL #	DESCRIPTION
BJ10091	Grey Body Jacket Cover
SIW-PBL	Suspension Bail
SIW-38PR	Pin Retainer Kit, 3/8" Drive
SIW-50PR	Pin Retainer Kit, 1/2" Drive



BJ10091

SIW-PBL

Signature Series PRECISION CLUTCH CORDLESS TOOLS

Quick shut-off, precision clutch minimizes torque reaction and ensures precise application of torque.

PRECISION CLUTCH TOOLS

Signature Series precision clutch tools feature a quick-releasing clutch that delivers accuracy across multiple joint types. Constructed of precision machined parts, this tool guarantees accuracy and durability over the life of the tool.

FEATURES AND BENEFITS

- LED indicator provides simple process information to the operator. The signal is visible from any angle
- Press button for easy F/R operation
- LED light for working in dark areas
- Trigger repeat protection avoids double hits on already seated screws
- Easily attached sliding battery system
- Mini USB port for connection to optional programmer (SPC-2PGM)
- Li-Ion battery pack delivers longer run time
- Ergonomic handle design provides outstanding balance and weight and is ideal for accessing hard-to-reach locations
- Angle tool enables multiple head positions



SPC-P2325Q



SPC-A21625

MODEL	TORQUE RANGE		FREE SPEED RPM RANGE (PROGRAMMABLE WITH PROGRAMMER ACCESSORY)	BATTERY VOLTAGE	TOOL WEIGHT (W/O BATTERY)		ANVIL SIZE
	NM	FT-LB			LB	KG	
Pistol*							
SPC-P2325Q	.8 - 3	.6 - 2.2	500 - 1,550	18V	2.1	.95	1/4" QC
SPC-P2625Q	1 - 6	.7 - 4.4	300 - 1,000	18V	2.1	.95	1/4" QC
SPC-P2925Q	1.5 - 9	1.1 - 6.6	300 - 800	18V	2.1	.95	1/4" QC
SPC-P21225Q	2 - 12	1.5 - 8.8	250 - 600	18V	2.1	.95	1/4" QC
Right Angle**							
SPC-A21025Q	3 - 12	2.2 - 8.8	400 - 1,000	18V	3.5	1.6	1/4" QC
SPC-A21025	3 - 12	2.2 - 8.8	400 - 1,000	18V	3.5	1.6	1/4" Sq
SPC-A21038	3 - 12	2.2 - 8.8	400 - 1,000	18V	3.5	1.6	3/8" Sq
SPC-A21625Q	5 - 18	3.7 - 13.3	300 - 600	18V	3.5	1.6	1/4" hex
SPC-A21625	5 - 18	3.7 - 13.3	300 - 600	18V	3.5	1.6	1/4" Sq
SPC-A21638	5 - 18	3.7 - 13.3	300 - 600	18V	3.5	1.6	3/8" Sq
SPC-A23038	8 - 30	5.9 - 22	250 - 480	18V	3.5	1.6	3/8" Sq
SPC-A23538	10 - 35	7.4 - 25.8	220 - 330	18V	3.5	1.6	3/8" Sq
SPC-A25038	10 - 50	7.4 - 37	200 Non-Programmable Fixed Speed***	18V	5.3	2.4	3/8" Sq
SPC-A27038	20 - 70	14.8 - 51.7	170 Non-Programmable Fixed Speed***	18V	6.3	2.9	3/8" Sq
SPC-A210050	35 - 100	26 - 74	119 Non-Programmable Fixed Speed***	18V	7.4	3.4	1/2" Sq

* Pistol Grip Tools include: Torque Adjustment Tool and one (1) 18V Li-Ion Battery

** Angle Nutrunners include: Torque Adjustment Tool, Head Indexing Spanner Wrench, and one (1) 18V Li-Ion Battery

*** High torque tools feature fixed RPM

BATTERY AND CHARGER

The AIMCO Signature Series Precision Clutch Tool battery and charging system could not be more simple. One universal battery and charger interface with all of the Signature Series Precision Clutch tools. Each tool utilizes the same lightweight 18V Li-Ion battery, which provides superior battery life. The charger accepts input AC power of 100–240VAC, making use simple anywhere in the world.



SPC-B218LI




SPC-C218-19

BATTERY MODEL #	VOLTAGE	TYPE	CAPACITY	WEIGHT
SPC-B218LI	18V	Li-Ion	2.0 Ah	.8 Lb/.4 kg
SPC-B218LI-HC	18V	Li-Ion	4.0 Ah	1.4 Lb/.64 kg
CHARGER MODEL #	OUTPUT	INPUT	DIMENSIONS (W/O BATTERY)	WEIGHT
SPC-C218-19	18V-19.2V 3.0 A	100-240VAC 50-60 Hz	6.25" deep x 5" wide x 3.5" tall 158.75 mm x 127 mm x 89 mm	1.2 Lb/.54 kg

PRECISION CLUTCH TOOL ATTACHMENTS

A wide variety of special heads and attachments can be fitted to Signature Series Angle Nutrunners. Contact your AIMCO representative for assistance, 1-503-254-6600, or toll free 1-800-852-1368.

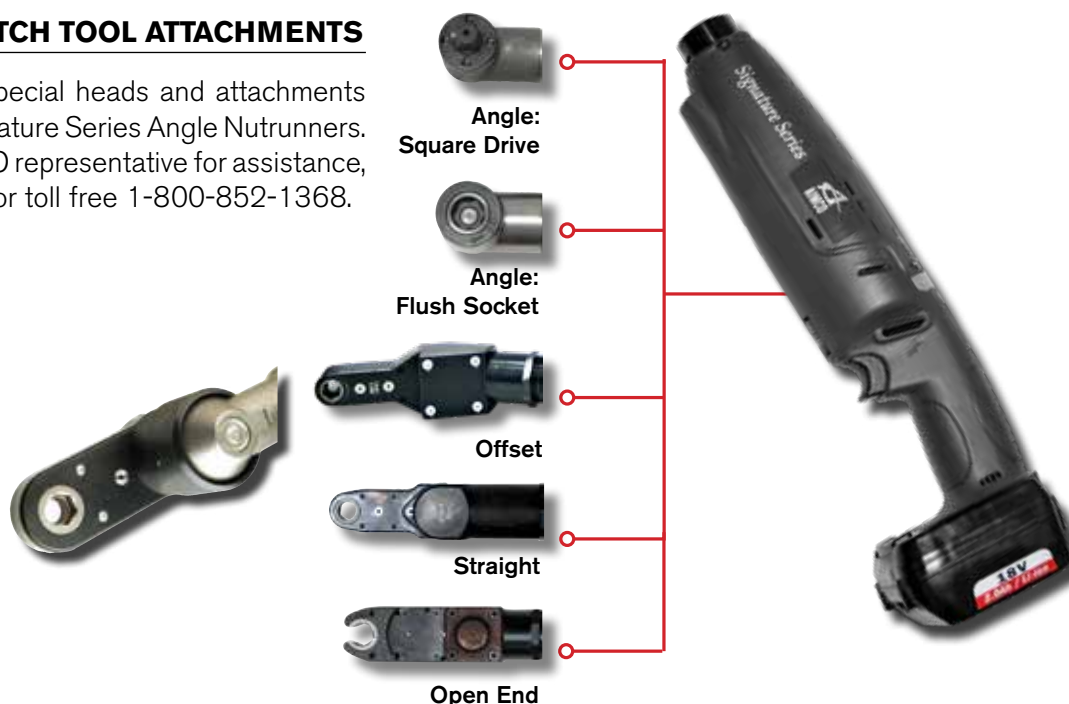

QUICK CLIP

The two piece Quick Clip comes with a belt clip and a stretch cord attachment for a pistol tool. The patented ball feature allows for quick and easy release.

SPC-QC

BODY JACKETS

Prevent damage to the workpiece.

MODEL	DESCRIPTION
 BJ10082	Clear Body Jacket for Signature Series Precision Clutch Pistol Tools
 BJ10083	Clear Body Jacket for Signature Series Precision Clutch Angle Nutrunners

TOOL SPEED PROGRAMMER

Each Signature Series battery tool has programmable features that enhance operator efficiency. Programmable features include:

- Tool speed control from minimum (1,500 rpm) to maximum (2,400 rpm) speed in 50 rpm increments
- Forward/Reverse Mode - Three setting options
- Two-stage trigger delay control
- Screw count / impact count
- Supervisor level "lock-out" control

Additionally, the Signature Series battery tool has an integrated mini USB connector that couples to the Signature Series Programmer module. Simply connect the tool to the Programmer Module and flash the tool to the desired RPM. The programmed RPM will remain until a change is desired.



SPC-2PGM

TOOL BASKETS



21226

AIMCO tool baskets can be affixed to a bench or rack and can be used for either a pistol or right angle tool.

Signature Series

Signature Series tools can be adapted to a wide range of application-specific configurations. Contact your AIMCO Customer Service Associate for assistance, 1-503-254-6600, or toll free 1-800-852-1368.

ELECTRIC SCREWDRIVERS

Electra[®] SERIES

- Available in push-to-start and lever start styles
- Ergonomic design – Lightweight, compact housings ensure operator comfort during operation
- Accurate torque control – Precise controlled fastening with automatic shut-off clutches
- External brush replacement – Virtually no down time for brush replacement
- External torque adjustment – Torque level can be easily adjusted by simply turning the external adjustment ring



AE-5681



- UL Listed and CE Certified – Drivers meet electrical safety standards in both the U.S. and Europe
- Direct plug-in style – Offers easy and convenient start-up (certain models), simply plug it in
- State-of-the-art motor design – Ensures comfortable grip temperature for operator and extended motor life

Electra[®] Series Specifications

MODEL	TORQUE RANGE		FREE SPEED	WEIGHT		LENGTH		HEX DRIVE		POWER SOURCE
	IN-LB	KGF-CM	RPM	LB	KG	IN	MM	IN	MM	
Push-To-Start Direct Plug-In Series										
AE-5681 (Includes torque cover)	3.5 - 15.6	4 - 18.0	1,000	1.2	0.5	9.3	237	1/4	6.4	115V AC*
AE-8681 (Includes pistol grip handle adapter)	15 - 45	23.0 - 51.8	600	1.6	0.7	10.6	269	1/4	6.4	115V AC*
Low-Voltage Lever Start Series (Requires External Power Supply)										POWER SUPPLY:
AE-2020	.35 - 1.3	.40 - 1.5	720	0.7	0.3	8.0	203	1/4	6.4	See page 136 for required power supplies
AE-4020	.9 - 5	1.0 - 6.0	720	0.7	0.3	8.0	203	1/4	6.4	
AE-4520	1.3 - 8.7	1.5 - 10.0	720	0.7	0.3	8.0	203	1/4	6.4	
AE-7010	6.1 - 17.4	7.0 - 20.0	750	1.4	0.6	9.3	236	1/4	6.4	
AE-8010	10.4 - 26.0	12.0 - 29.9	550	1.4	0.6	9.3	236	1/4	6.4	
Low-Voltage Push-To-Start Series (Requires External Power Supply)										POWER SUPPLY:
AE-7010PS	6.1 - 17.4	7.0 - 20.0	750	1.4	0.6	9.3	236	1/4	6.4	See page 136 for power supplies
AE-8010PS	10.4 - 26.0	12.0 - 29.9	550	1.4	0.6	9.3	236	1/4	6.4	

* 220V AC is available upon request. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.

ELECTRA[®] LOW ESD SERIES

- Grounded bit – Grounded chuck assembly routes any existing charge to ground
- Carbonized housing – Handle material and buttons are constructed of carbonized plastic throughout, enabling any charge received by the handle to be routed to ground
- Long-Lasting ESD resistant handle – Material will maintain its integrity for the life of the handle, unlike coatings or paints



AE-5681ESD



Electra[®] Low ESD Series Specifications

MODEL	TORQUE RANGE		FREE SPEED	WEIGHT		LENGTH		HEX DRIVE		POWER SOURCE
	IN-LB	KGF-CM	RPM	LB	KG	IN	MM	IN	MM	
AE-4520ESD*	1.3 - 8.7	1.5 - 10.0	720	0.9	0.4	8.0	204	1/4	6.4	35V DC
AE-5681ESD	3.5 - 15.6	4 - 18.0	1,000	1.2	0.5	9.3	237	1/4	6.4	115V AC**

* Low-voltage units require an external power supply.

** 220V AC is available upon request. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.

ELECTRIC SCREWDRIVERS

ELECTRA® SLIP CLUTCH SERIES

- High-speed performance – For quick and consistent assembly and disassembly
- Maximum ergonomics and convenience – Offers a combination of a slip clutch with a high speed motor to provide low torque reaction; one of the best power-to-weight ratios in the industry
- Added maintenance feature – LED light indicates when to change brushes. Brush cap contains a switch that shuts off the power during brush replacement
- Direct 110V plug-in – Eliminates the need for an external power supply



AE-2015



- 1/4" hex quick change chuck for easy bit changes
- External torque collar for easy torque adjustment.

Electra® Slip Clutch Series Specifications

MODEL	RECOMMENDED TORQUE RANGE		FREE SPEED	WEIGHT		LENGTH		HEX DRIVE		POWER SOURCE
	IN-LB	KGF-CM	RPM	LB	KG	IN	MM	IN	MM	
AE-2015	4.3 - 21.7	5.0 - 25.0	1,000	1.2	.55	9.2	234	1/4	6.4	110 V / 120V AC*

** 220V AC is available upon request. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.

PRECISION SERIES

- For low torque applications
- Featuring ergonomic design
- Comes with options such as long-life brushless motors and adjustable speed power supplies



AE-6300
AE-6450



STANDARD MODELS

- Optional speed control power supply – Enables infinite control from 20% to 100% of maximum tool speed and adjustable soft start to minimize cross threading
- Ergonomic housing – Oval shape conforms to hand
- Duralite – Casing material provides a secure grip
- Feather touch integrated lever reduces travel and stress. Requires only 2 mm of travel to activate
- External torque control – Twist and go

EXTENDED LIFE MODELS

- Sealed Swiss motor – For higher duty cycles, longer life, and less maintenance. Sealed casing means no brush changes are necessary
- Extended warranty on tool motor – Three year standard motor warranty
- Compact power supply – Makes setup a breeze

Precision Series Specifications

MODEL	TORQUE RANGE		FREE SPEED	WEIGHT		LENGTH		HEX DRIVE
	IN-LB	KGF-CM	RPM	LB	KG	IN	MM	IN
Standard								
AE-6300	.85 - 5.0	1.0 - 5.8	725	0.9	0.4	8.5	216	1/4
AE-6450	1.3 - 8.7	1.5 - 10.0	770	0.9	0.4	8.5	216	1/4
High Speed								
AE-6300S	.35 - 4.3	0.4 - 5.0	920	0.9	0.4	8.5	216	1/4
AE-6450S	1.3 - 8.7	1.5 - 10.0	920	0.9	0.4	8.5	216	1/4
Extended Life								
AE-6300M	1.0 - 5.5	1.1 - 6.3	550	0.9	0.4	8.5	216	1/4

ELECTRIC SCREWDRIVERS

Electra® Series Accessories – Power Supplies



MODEL	COMPATIBLE SCREWDRIVERS		TOOL RPM	VOLTAGE CONVERSION	DIMENSIONS	WEIGHT LB KG	
AE-224PS	AE-2020	AE-6300	720	110V AC - 220V AC 35V DC	2.6 x 1.6 x 5.0 66 x 41 x 127 mm	1.0	.45
	AE-2020ESD	AE-6300S					
	AE-4020	AE-6450					
	AE-4520	AE-6450S					
	AE-4520ESD						
AE-278PS	AE-7010 AE-7010PS	AE-8010 AE-8010PS	STANDARD	110V AC - 220V AC 30V DC	1.6 x 5.0 x 2.6 41 x 127 x 66 mm	1.0	.45
APM-30	AE-6300M		550	110V AC - 220V AC 30V DC	2.1 x 3.4 x 1.9 53 x 87 x 48 mm	0.4	0.2

DIGITAL FASTENING COUNTER



The AM Series fastener counter verifies and error-proofs the assembly process.

- Buzzer notifies of missing screws, incomplete fastening, and thread damage
- Counts up to 60,000 units and up to 99 screws per unit
- Connects easily to automation equipment using standard input/output signals
- Large LCD screen is easy to read. A green screen indicates OK fastening, a red screen indicates NG

MODEL	COMPATIBLE SCREWDRIVERS
AM-45	For AE-2020, AE-4020, AE-4520 Standard and ESD types
AM-65	For AE-7010, AE-7010PS, AE-8010 and AE-8010PS

OPTIONAL ACCESSORIES



Angle Head Attachments

Available for lever start series. Not available for Low ESD Series.



Pistol Grip Handle

Converts to a pistol style driver for horizontal fastening. Available for Trigger Start only (included with AE-8681).



Torque Cover

Prevents accidental torque adjustment by the operator (included with AE-5681).

ITEM	MODEL	COMPATIBLE SCREWDRIVERS
Angle Head Attachments	AE-2045A	For AE-2020, AE-4020, AE-4520
	AE-7080A	For AE-7010, AE-8010
Pistol Grip Handle	AE-PG7080	For AE-7010, AE-7010PS, AE-8010, AE-8010PS
Torque Cover	AE-TC2040	For AE-2020, AE-4020, AE-4520
	AE-TC7080	For AE-7010, AE-7010PS, AE-8010, AE-8010PS
	4H2055	For AE-8681

IMPACT TOOLS

UW-SERIES IMPACT TOOLS

UW-Series impact tools offer fast, economical operation in high-volume heavy assembly applications.



UW-6SLRDK
UW-6SLRK



UW-61ERK



UW-8SHRK



UW-9SRK



UW-10SHRK



UW-13SRK



UW-131ERK

Twin Hammer Pistol Impact Wrenches

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-6SLRDK	6	1/4	6.9 - 18	5 - 13	8,500	175	6.9	1.0	2.1	31.0	1.2	1/4 Hex	91	12.4
UW-6SLRK	6	1/4	7.8 - 19	6 - 14	8,500	175	6.9	1.0	2.1	31.0	1.2	1/4 Sq.	92	12.4
UW-61ERK	8	5/16	14 - 40	10 - 30	7,300	150	5.9	1.5	3.3	29.5	1.2	3/8 Sq.	91	12.4
UW-8SHRK	8	5/16	18 - 40	13 - 30	7,300	172	6.8	1.6	3.4	31.0	1.2	1/2 Sq.	93	14.0
UW-9SRK	10	3/8	35 - 87	26 - 64	7,000	178	7.0	1.8	3.9	34.0	1.3	1/2 Sq.	93	16.0
UW-10SHRK	12	1/2	47 - 170	35 - 125	6,000	183	7.2	2.1	4.7	30.5	1.4	1/2 Sq.	95	16.0
UW-13SRK	13	1/2	88 - 250	65 - 184	6,000	215	8.5	2.6	5.7	37.5	1.5	1/2 Sq.	95	16.0
UW-131ERK	13	1/2	84 - 260	62 - 192	5,500	205	8.1	3.0	6.5	37.5	1.5	1/2 Sq.	97	19.4

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.



UW-6SSLRDK



UW-6SSHRDK
UW-6SSHRK



UW-13SSK



UW-401L

Twin Hammer Inline Impact Wrenches

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-6SSRK	6	1/4	9.8 - 26	7 - 19	7,500	225	8.9	1.0	2.1	29.5	1.2	3/8 Sq.	91	10.5
UW-6SSLRDK	6	1/4	6.9 - 18	5 - 13	8,500	239	9.4	0.9	1.9	31.0	1.3	1/4 Hex	91	10.5
UW-6SSHRDK	8	5/16	15 - 30	11 - 22	7,300	249	9.8	1.3	2.8	27.5	1.1	1/4 Hex	91	12.4
UW-6SSHRK	8	5/16	22 - 50	16 - 37	7,300	249	9.8	1.3	2.8	27.5	1.1	3/8 Sq.	91	12.4
UW-13SSK	13	1/2	89 - 250	66 - 184	6,300	281	11.1	3.2	7.0	39.0	1.5	1/2 Sq.	97	19.4
UW-401	38	1-1/2	880 - 2,500	649 - 1,844	3,200	494	19.5	15.1	33.2	62.5	2.5	1 Sq.	110	42.4
UW-401L	38	1-1/2	790 - 2,300	583 - 1,696	3,200	654	25.8	16.5	36.3	62.5	2.5	1 Sq.	110	42.4

Air Hose Size: 3/8" I.D., 1/2" I.D. for UW-401 and UW-401L models

Air Inlet: N.P.T. 1/4"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

Impact Tools Model Number Key

UW- _SH = Pistol grip
UW- _SSH = Straight handle
UW- _CSH = Angle head
UW- _P = Pistol grip for 140 and 381 series

+

L = Long anvil
R = Rear exhaust

+

K = Lightweight
DK = Driver-type anvil, lightweight

IMPACT TOOLS



UW-6CShrk



UW-13CSK

Twin Hammer Angle Impact Wrenches

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-6CShrk	8	5/16	19 - 41	14 - 30	7,300	282	11.1	1.7	3.8	275	1.1	3/8 Sq.	94	10.5
UW-13CSK	13	1/2	75 - 200	55 - 148	6,500	374	14.7	5.2	11.4	39.0	1.5	1/2 Sq.	97	26.5

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.



UW-140P(WR)



UW-220P
UW-220PL



UW-251P



UW-381
UW-381L



UW-381P

Swing Hammer Impact Wrenches

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-140P(WR)	12	1/2	70 - 210	52 - 155	6,500	200	7.9	2.7	5.9	33.0	1.3	1/2 Sq.	93	25.0
UW-220P	19	3/4	300 - 700	221 - 516	5,500	230	9.1	2.8	9.6	42.0	1.7	3/4 Sq.	95	25.0
UW-220PL	19	3/4	300 - 700	221 - 516	5,500	350	13.8	4.4	10.3	42.0	1.7	3/4 Sq.	95	25.0
UW-251P	25	1	600 - 1,000	443 - 738	5,500	276	10.9	8.0	17.6	55.0	2.0	1 Sq.	95	28.0
UW-381	38	1-1/2	760 - 2,000	561 - 1,475	4,700	395	115.6	9.5	20.9	58.5	2.3	1 Sq.	100	31.5
UW-381L	38	1-1/2	1,400 - 2,000	1,033 - 1,475	4,700	543	21.4	10.0	20.9	58.5	2.3	1 Sq.	100	31.5
UW-381P	38	1-1/2	760 - 2,000	561 - 1,475	4,700	276	10.9	10.0	20.9	58.5	2.3	1 Sq.	99	31.5

Air Hose Size: 3/8" for UW-140P(WR)

1/2" I.D. for other models

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

Air Inlet: N.P.T. 1/4" for UW-140P(WR)

N.P.T. 3/8" for UW-220P and UW-251P series

N.P.T. 1/2" for UW-381 series



UW-550



UW-75S

Twin Hammer Jumbo Impact Wrenches

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-550	55	2-1/4	2,500 - 5,800	1,844 - 4,278	3,500	525	20.7	36.0	79.0	78.0	3.1	1-1/2 Sq.	112	79.0
UW-75S	76	3	7,800 - 17,000	5,753 - 12,539	1,400	670	26.4	56.0	123.0	96.0	3.8	1-1/2 Sq.	112	114.0

Air Hose Size: 3/4" I.D.

Air Inlet: N.P.T. 1"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

Stud Bolt Wrench

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR.	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-ST6SHK	8	5/16	22 - 49	16 - 36	6,500	170	6.7	1.7	3.7	24.0	1.0	3/8 Sq.	92	14.0

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.



UW-ST6SHK

GRINDERS



UAG-40SBL-136



UAG-50SBL-109
UAG-50SBL-120



UAG-70SBL-76



UAG-90SBL-59

Angle Grinders

Recommended Air Pressure: 85 psi

MODEL*	CAPACITY (WHEEL SIZE) IN	SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH MM IN	OVERALL HEIGHT MM IN	WEIGHT KG LB	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
UAG-40SBL-136	4	13,600	1.0	246 9.7	76 3.0	1.3 2.9	84	34.0
UAG-50SBL-109	5	10,900	1.0	246 9.7	76 3.0	1.4 3.1	82	34.0
UAG-50SBL-120	5	12,000	1.0	246 9.7	76 3.0	1.4 3.1	82	34.0
UAG-70SBL-76	7	7,600	2.0	300 11.8	98 3.9	2.9 6.4	83	57.0
UAG-90SBL-59	9	5,900	2.5	308 12.1	98 3.9	3.3 7.3	88	67.0



UG-25NA




UG-38N



UG-38NA



UG-38NL



UG-38NS



UG-50S-200
UG-60S-29



UG-45H

Die Grinders

Recommended Air Pressure: 85 psi

MODEL*	COLLET CHUCK SIZE IN	SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH MM IN	WEIGHT KG LB	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
UG-25NA	1/4	23,500	0.3	153 6.0	0.5 1.2	82	10.7
UG-38N	1/4	25,000	0.4	164 6.5	0.6 1.3	85	10.7
UG-38NA	1/4	22,000	0.4	165 6.5	0.7 1.4	75	14.0
UG-38NL	1/4	21,000	0.4	317 12.5	0.9 2.0	85	10.7
UG-38NS	1/4	25,000	0.4	174 6.8	0.6 1.3	85	10.7
UG-50S-200	1/4	23,000	0.3	198 7.8	0.6 1.3	73	14.0
UG-45H	1/4	18,000	0.5	196 7.7	0.8 1.8	76	22.0
UG-60S-29*	1/4	2,900	0.5	227 8.9	1.1 2.3	77	18.0

* UG-60S-29 includes spanner wrench to tighten collet

Mini Angle Die Grinders

Recommended Air Pressure: 85 psi

MODEL*	COLLET CHUCK SIZE IN	SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH MM IN	OVERALL HEIGHT MM IN	WEIGHT KG LB	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
UG-20A-200	1/4	20,000	0.2	131 5.2	80 3.2	0.5 1.1	75	10.7
UG-20A-120	1/4	12,000	0.2	131 5.2	80 3.2	0.5 1.1	76	10.7
UG-50S-200A	1/4	20,000	0.3	195 7.7	87 3.4	0.9 2.0	75	14.0



UG-20A-120
UG-20A-200



UG-50S-200A



UG-65EB



UG-65EBL



UG-650EL

Lightweight Grinders

Recommended Air Pressure: 85 psi

MODEL*	CAPACITY (WHEEL SIZE) IN	SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH MM IN	WEIGHT KG LB	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
UG-65EB	2.5	14,600	0.6	242 9.8	1.3 2.8	95	22.0
UG-65EBL	2.5	14,600	0.6	272 10.7	1.4 3.1	95	22.0
UG-650EL	2.5	14,600	0.6	420 16.5	1.6 3.4	85	22.0

Horizontal Grinder

Recommended Air Pressure: 85 psi

MODEL	CAPACITY (WHEEL SIZE) IN	SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH MM IN	WEIGHT KG LB	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
UG-1250L-72	5	7,200	1.0	436 17.2	2.8 6.2	88	32.7



UG-1250L-72

*Air Hose Size: 3/8" I.D. - 1/2" I.D. (UG-1250L-72)

Air Inlet: N.P.T. 1/4" - N.P.T. 3/8" (UAG-90SBL-59 and UG-1250L-72)

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

SANDERS AND DRILLS

Sander

Recommended Air Pressure: 85 psi

MODEL	CAPACITY (WHEEL SIZE)		SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH		WEIGHT		NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
	IN				MM	IN	KG	LB		
UP-25DB	5		10,000	0.3	212	8.3	1.7	3.7	73	7.0

Air Hose Size: 3/8" I.D. Air Inlet: N.P.T. 1/4" NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.



UP-25DB



UD-50-22
UD-50-200



UD-50-45



UD-60-04
UD-60-07



UD-60-15
UD-60-20



UD-60-29



UD-80-04
UD-80-07



UD-80-12



UD-50S-22
UD-50S-45



UD-60S-15
UD-60S-29



UD-50S-45A
UD-50S-45A*



UD-60S-15C
UD-60S-29C

Drills

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		SPEED RPM	OVERALL LENGTH		WEIGHT WITH CHUCK		FROM CENTER TO OUTSIDE		NOMINAL CHUCK SIZE IN	TYPE OF SPINDLE IN-THR'D	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
	MM	IN		MM	IN	KG	LB	MM	IN				

Pistol

UD-50-200	3	1/8	23,000	135	5.3	0.7	1.5	21.0	0.8	5/16	3/8-24UNF	73	14
UD-50-45	6	1/4	5,000	145	5.7	0.9	1.9	21.0	0.8	5/16	3/8-24UNF	72	14
UD-50-22	8	5/16	2,200	140	5.5	0.9	2.0	21.0	0.8	5/16	3/8-24UNF	72	14
UD-60-29	8	5/16	2,900	167	6.6	1.1	2.4	22.5	0.9	5/16	3/8-24UNF	77	18
UD-60-20	8	5/16	2,000	180	7.1	1.2	2.6	22.5	0.9	5/16	3/8-24UNF	77	18
UD-60-15	8	5/16	1,600	180	7.1	1.2	2.6	22.5	0.9	5/16	3/8-24UNF	76	18
UD-60-07	13	1/2	700	219	8.6	1.4	3.1	22.5	0.9	1/2	1/2-20UNF	75	18
UD-60-04	13	1/2	500	220	8.6	1.4	3.1	22.5	0.9	1/2	1/2-20UNF	75	18
UD-80-12	13	1/2	1,200	216	8.5	1.8	4.0	26.0	1.0	1/2	1/2-20UNF	79	23
UD-80-07	13	1/2	700	239	9.4	2.3	5.1	26.0	1.0	1/2	1/2-20UNF	79	23
UD-80-04	16	5/8	400	247	9.7	2.9	6.4	26.0	1.0	5/8	5/8-16UNF	79	23

Inline

UD-50S-45	6	1/4	5,000	210	8.3	0.9	1.9	21.0	0.8	5/16	3/8-24UNF	77	14
UD-50S-22	8	5/16	2,200	205	8.1	0.8	1.8	21.0	0.8	5/16	3/8-24UNF	77	14
UD-60S-29	8	5/16	2,900	227	8.9	1.1	2.3	22.5	0.9	5/16	3/8-24UNF	77	18
UD-60S-15	8	5/16	1,600	238	9.4	1.2	2.5	22.5	0.9	5/16	3/8-24UNF	77	18

Angle


UD-50S-45A	4	#8	5,000	253	10	0.9	1.98	21.0	0.8	-	1/4-28UNF	79	14
UD-50S-45A*	4	#8	5,000	253	10	0.9	1.98	21.0	0.8	-	1/4-28UNF	79	14
UD-60S-29C	8	5/16	2,900	276	10.9	1.5	3.3	22.5	0.9	5/16	3/8-24UNF	79	18
UD-60S-15C	8	5/16	1,600	283	11.1	1.6	3.5	22.5	0.9	5/16	3/8-24UNF	79	18

* UD-50S-45A* comes with a cone jaw chuck installed.

Air Hose Size: 3/8" I.D. Air Inlet: N.P.T. 1/4"

NOTE: Other models are available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

PERCUSSION TOOLS

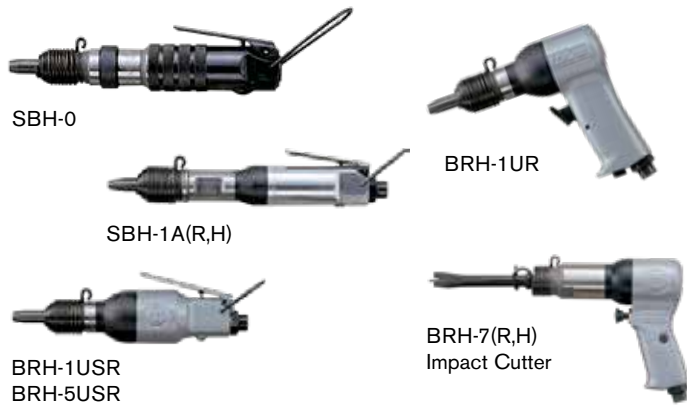

Low-Vibration Type



Riveting Hammers / Impact Cutter


Recommended Air Pressure: 85 psi

MODEL	CAPACITY DURALUMIN IN	STEEL IN	BLOW PER MIN. BPM	OVERALL LENGTH MM	IN	WEIGHT KG	LB	PISTON DIAMETER MM	IN	PISTON STROKE MM	IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
Standard Type													
SBH-0	#2	—	6,500	123	4.8	0.3	0.7	10.0	0.4	23	0.9	90	3.5
SBH-1A(R,H)*	#3	—	4,000	209	8.2	0.9	1.9	11.1	0.4	56	2.2	92	5.0
BRH-1UR	#5	#3	2,800	122	4.9	1.1	2.4	14.3	0.6	38	1.5	95	12.0
BRH-1USR	#5	#3	2,800	180	7.1	1.0	2.2	14.3	0.6	38	1.5	95	12.0
BRH-5USR	1/4	#10	1,800	246	9.7	1.5	3.2	12.7	0.5	100	4.0	95	13.0
Low-Vibration Type													
BRH-1UD	#5	#3	2,800	122	4.9	1.1	2.4	14.3	0.6	38	1.5	95	12.0
BRH-5UD	1/4	#10	1,800	189	7.4	1.4	3.1	12.7	0.5	100	4.0	95	13.0
BRH-1USD	#5	#3	2,800	143	5.6	1.4	3.1	14.3	0.6	38	1.5	95	12.0
BRH-5USD	1/4	#10	2,800	211	10.7	1.7	3.6	12.7	0.6	100	1.5	95	12.0
Impact Cutter													
BRH-7(R,H)*	—	—	3,400	168	6.6	1.6	3.6	19.1	0.8	50	2.0	100	17.0

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

* R - Round Bushing H - Hex Bushing

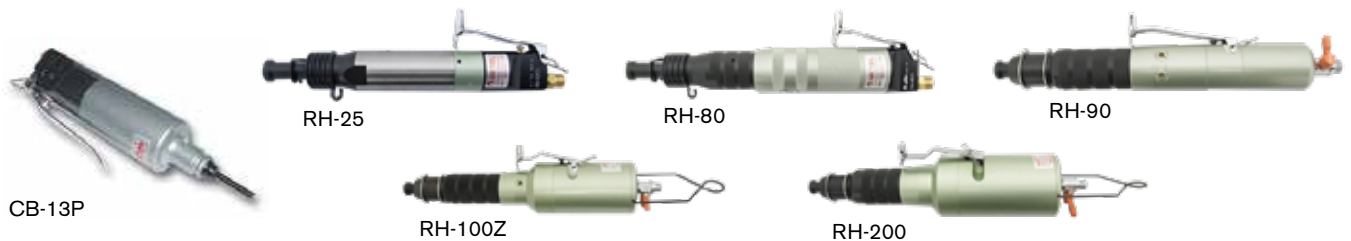

One Shot Hammers

Recommended Air Pressure: 85 psi

MODEL	BLOW POWER LB	RIVET SET DIA X LENGTH IN	SHANK DIAMETER MM	IN	STROKE MM	IN	LENGTH MM	IN	WEIGHT LB	KG
CB-13P	1.7	4.04 x 9.86	—	—	3.0	0.12	185	7.3	0.7	0.3
RH-25	20.4	—	10.2	0.401	29.8	1.2	213	8.4	2.0	0.9
RH-80	27.6	—	10.2	0.401	29.8	1.2	254	10.0	2.9	0.3
RH-90	103	—	10.2	0.401	29.8	1.2	328	12.9	3.5	1.6
RH-100Z	78.1	—	10.2	0.401	29.8	1.2	328	12.9	3.9	1.8
RH-200	139	—	10.2	0.401	39.8	1.2	341	13.4	4.6	2.1

Air Hose Size: 3/8" I.D. Air Inlet: N.P.T. 1/4" NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

SCREW PRESENTERS: OVERVIEW

For semi-automated assembly, look no further – AIMCO's Acra-Feed screw presenters provide:

PRODUCTIVITY

- One hand operation eliminates manual handling of screws
- Screw is presented to operator for easy magnetic or vacuum pickup
- Keeps workspace clear of dropped fasteners
- Quick feed rate from oscillating hopper design – up to two (2) screws per second
- Large hopper holds approximately 1,000 – 1,500 fasteners
- Solid design – no tie downs or straps required

FLEXIBILITY

- Perfect for contract or dedicated assembly
- Switch rails in minutes for different screw sizes

ERGONOMICS

- Allows for fewer arm and hand movements

RELIABILITY

- Heavy duty industrial design
- Modular design for easy repairs

QUALITY

- Uses existing or our new torque control drivers
- Keeps stray fasteners from getting into assemblies



Acra-Feed® Screw Presenter

ACRA-FEED®

FASTENING IN 3 EASY STEPS



1 Load screws into the hopper. There is no side to load unit and no gates to limit capacity.



2 Address screw with magnetized bit.




3 Bring screw to workpiece and fasten parts.

A-50 SCREW PRESENTERS



A-50BRBT-1
Robotic Screw
Presenter



A-50BRBTC-4
Compact Robotic
Screw Presenter



A-50B-1
Standard Screw Presenter



Standard Screw Presenters

MODEL	ADDITIONAL RAIL PART NO.	SCREW SIZE		MAX SCREW LENGTH	
		IN	MM	IN	MM
A-50A-0	AR-0	#0	1.4	.39	10
A-50A-1.7	AR-1.7	-	1.7	.39	10
A-50B-1	BR-1	#1	2.0	.75	18
A-50B-2	BR-2	#2	2.3	.75	18
A-50B-3	BR-3	#3	2.6	.75	18
A-50B-4	BR-4	#4	3.0	.75	18
A-50C-6	CR-6	#6	3.5	.75	18
A-50C-8	CR-8	#6-8	4.0	.75	18
A-50C-10	CR-10	#10	5.0	.75	18

Dimensions: 5.1" (W) x 8.5" (L) x 5.3" (H) Weight: 7.0 lb.

Robotic Screw Presenters

MODEL	ADDITIONAL RAIL PART NO.	SCREW SIZE		MAX SCREW LENGTH	
		IN	MM	IN	MM
A-50ARB-0	AR-RBT-0	#0	1.4	.39	10
A-50ARB-1.7	AR-RBT-1.7	-	1.7	.39	10
A-50BRBT-1	BR-RBT-1	#1	2.0	.70	18
A-50BRBT-2	BR-RBT-2	#2	2.3	.70	18
A-50BRBT-3	BR-RBT-3	#3	2.6	.70	18
A-50BRBT-4	BR-RBT-4	#4	3.0	.70	18
A-50CRBT-6	CR-RBT-6	#6	3.5	.70	18
A-50CRBT-8	CR-RBT-8	#6-8	4.0	.70	18
A-50CRBT-10	CR-RBT-10	#10	5.0	.70	18

Dimensions: 5.1" (W) x 10.8" (L) x 5.3" (H) Weight: 9.2 lb.

Compact Robotic Screw Presenters

MODEL	ADDITIONAL RAIL PART NO.	NOMINAL SCREW SIZE		MAX SCREW LENGTH	
		IN	MM	IN	MM
A-50ARBTC-0	AR-RBTC-0	#0	1.4	.390	10
A-50ARBTC-1.7	AR-RBTC-1.7	-	1.7	.390	10
A-50BRBTC-1	BR-RBTC-1	#1	2.0	.700	18
A-50BRBTC-2	BR-RBTC-2	#2	2.3	.700	18
A-50BRBTC-3	BR-RBTC-3	#3	2.6	.700	18
A-50BRBTC-4	BR-RBTC-4	#4	3.0	.700	18
A-50CRBTC-6	CR-RBTC-6	#6	3.5	.700	18
A-50CRBTC-8	CR-RBTC-8	#6-8	4.0	.700	18
A-50CRBTC-10	CR-RBTC-10	#10	5.0	.700	18

Dimensions: 7.2" (L) x 4.9" (W) x 5.7" (H) Weight: 6.7 lb.

Optional Accessories

MODEL	PART NO.
Mag-O-Net Bit Magnetizer	AM1/4Z, AM5Z, AM3/16Z, AM5/16Z

WHICH TO USE...?

Standard Screw Presenters

For manual assembly stations where the operator must otherwise pick up and hold fasteners by hand.

Robotic Screw Presenters

For automated fastening systems or manual systems using vacuum assist to pick up non-ferrous fasteners.

Compact Robotic Screw Presenters

For automated systems, or manual systems, using vacuum-assist to pick up nonferrous fasteners when work space is limited,

ACRA-FEED AUTOMATIC SCREW FEED SYSTEMS

Reduces Cycle Time By Approximately Two Seconds Per Fastener

FEATURES AND BENEFITS

- Delivers fastener directly to the driver
- For #2 - #10 fasteners, up to 1 inch long
- Available for captive washer type screws (A315V)
- Feed speed of up to 1 screw per second
- System includes feeder, hose assembly, air screwdriver, and FRL

PRODUCTIVE

- Eliminates reaching for fasteners
- Most jams are easily cleared on the line
- Frees operator's hand for productive use
- Large hopper holds between 1,000 – 5,000 fasteners

ERGONOMIC

- Eliminates manual handling of fasteners and shavings
- Reduces workspace clutter
- Keeps workspace clean of dropped fasteners
- Torque reaction of standard driver is minimal and can be eliminated with optional Ergo-Arm

RELIABLE

- Longest warranty in the industry – 3 years
- Rocking Bar design only operates as needed
- “Photo eyes” maximize motor life
- Design eliminates burrs and shavings by minimal handling of the fastener
- Durable head assembly lasts for years
- There are more Acra-Feed systems in use than any other system



MODEL	APPLICABLE SCREWS	SCREW LENGTH		HOPPER CAPACITY	MAX FASTENING SPEED	WEIGHT (LB)	DIMENSIONS L X W X H (IN)
		IN	MM				
A2100 Series	M2-M5 (#2 - #10)	1/4-1	6-25	1,500cc (1,000-5,000 pcs)*	60 screws/min*	68	7 x 17 x 16
A315V Series	M2-M5 (#2 - #10)	1/4-1	6-25	450cc (500-2,500 pcs)*	60 screws/min*	74	10 x 21 x 16

* Dependent on screw size

Delivery Hose: 10 ft


Air Pressure: 85 psi

Power: AC 110V, 20W, AC 220V by request. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.

HOW TO ORDER: Acra-Feed systems are application-specific and configured to the unique workpiece and requirements of the user. Quotations are provided from a review of sample workpieces, 25 fasteners, and required torque specifications.

ERGO ARM TOOL SUPPORT SYSTEMS

ERGO ARMS

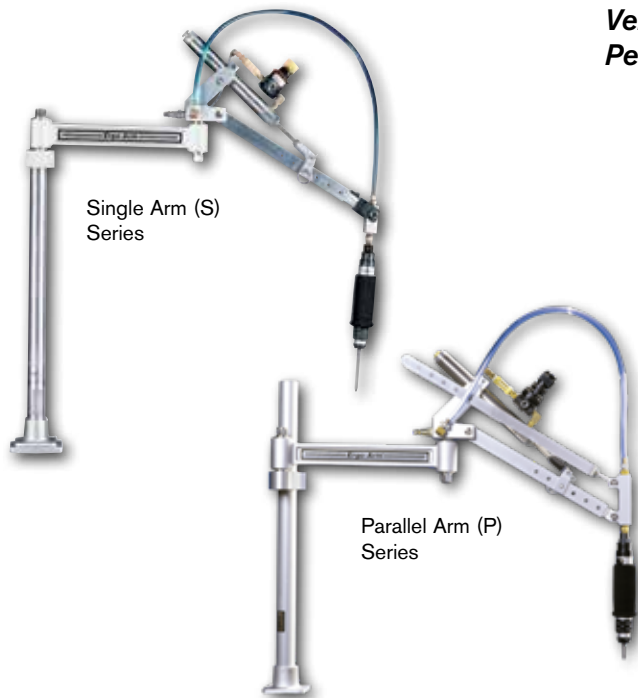

Versatile Ergo Arms Absorb Torque Reaction while Perfectly Balancing Tool Weight


AIMCO's Ergo Arms reduce operator fatigue for electric and pneumatic tools. The versatile, easy-to-assemble kits include both single and parallel rails for customizing tool rigidity to the customer's preference.

The durable, lightweight construction provides minimal resistance and low inertia during high-cycle use. The adjustable height, length, and elbowed joint increases accessibility with minimal travel to the fastening application.

Tools recommended for use with this arm:

- AcraDyne 1000 and 2000 Series
- Uryu LT Series Pneumatic Screwdrivers
- Electra Electric Screwdrivers
- Inline Tools

SPECIAL FEATURES OF ERGO ARMS

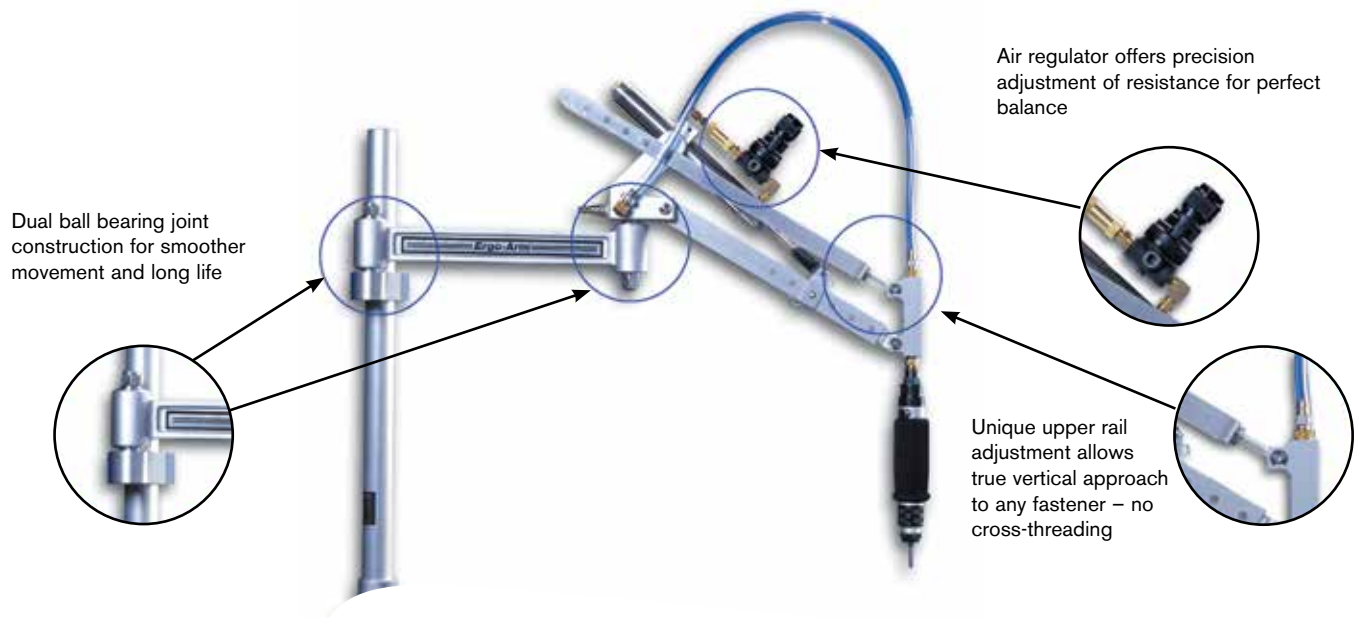

ERGO ARM TOOL SUPPORT SYSTEMS

ERGO ARM FEATURES AND BENEFITS



PARALLEL ARM SERIES

AD-D1098-P, AD-D1098-PAC, AD-D1098-PACE

- Allows for freedom of movement
- Vertical adjustment eliminates cross-threading
- Fixtured tool increases repeatability
- Adjustable reach
- Available in air or oil cylinder models
- Electric tool mount standard on PACE model

SINGLE ARM SERIES

AD-D1098-S, AD-D1098-SAC

- Full tool rotation
- Allows for freedom of movement
- Adjustable reach
- Compatible with automatic screw feeder
- Available in air or oil cylinder models

MODEL	ARM STYLE	TOOL MOUNT	IN	REACH MM	LB	CAPACITY KG	MAXIMUM TORQUE* IN-LB	NM
AIR CYLINDER SERIES								
AD-D1098-SAC	Single	Air manifold	4 - 33	102 - 838	0 - 15	0 - 7	110	12
AD-D1098-PAC	Parallel	Air manifold	4 - 33	102 - 838	0 - 15	0 - 7	110	12
AD-D1098-PACE	Parallel	Electric	4 - 33	102 - 838	0 - 15	0 - 7	110	12
OIL CYLINDER SERIES								
AD-D1098-S	Single	Air manifold**	4 - 33	102 - 838	0 - 15	0 - 7	110	12
AD-D1098-P	Parallel	Air manifold	4 - 33	102 - 838	0 - 15	0 - 7	110	12

* Max torque allowed may be dependent on tool clutch type and joint rate

** For single arm electric tool mount, order EAP-202ED-KIT

LINEAR ARMS

ALA AND AFA SERIES LINEAR ARMS



Ergonomic Support for Electric and Pneumatic Tools Reduces Operator Fatigue

AIMCO's linear arms are lightweight and designed for smooth and easy handling of electric and pneumatic tools. Arms are available in torque ranges of 5 Nm to 400 Nm and with reaches ranging from 12.5 in. to 36 in.

The ALA Series (AIMCO Linear Arm) is constructed with precision linear slides and bearings for precise tool movements. The AFA Series (AIMCO Folding Arm) is configured with aluminum alloy beams connected by an elbow joint for working with tools in tight spaces.

Tools recommended for use with this arm:

- AcraDyne 1000 and 2000 Series
- Uryu LT Series Pneumatic Screwdrivers
- Electra Electric Screwdrivers
- Inline Tools

FEATURES AND BENEFITS

ALA Series

- Constructed of lightweight aluminum
- Improves fastening quality and productivity
- Maintains Perpendicularity of the tool to the application
- Absorbs torque reaction
- Counterbalances tool mass

AFA Series

- All features of the ALA Series
- Folding elbow joint allows for closer reach to post for tight workspaces

MODEL	MAX. TORQUE		MAX. TOOL WEIGHT		REACH		TOOL DIAMETER	
	NM	FT-LB	KG	LB	MM	IN	MM	IN
ALA Series Linear Arm								
ALA5-200	5	3.7	2	4.4	317 - 519	12.5 - 20.4	23 - 40	1.0 - 1.6
ALA15-200	15	11.1	3	6.6	317 - 519	12.5 - 20.4	23 - 40	1.0 - 1.6
ALA10-400	10	7.4	2	4.4	517 - 919	20.4 - 36.2	23 - 40	1.0 - 1.6
ALA40-300	40	29.5	3	6.6	417 - 719	16.4 - 28.3	32 - 47	1.3 - 1.9
ALA200-400	200	147.5	10	22.0	517 - 919	20.4 - 36.2		
ALA400-400	400	295	20	44.0	517 - 919	20.4 - 36.2		
AFA Series With Folding Arm								
AFA5-400	5	3.7	2	4.4	0 - 470	0 - 18.5	23 - 40	1.0 - 1.6
AFA15-400	15	11.1	3	6.6	0 - 470	0 - 18.5	23 - 40	1.0 - 1.6
AFA10-550	10	7.4	2	4.4	0 - 620	0 - 24.2	23 - 40	1.0 - 1.6

JIB ARMS

ABMJ SERIES BENCH-MOUNT JIB ARMS



ABMJ Series

Customize Bench-Mount Jib Arms to Meet all Application Requirements

AIMCO's Bench Mount Jibs Arms (ABMJ Series) include a jib, two sliding trolleys, and a base – just attach an AIMCO telescopic or anti-rotation torque arm or torque tube for a completely customized system.

Tools recommended for use with this arm:

- Tool Balancers (ASB/TW Series)
- ACA Series Telescoping Carbon Arms

FEATURES AND BENEFITS

- Constructed of lightweight aluminum
- Two-Point secure for horizontal job for sound structure and safety
- Includes 2 sliding trolleys and base plate for easy mounting
- As many as 4 beams can be attached to a pillar
- Adjustable height adjustment for jib mount

Carbon Arm, Tool, and Balancer shown for concept. Items sold separately



MODEL	HEIGHT		BEAM LENGTH		MAX. TOOL WEIGHT		PIVOT RANGE
	MM	IN	MM	IN	KG	LB	
ABMJ Series - Bench-Mount Jib Arm							
ABMJ 1200-600	1,200	47.2	600	23.6	6	13.2	180°
ABMJ 1200-1000	1,200	47.2	1,000	39.4	6	13.2	180°
ABMJ 2000-1000	1,200	47.2	1,000	39.4	4	8.8	180°

CARBON TORQUE ARMS

ACA SERIES TELESCOPIC CARBON ARMS



Telescopic Torque Reaction Arms Provide Complete Ergonomics in the Hand-Tightening Phase


ACA Series Carbon Arms are lightweight, yet strong devices designed to absorb torque reactive forces. Highly flexible and modular, they adapt to a wide range of tools, and eliminate hazards to operators during fastening processes.

Tools recommended for use with this arm:

- Continuous Drive Electric and Pneumatic Tools
- Pulse Tools
- Screwdrivers

FEATURES AND BENEFITS

- Absorb torque reaction from continuous drive tools
- Counter balance tool weight when configured with AIMCO's wide array of tool balancers or with integrated balancer kits
- Orient tool correctly to the workpiece to improve efficiency and reduce operator effort in alignment to the fastener



MODEL	MIN. LENGTH MM	MAX. LENGTH MM	MAX TORQUE NM
ACA10-1000	495	1,105	10
ACA10-1500	665	1,605	10
ACA15-1000	486	1,066	15
ACA15-1500	646	1,556	15
ACA15-2000	806	2,046	15
ACA40-1000	486	1,066	40
ACA40-1500	646	1,556	40
ACA40-2000	806	2,046	40
ACA40-2500	986	2,576	40
ACA80-1500	658	1,586	80
ACA80-2000	828	2,078	80
ACA80-2500	998	2,588	80
ACA150-1500	668	1,578	150
ACA150-2000	838	1,918	150
ACA150-2500	1003	2,248	150
ACA220-1500	668	1,578	220
ACA220-2000	838	2,088	220
ACA220-2500	1,003	2,588	220



MODEL	MIN. LENGTH MM	MAX. LENGTH MM	MAX TORQUE NM
ACA-V15-1000	777	1,345	15
ACA-V15-1500	937	1,835	15
ACA-V15-2000	1,097	2,325	15
ACA-V40-1000	777	1,345	40
ACA-V40-1500	937	1,835	40
ACA-V40-2000	1,097	2,325	40
ACA-V40-2500	1,277	2,855	40
ACA-V80-1500	949	1,865	80
ACA-V80-2000	1,119	2,357	80
ACA-V80-2500	1,289	2,867	80
ACA-V150-1500	960	1,957.5	150
ACA-V150-2000	1,129	2,357	150
ACA-V150-2500	1,294	2,862	150
ACA-V220-1500	960	1,957.5	220
ACA-V220-2000	1,129	2,357	220
ACA-V220-2500	1,294	2,867	220

CARBON TORQUE ARMS

ACA-P2 CARBON SMART ARM



ACA-P240-2500

**ACA-P2 Series
X,Y Axis Encoders**
(Requires ACA-POSIX System or
AcraDyne's Gen IV Smart Arm System)

MODEL	MIN. LENGTH MM	MAX. LENGTH MM	MAX TORQUE NM
ACA-P215-1000	647	1,227	15
ACA-P215-1500	803	1,713	15
ACA-P215-2000	977	2,227	15
ACA-P240-1000	647	1,227	40
ACA-P240-1500	803	1,713	40
ACA-P240-2000	977	2,227	40
ACA-P240-2500	1,157	2,737	40
ACA-P280-1500	830	1,757	80
ACA-P280-2000	1,000	2,249	80
ACA-P280-2500	1,169	2,760	80
ACA-P2150-1500	839	1,749	150
ACA-P2150-2000	1,009	2,087	150
ACA-P2150-2500	1,174	2,419	150
ACA-P2220-1500	839	1,749	220
ACA-P2220-2000	1,009	2,259	220
ACA-P2220-2500	1,174	2,760	220



**Balancer Kits
For ACA-P2 Series**

MODEL	MIN. CAPACITY (KG)	MAX. CAPACITY (KG)
ACA-P2BK-4	2	4
ACA-P2BK-6	4	6
ACA-P2BK-8	6	8
ACA-P2BK-10	8	10
ACA-P2BK-14	10	14

Encoder Options for ACA-P2 Smart Arm

ACRADYNE GEN IV SMART ARM SYSTEM WITH PROCESS VISUALIZATION

AcraDyne's Gen IV controller with smart arm capability and process visualization provides an advanced error-proofing solution to ensure the quality of your fastening operation. The capability is integrated into the Gen IV controller – no need for an external PC or software. See page 16 for more details.



FEATURES AND BENEFITS

- Easy to follow visual guidance directly on the Gen IV controller graphical screen
- Easy to program and set up
- Low cost solution vs. competitive offerings
- Modular – can be added at any time to an existing AcraDyne system using the Gen IV controller

ACA-POSIX POSITIONING SYSTEM

The compact, self-contained ACA-Posix process visualization system guides operators through their assigned tasks. It connects to ACA-P2 series arms with integrated balancer kits.



FEATURES AND BENEFITS

- Intuitive and simple programming on 7" color LCD touch-screen display
- Store up to 500 unique assembly sequences
- Communicates directly with Power Tool controllers over digital I/O
- Store and display product images or CAD drawings. Images/drawings are displayed with targeting sequences to direct operators easily through their task
- Output for synchronizing with line controls

CARBON TORQUE ARMS

TOOL HOLDERS FOR TELESCOPING CARBON ARMS

Tool Holders For AcraDyne Tools

MODEL	DESCRIPTION
ACAH-40PS1000	Tool holder for carbon fiber arm, AcraDyne 1000 series pistol/straight tools, 40 Nm
ACAH-80PS3-5000	Tool holder for carbon fiber arm, AcraDyne 3000/5000 series pistol/straight tools, 80 Nm
ACAH-150PS3-5000	Tool holder for carbon fiber arm, AcraDyne 3000/5000 series pistol/straight tools, 150 Nm

General Tool Holders

	MODEL	DESCRIPTION	MIN. TOOL GRIP (MM)	MAX. TOOL GRIP (MM)
FOR TELESCOPIC ARMS				
Base Tool Holders				
	ACAH-15	Base tool holder 4 screws	27	45
	ACAH-40-80	Base tool holder 4 screws	30	60
	ACAH-150-220	Base tool holder 4 screws	40	70
Multi-Position Tool Holders				
	ACAH-15-MPE2745	Multi-position tool holder interface	27	45
	ACAH-150220-MPE4070	Multi position tool holder	40	70
	ACAH-4080-MPE2745	Multi-position tool holder	27	45
Swivel Tool Holders				
	ACAH-S154080	Swivel tool holder 20 to 35 mm	20	35
	ACAH-SL15150	Swivel tool holder 40 to 55 mm	40	55



CARBON TORQUE TUBES

ACTT & ACPTT SERIES CARBON TORQUE TUBES



ACPTT Series
Anti-Rotation Torque
Tube with articulation
support

Carbon Torque Tubes Are Universal Arms With an Exclusive Design For Maximum Tightening Flexibility

ACCT and ACPTT series carbon torque tubes provide smooth and accurate tool travel from bearing splined shaft construction. These sturdy arms are available in torque ranges of 15 – 80 Nm. They can be used with a variety of tool holders.

ACTT Series
Anti-Rotation Torque Tube

Tools recommended for use with this arm:

- Continuous Drive Electric and Pneumatic Tools
- Pulse Tools



ACTT-V40-850 300

FEATURES AND BENEFITS

- Universal arm with an exclusive design for maximum tightening flexibility
- Provides articulated anti-rotation support when torque reaction is parallel to arm axis

ACTT Series Torque Tubes

MODEL	MIN. LENGTH MM	MAX. LENGTH MM	MAX TORQUE NM
ACTT-V15-600 150	150	600	15
ACTT-V15-800 300	300	800	15
ACTT-V40-600 150	150	600	40
ACTT-V40-850 300	300	850	40
ACTT-V40-1500 600	600	1,500	40
ACTT-V80-900 300	300	900	80
ACTT-V80-1500 600	600	1,500	80
ACTT-V80-2100 900	900	2,100	80

CARBON TORQUE TUBES

ACPTT SERIES CARBON TORQUE TUBES FOR ACSA ARTICULATING SUPPORT ARMS

ACPTT TORQUE TUBES



FEATURES AND BENEFITS

- ACPTT arm designed for use with the ACSA articulating support arm
- ACPTT carbon torque tube provides articulated anti-rotation support when torque reaction is parallel to arm axis
- The ACPTT/ACSA articulating support arm system allows torque reaction arm installation when the workplace can't accommodate suspended overhead structures

MODEL	MIN. LENGTH MM	MAX. LENGTH MM	MAX TORQUE NM
ACPTT-V15-510 150	150	600	15
ACPTT-V15-710 300	300	800	15
ACPTT-V40-510 150	150	600	40
ACPTT-V40-760 300	300	850	40
ACPTT-V40-1410 600	600	1,500	40
ACPTT-V80-810 300	300	900	80
ACPTT-V80-1410 600	600	1,500	80



ACSA ARTICULATING SUPPORT ARM

ACPTT Torque Tube*

MODEL	MAX REACH MM	MAX HEIGHT MM	MAX TORQUE NM
ACSA-600-1500	600	1,500	80
ACSA-800-1500	800	1,500	80
ACSA-1000-1500	1,000	1,500	80

* Support arm, torque tube, balancer, tool holder, and tool shown for concept. Items sold separately

Tool Holders For ACTT & ACPTT Anti-Rotation Carbon Arms



MODEL	DESCRIPTION	MIN. TOOL GRIP (MM)	MAX. TOOL GRIP (MM)
ACAHTT-15A-3060	Angle Tool Holder, 15 Nm Arm	30	60
ACAHTT-15S-2745	Straight Tool Holder, 15 Nm Arm	27	45
ACAHTT-4080A-3165	Angle Tool Holder, 40/80 Nm Arms	31	65
ACAHTT-40S-2745	Straight Tool Holder, 40/80 Nm Arms	27	45

GCI TORQUE REACTION ARMS

GCI ARTICULATING TORQUE ARMS



Rugged Flexibility for Even the Most Complex Torque Applications

Constructed of durable aluminum, steel, or carbon fiber, GCI Torque Arms are available with multiple tool mounting options for application specifics. These highly ergonomic and user friendly arms are available in torque ranges of 150 Nm to 7,500 Nm and with reaches ranging up to 20 ft.


GCI arms can be designed as Smart Arms with two encoder options: PC-based AdaptiCS software (see page 156) and AcraDyne's Gen IV smart arm system with process visualization (see page 16). This complete Smart Arm system error-proofs even the most complex torque applications.

Tools recommended for use with this arm:

- AcraDyne 3000 – 9000 Series HT tools
- Angle (AEN 5000 series only)
- Straight (AES)
- Axial (AEJ)
- Pistol (AEP)
- Fixtured (AEF)

FEATURES AND BENEFITS

- Available in aluminum, steel, or carbon fiber
- Configurable installation: floor mount, wall mount, overhead mount, bench mount, or portable base
- Braking options: manual/automatic, discrete braking with verification, parking brakes, and electric/pneumatic actuation
- Tool holding options: fixed position, gimbal mount
- Integrated tool start/brake actuation capability: tool trigger start, remote tool start
- Smart Arm Capabilities:
 - Available with as many as six encoders to monitor all desirable tool positions relative to application
 - Two encoder options:
 - AcraDyne Gen IV Smart Arm System with Process Visualization (see page 16)
 - AdaptiCS PC-based software that runs on an integrated industrial PC or on a customer supplied PC (see page 156)

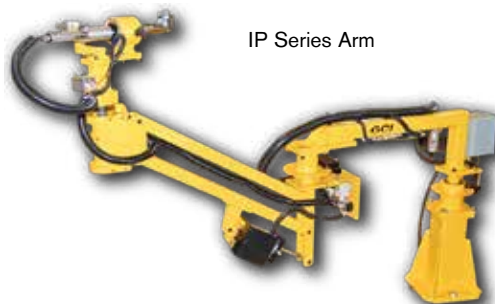

IP Series Arm



Carbon Fiber Arm

Rugged tablet PC option for Smart Arm

GCI TORQUE REACTION ARMS

GCI Torque Arm Specifications

MODEL	MAX. TORQUE	MAX. TOOL WEIGHT	MAX. REACH	MAX. VERTICAL TRAVEL	CONSTRUCTION
IPT Series - Torques to 375 Nm					
IPT150	150 Nm	12 lb	5 ft	30 in	Aluminum
IPT375	375 Nm	50 lb	6 ft	36 in	Steel
IP Series - Torques to 4,000 Nm					
IP4	550 Nm	30 lb	8 ft	48 in	Steel
IP5	1,000 Nm	50 lb	12 ft	60 in	Steel
IP7	3,000 Nm	100 lb	12 ft	60 in	Steel
IP8T	4,000 Nm	100 lb	12 ft	72 in	Steel
F Series - Carbon Fiber Arms					
F70	70 Nm	10 lb	3 ft	18 in	Carbon Fiber Composite
F600	600 Nm	50 lb	20 ft	72 in	Carbon Fiber Composite
F1500	1,500 Nm	50 lb	20 ft	72 in	Carbon Fiber Composite
F3000	3,000 Nm	75 lb	20 ft	72 in	Carbon Fiber Composite
F7500	7,500 Nm	75 lb	12 ft	72 in	Carbon Fiber Composite

GCI ARM OPTIONS



Remote starts



Tool sleeve

Parking brake and main rotation stops



Discrete brake tooling rotation



Additional Smart Arm Features



Discrete brake end rotation with encoder

Encoded tool sleeve



GCI TORQUE REACTION ARMS

Encoder Options for GCI Smart Arms

ACRADYNE GEN IV SMART ARM SYSTEM WITH PROCESS VISUALIZATION

AcraDyne's Gen IV controller with smart arm capability and process visualization provides an advanced error-proofing solution to ensure the quality of your fastening operation. The capability is integrated into the Gen IV controller – no need for an external PC or software. See page 16 for more details.

FEATURES AND BENEFITS

- Easy to follow visual guidance directly on the Gen IV controller graphical screen
- Easy to program and set up
- Low cost solution vs. competitive offerings
- Modular – can be added at any time to an existing AcraDyne system using the Gen IV controller



ADAPTICS SOFTWARE

Intuitive, user-friendly AdaptiCS PC-based software that runs on an integrated industrial PC or on a customer supplied PC. Smart arms guide the operator in programmable torque patterns and count fasteners required for correct assembly.

FEATURES AND BENEFITS

- Batch count capabilities
- Bidirectional arm articulation tracking
- Full torque/angle results display
- Integrates into any line control (PLC, MES, etc.)
- Multiple part locate strategies (1-point, 2-point, 3-point)
- Multiple rework strategies to fit requirements
- Fully programmable dynamic display with integrated PC option
- Integrates devices such as torque controllers via open protocol, encoded GCI torque reaction arms, scanners, vision cameras, and digital IO (pass/fail)
- AdaptiCS Enterprise (optional) provides full line control, interlocks, and data collection
- Runs on Windows 7, 8, and 10



3arm ZERO GRAVITY ARMS

3arm ZERO GRAVITY ARMS



STRONG AND DEPENDABLE, 3ARM ERGONOMIC ARMS PROVIDE FULL RANGE OF MOTION TO COMPLETE ANY TASK EFFICIENTLY AND SAFELY

Designed to keep tools and devices weightless even in difficult positions and working areas, 3arms are available with more than 29 head configurations. Add in various available accessories, and the arms can be fixed in almost any position. More than 1,000 standard combinations are available, as well as customized solutions.



Tools recommended for use with this arm:

- Tools that have sufficient mass for counter balancing and where overhead suspension is not an option

FEATURES AND BENEFITS

- Eases use of larger, higher weight tools, eliminating the hazards of operators having to physically carry the loads.
- Durable closed-case design absorbs considerable force
- Eliminates tool weight, providing not only an ergonomic benefit, but also increasing productivity
- Reduces operator fatigue and the chance of injury due to strain
- Holds any tool up to 77 lbs, keeping the tool weightless, while eliminating possible damage caused by dropping the tool
- Can be base-mounted, ceiling-mounted, or wall-mounted. Easily add precision reach by applying a rail, make it mobile with a trolley, or adding vertical reach with a mounting column
- Available with tool trigger braking. Effortlessly position the tool, stop it in place, release trigger, and float it to the next job




3arm ZERO GRAVITY ARMS

3arm Series 1



Light and nimble, capable of reaching even the most difficult applications.



Reach
Vertical: 44 in
Horizontal: 42 in

Max Weight
22 lb

MODEL	ORIENTATION	REACH		MAX WEIGHT
		VERT.	HORIZ.	LB
1SN1DS	Floor Mounted	42	44	22
1AM1DS	Ceiling Mounted	42	44	22

Compatible Head Members (161): B, BA, C, E, EA, F, G, K, N, T

BRAKE OPTIONS

LOO Not Required


To build your 3arm, choose the following

Arm Model	Head Member	Brake Option

3arm Series 2



Combination radial arm and tilting arm, each capable of 360° rotation. Two arms of different lengths give you the ability to reach separate working areas.

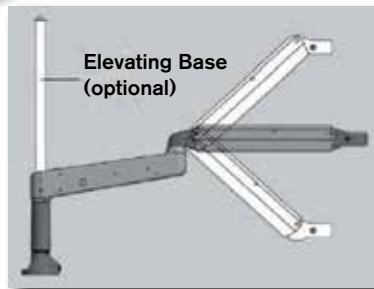

Reach
Vertical: 22 in
Horizontal: 34 in

Max Weight
13 lb

Max Torque
120 Nm
88 ft-lb

MODEL	ORIENTATION	REACH		MAX WEIGHT
		VERT.	HORIZ.	LB
BB	Floor Mounted	22.2	33.9	13
BE	Ceiling Mounted	22.2	33.9	13
BA	Ceiling Mounted	22.2	33.9	13

Compatible Head Members (161): B, BA, C, E, EA, F, G, K, N

BRAKE OPTIONS

LOO Not Required

To build your 3arm, choose the following

Arm Model	Head Member	Brake Option




3arm ZERO GRAVITY ARMS

3arm Series 3



Versatile arm with a long reach and the ability to carry a heavy load. Features “turning and tilting” brake locking systems (pneumatic or manual), allowing the operator to immobilize the arm in a fixed position on all axes simultaneously or separately.

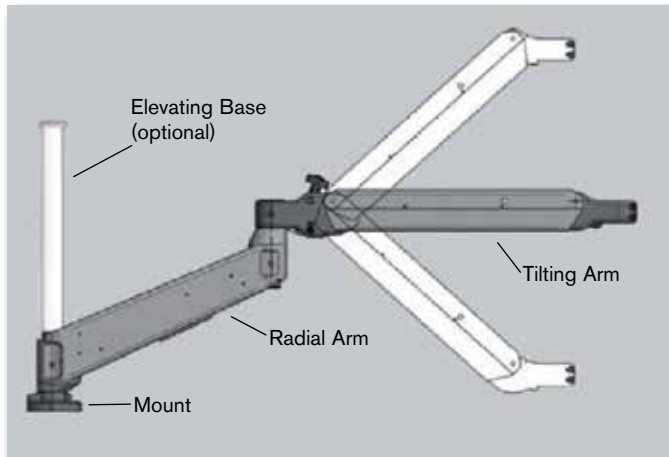

Reach	Max Weight	Max Torque
Vertical: 42 in	77 lb	650 Nm
Horizontal: 68 in		479 ft-lb

		REACH		MAX WEIGHT
MODEL	ORIENTATION	VERT.	HORIZ.	LB
Floor Mounted				
PSBS	Short Rad. + Short Tilt.	27.8	41.7	77
PSBM	Short Rad. + Long Tilt.	44.5	53.5	40
PLBS	Long Rad. + Short Tilt.	27.8	55.9	77
PLBM	Long Rad. + Long Tilt.	44.5	67.6	40
Ceiling Mounted				
PEBS	Short Rad. + Short Tilt.	27.8	41.7	77
PEBM	Short Rad. + Long Tilt.	44.5	53.5	40
ASBS	Long Rad. + Short Tilt.	27.8	55.9	77
ASBM	Long Rad. + Long Tilt.	44.5	67.6	40
Elevating Base				
ALBS	Elevating+ Short Tilt.	27.8	43.7	77
ALBM	Elevating+ Long Tilt.	44.5	55.8	40

Compatible Head Members (161): All

BRAKE OPTIONS	
L00	Not Required
L11	Manual
L22	Pneumatic
L50	Manual Locking Base
L92	Tool Trigger Activated

To build your 3arm, choose the following

Arm Model	Head Member	Brake Option

3arm ZERO GRAVITY ARMS

3arm Series 4



Reach
Vertical: 54 in
Horizontal: 58 in


Max Weight
53 lb

Max Torque
300 Nm
221 ft-lb

MODEL	ORIENTATION	REACH		MAX WEIGHT
		VERT.	HORIZ.	LB
DS	Floor Mounted, Short Arm	42.3	48	53
DM	Floor Mounted, Long Arm	55.5	57.5	43
ADS	Ceiling Mounted, Short Arm	42.3	48	53
ADM	Ceiling Mounted, Long Arm	55.5	57.5	43

Compatible Head Members (161): All

Dual-tilting arms expand range of movement. The innovative connections between the parts of the arm allow completely free movement of rolling up, down, and sideways. Capable of reaching the most difficult positions or work with weightless precision.



BRAKE OPTIONS

L00	Not Required
L11	Manual
L22	Pneumatic
L50	Manual Locking Base
L92	Tool Trigger Activated

To build your 3arm, choose the following

Arm Model	Head Member	Brake Option

3arm Series 6



Reach
Vertical: 26 in
Horizontal: 82 in


Max Weight
42 lb

MODEL	DESCRIPTION	REACH		MAX WEIGHT
		VERT.	HORIZ.	LB
BPRASC	Model 800	26	68	42
BPRASM	Model 1200	26	82	26

Compatible Head Members (161):

BPRASC - All
BPRASM - N,T

Extendable arm with ball linear guideways attached to a pendulum base arm, both capable of 360° rotation. This compact arm offers versatility for any type of tool. The telescopic top arm allows the user to work on hard-to-reach areas comfortably, quickly and safely. Works in a wide variety of applications.

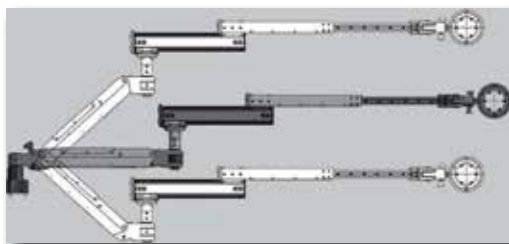

BRAKE OPTIONS

L00	Not Required
-----	--------------

To build your 3arm, choose the following

Arm Model	Head Member	Brake Option

3arm ZERO GRAVITY ARMS

3arm Head Members

Once you've determined the tools that will be used in you application, select a head member based on the type of application and necessary orientations.

B  Vertical Flat	BA  Vertical with Ring	C  Vertical Adjustable	E  Flat Articulated	EA  Flat Articulated with Ring	F  Articulated Adjustable	G  Quick Change
H  Heavy-Duty Applications	J  Magnetic Articulated Drill	K  Universal Strap	LA  Vertical Pneumatic Ball & Socket	M  Constant Pressure Support	N  Multiposition Articulated	P  Double Articulated Flat
Q  Heavy-Duty Multiposition Articulated	RA  Swing Revolver	RB  Revolver Pistol	RC  Vertical & Horizontal	R  Revolver	SN  Giraffe Multiposition	SQ  Heavy-Duty Giraffe Multiposition
SR  Giraffe Revolver	T  Multiposition Articulated Pistol	U  Heavy-Duty Multiposition Articulated Pistol	Z  Fork			


3arm Brake Options



L11
Manual Brakes
Manually turned handle



L22
Pneumatic Brakes



L50
Manual Locking Base
Handle at base only



L92
Tool Trigger Activated Brake
Pneumatic, activated through the tool

SUPPORT SYSTEM TOOL-MOUNTING OPTIONS

TOOL-MOUNTING OPTIONS



AIMCO provides many head and mounting options to fit almost any application. Find more information in our Application Manual for Arms and Fixtures located on our website.


Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.




Mobile




Overhead Trolley Mount

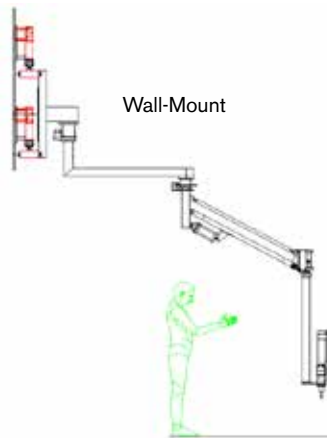

Wall-Mount

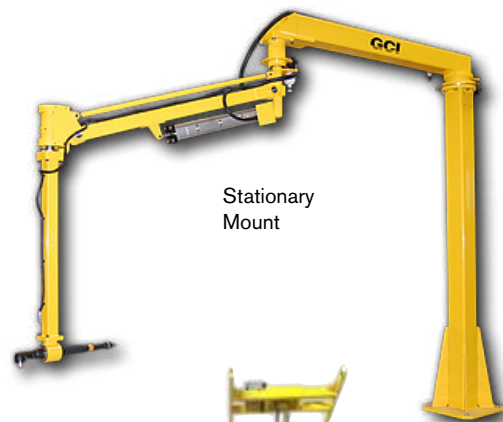

Stationary Mount

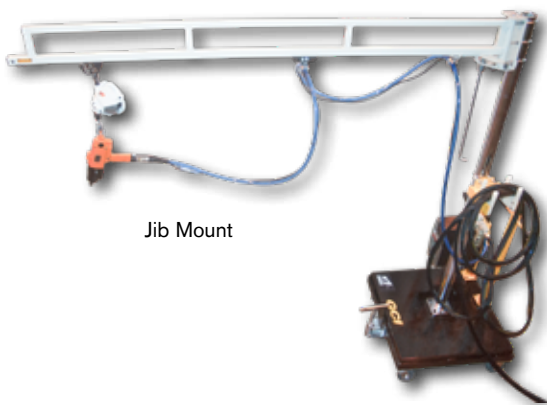

Jib Mount




Overhead Fixed Mount

WORKSTATION COMPONENTS AND ASSEMBLIES


COMPONENTS

TRACK


Steel with beige polyester finish. Use for vertical and horizontal workstation support.



PART NUMBER	30# TRACK
AT3-3	3 ft track
AT3-4	4 ft track
AT3-6	6 ft track
AT3-9*	9 ft track



PART NUMBER	50# TRACK
AT5-3	3 ft track
AT5-4	4 ft track
AT5-6	6 ft track
AT5-9*	9 ft track
AT5-12*	12 ft track



TRACK NUT (ATN-3/5)

Zinc plated steel. Use to attach accessories to track, as end stops, or to isolate rolling accessories.


- ATN-3 for 30 lb. track
- ATN-5 for 50 lb. track



END STOP (AES-3/5)


Zinc oxide finish. Use to prevent balancer trolley from "overtraveling" horizontal track.

- AES-3 for 30 lb. track
- AES-5 for 50 lb. track



MOUNTING PLATE (AMP-5)

Black polyester finish. Use as a base to mount vertical uprights.



END CAP (AEP-3/5)

Black molded vinyl. Use to cap track ends for a professional finish.


- AEP-3 for 30 lb. track
- AEP-5 for 50 lb. track



ANGLE BRACKET (AB-3/5)

Black polyester finish. Use to mount horizontal track to vertical track.


- AB-3 for 30 lb. track
- AB-5 for 50 lb. track



JOINT HANGER BRACKET (AJH-3/5)

Black polyester finish. Use to couple and hang end-to-end track.


- AJH-3 for 30 lb. track
- AJH-5 for 50 lb. track



BALANCER TROLLEY (ABT-3/5)

Black polyester finish. Use as moving support for tool balancers, hose, and cable. Quality ball bearing wheels for long life and smooth tracking.


- ABT-3 for 30 lb track (1.00 dia)
- ABT-5 for 50 lb track (1.25 dia)



HANGER BRACKET (AHB-3/5)

Black polyester finish. Use to suspend track at right angle.

- AHB-3 for 30 lb. track
- AHB-5 for 50 lb. track



VERTICAL COLUMN (AVC-5*)


Beige polyester finish, 3" diameter x 9 ft upright steel column with welded base. Use as floor mount for extra stability with jibs or workstation components.



HOSE/CABLE TROLLEY


Black polyester finish. Use for moving cable or hose festoon. Supports hose cable OD .60-.94.

- AIC3-2 for 30 lb. track
- AIC5-2 for 50 lb. track




U-BOLTS (AUB-5)

Zinc plated steel. Use to secure boom bracket, or any flat metal plate, to AVC-5 (sold individually).



END CLAMP (AEC5-2)


Black polyester finish. Use as end stop with hose carrier for festoon. Cable/hose OD .60-.94.



SUPPORT CLAMPS (ASC-3/5)

Black polyester finish. Use as additional support for track.

- ASC-3 for 30 lb. track
- ASC-5 for 50 lb. track




TOOL CLIP (SH-5)

Steel clip with safety latch. Use for tool attachment and as replacement clip for lightweight tool balancers. Measures 2.37" long.



ROLLING HANGER (ABT5-R)


Black polyester finish. Use as support for rolling track. Allows X/Y axis movement, includes ball bearing wheels.



90° CONNECTOR FOR 3/8" HOSE (WSCH)

3/8" I.D. Brass. Use to provide stable transfer point from air line to tool.

90 degree connector attaches to ABT-5.




WALL- AND FLOOR- MOUNTED JIBS

3 FT. SWINGING JIB (AW3S)

3 FT. FIXED JIB (AW3F)

3 FT. SWINGING JIB FOR CHANNEL MOUNT (AJS3**)

Jibs are mounted to wall or beams to create free standing workstations. End stop, end cap, and balancer trolley included. Maximum weight: 30 lb.

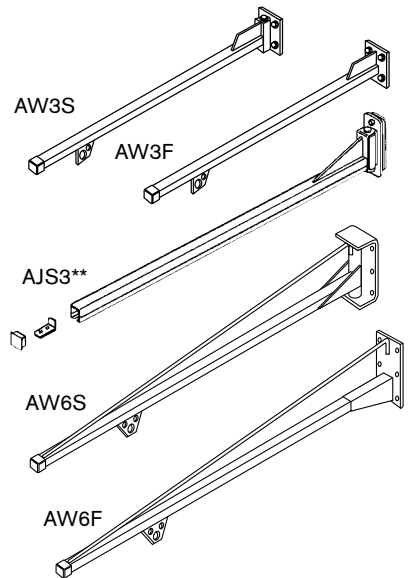

6 FT. SWINGING JIB (AW6S)

6 FT. FIXED JIB (AW6F)

Jibs can be wall mounted or attached to vertical column (AVC-5) to create a freestanding workstation. End stop, end caps, and balancer trolley are included. Maximum weight: 50 lb.

All complete assemblies are beige polyester finish and include balancer trolley, end caps, and end stops. Floor mounted assemblies are not able to ship via UPS.

When choosing a workstation system, remember...

Total weight capacities should include tool balancer, hose/cable, and tool/fixture. Units need to be supported vertically and horizontally every 6 ft.

** Additional freight may apply

** AJS3 Does not include balancer trolley

WORKSTATION COMPONENTS AND ASSEMBLIES

FLOOR MOUNTED 3 FT. SWINGING JIB* (AW3FMS)

FLOOR MOUNTED 3 FT. FIXED JIB* (AW3FMF)

Maximum weight: 30 lb
Column height: 6 ft

FLOOR MOUNTED 6 FT. SWINGING JIB* (AW6FMS*)


FLOOR MOUNTED 6 FT. FIXED JIB* (AW6FMF*)

Maximum weight: 50 lb
Column height: 9 ft

*Units include end stop,
balancer trolley and intermediate carrier.

BENCH MOUNTED SWINGING JIB (JJ30-S) BENCH MOUNTED FIXED JIB (JJ30)

Maximum weight: 30 lb
Column height: 48" including mounting plate
3 ft. swinging jib includes balancer
trolley, end stop, and cap

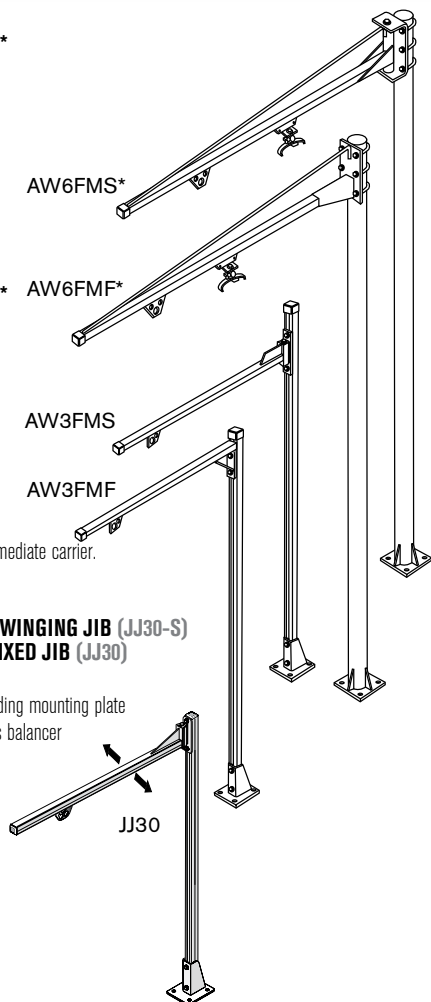


AIMCO WORKSTATION KIT

BENCH MOUNTED WORKSTATION WITH TORQUE ARM (JJ30-TA**)

- 5 lb. maximum weight (RPA-3 included)
- 5' column height including mounting plate
- 38" jib length (swinging)
- 15 lb torque rating
- 3/8" NPT inlet
- 1/4" NPT outlet
- Beige polyester finish
- 1/4" braided air hose
- 21" maximum vertical arm travel

**Additional freight may apply

**For use with pneumatic tools only

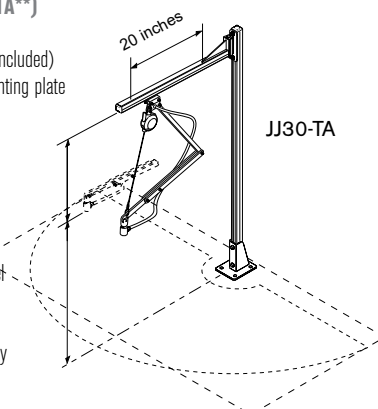

CREATE A CUSTOM SUPPORT SYSTEM USING AIMCO'S QUALITY PRODUCTS

- Organize work area to create a safe, productive working environment
- Reduce risk of injury to assembler by providing support for heavy tools
- Protect valuable tools, fixtures, and monitoring devices from damage by suspending them out of the way

AIMCO BASIC WORKSTATION KIT (ATW-50)




- 50 lb maximum weight capacity
- 48" uprights
- 36" extensions
- Table mounts included
- 6' tool rail with rolling trolley included
- All necessary hardware included

TROLLEY MOUNTED TORQUE ARM WITH 3-LB RETRACTOR AND HOSE (FA-50-2*)

Ergonomic arm absorbs torque reaction.
Moves front to back along overhead jib.

(TA-50-2)

Moves side to side on overhead track.



TOOL BASKET (21226)

Mounts easily to any work area to hold
pistol and angle style tools.

AIMCO can customize a workstation for you.

Contact an AIMCO Customer Service Associate 1-503-254-6600, or toll free 1-800-852-1368.

GRAVITY-DEFYING BALANCERS

TW-SERIES BALANCERS



TW-0 and TW-00

- Gravity defying / "true balance"
- No tension buildup to cause worker fatigue
- Easy external direct drive tensioning
- 360° upper swivel
- Safety cable provision
- Tool clip included



TW-3 through TW-70

- Tapered drum allows "true balance" throughout cable travel
- Easy external direct drive tensioning
- Cast aluminum casing for durability
- Permanent lubrication
- 360° top swivel
- Enclosed spiral spring for added safety
- Safety chain provision (TW-3 through TW-15 models)
- Automatic safety lock plus manual drum lock (TW-22 through TW-70)

MODEL	CAPACITY		ANTI-GRAVITY CAPACITY (LB)	CABLE
	LB	KG		
TW-00	1.1 - 3.3	0.5 - 1.5	2.5 - 3.0	18" stranded steel cable 1/8 dia.
TW-0	1.1 - 3.3	0.5 - 1.5	2.5 - 3.0	3.3-ft stranded steel cable 1/8" dia.
TW-3	2.2 - 6.6	1.0 - 3.0	4.5 - 6.0	4.3-ft stranded steel cable 5/32" dia.
TW-5	5.5 - 11.0	2.5 - 5.0	8.0 - 10.5	4.3-ft stranded steel cable 5/32" dia.
TW-9	9.9 - 19.8	4.5 - 9.0	15.0 - 19.0	4.3-ft stranded steel cable 5/32" dia.
TW-15	19.8 - 33.0	9.0 - 15.0	26.0 - 32.5	4.3-ft stranded steel cable 5/32" dia.
TW-22	33.0 - 48.4	15 - 22	41.0 - 48.0	5-ft stranded steel cable 3/16" dia.
TW-30	48.4 - 66.0	22 - 30	58.0 - 65.5	5-ft stranded steel cable 3/16" dia.
TW-40	66.0 - 88.0	30 - 40	77.5 - 87.5	5-ft stranded steel cable 3/16" dia.
TW-50	88.0 - 110.0	40 - 50	100.0 - 109.5	5-ft stranded steel cable 3/16" dia.
TW-60	110.0 - 132.0	50 - 60	122.0 - 131.0	5-ft stranded steel cable 3/16" dia.
TW-70	132.0 - 154.0	60 - 70	144.0 - 153.0	5-ft stranded steel cable 3/16" dia.

ASB-SERIES BALANCERS

- Built-in Safety Features: The cable, drum, and enclosed spring are fully visible without opening the unit for easy and convenient safety checks. The sturdy spiral spring is enclosed for greater control and safety
- Ergonomic Spring Release: The automatic safety lock provides extra control
- Extended Cable Length: Stainless steel cables allow for extended reach on applications
- Enhanced Gear Mechanism: Allows for more exact adjustment of tension
- No Recoil and Low Resistance: Tapered drum style provides gravity defying tool positioning and low travel



ASB-OC Gravity Defying and Hand Adjustable Balancer



ASB-3C
ASB-5C

MODEL	CAPACITY		STROKE		WEIGHT	
ASB-OC	1.1 - 3.3 lb	0.5 - 1.5 kg	51.1 in	130 cm	1.5 lb	0.7 kg
ASB-3C	3.3 - 6.6 lb	1.5 - 3 kg	86.4 in	220 cm	3.0 lb	1.4 kg
ASB-5C	5.5 - 11 lb	2.5 - 5 kg	86.4 in	220 cm	3.4 lb	1.5 kg

LINE REEL BALANCERS / RETRACTORS

LINE REEL BALANCERS

LR-Series

- Designed for light duty applications with small pneumatic tools
- Integrating air hose and support cable keep work areas clean
- Adjustable ball stop for optional positioning
- 1/4" I.D. polyvinyl hose with 1/4" NPT inlet
- 360 degree upper swivel
- Maximum 142 PSI



LR-09B-90/200

MODEL	HOSE LENGTH		CAPACITY	
LR-09B-90	35.5 in	90 cm	3 lb	1.5 kg
LR-09B-200	78.3 in	199 cm	3 lb	1.5 kg

RETRACTORS

RPA Series

- No tools needed to set tension
- 5 ft nylon coated steel cable
- Reinforced hanging bracket includes safety cable provision
- Adjustable cable stop
- Three (3) models support weight 0.5 – 5 lb
- Tool clip included

RMA-L Series

- Steel housing with polyester finish
- Reinforced hanging bracket includes safety cable provision
- 8 ft of 3/32" diameter coated steel cable
- Permanently lubricated
- Tool clip included
- External tension adjustment
- Ratchet cable lock



RMA-L Series



RPA Series

MODEL	CAPACITY	
RPA-1	0.5 - 1.5 lb	0.2 - 0.7 kg
RPA-2	1.5 - 3.0 lb	0.7 - 1.4 kg
RPA-3	3.0 - 5.0 lb	1.4 - 2.3 kg
RMA-7L	5 - 10 lb*	2.3 - 4.8 kg*
RMA-15L	10 - 15 lb*	4.5 - 6.8 kg*
RMA-20L	15 - 23 lb*	6.8 - 10.4 kg*

* With ratchet lock

AIR PREPARATION UNITS

AFRL STACKING FILTER/REGULATORS

Stacking filter/regulator combinations provide air filtration and precise regulation in a single unit for easy mounting and installation.

FEATURES AND BENEFITS

- All models include L-mount bracket, gauge, and metal bowl shields
- Polycarbonate filter and lubricator bowls (metal bowls standard on AFRL-8)
- 25-micron filter included on all models
- Regulating range: 7 – 125 PSI
- Custom order upgrade items include metal bowl, 5 micron filter, semi-automatic filter drain, and reduced PSI range regulator. Contact an AIMCO Customer Service Associate for more information, 1-503-254-6600, or toll free 1-800-852-1368




AFRL-2-C
AFRL-3-C



AFRL-3
AFRL-4
AFRL-8



28178
HT Air Tool/AFRL
Carrying Kit

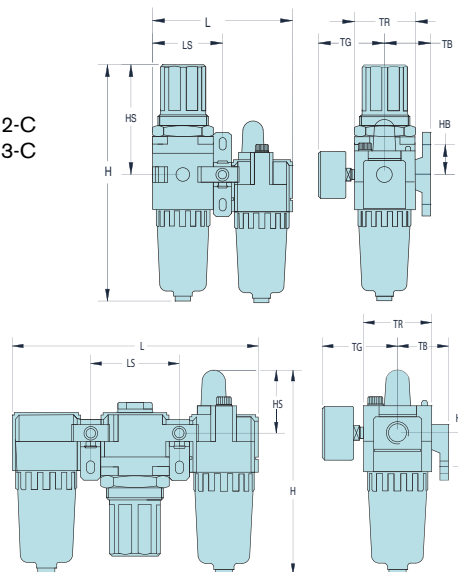


AFRL-4HTA
Standalone Unit



MODEL	PORT	GAUGE PORT	FLOW RATE CFM	L/MIN	BOWL SHIELD	H IN/MM	HB IN/MM	HS IN/MM	L IN/MM	LS IN/MM	TB IN/MM	TG IN/MM	TR IN/MM
AFRL-2	1/4"	1/8"	70	2,000	yes	6.16 (156.5)	1.39 (35.3)	1.50 (38.1)	7.13 (181.1)	2.52 (64.0)	1.61 (41.0)	2.39 (60.7)	2.09 (53.1)
AFRL-2-C	1/4"	1/8"	60	1,700	yes	8.31 (211.1)	1.38 (35.1)	3.64 (92.5)	4.61 (117.1)	2.30 (58.4)	1.61 (40.9)	2.39 (60.7)	2.09 (53.1)
AFRL-3	3/8"	1/4"	140	4,000	yes	7.54 (191.5)	1.57 (40.0)	1.61 (40.9)	9.37 (238.0)	3.31 (84.1)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-3-C	3/8"	1/4"	105	3,000	yes	10.31 (261.9)	1.57 (39.9)	4.41 (112.0)	6.06 (153.9)	3.03 (77.0)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-4	1/2"	1/4"	140	4,000	yes	7.54 (191.5)	1.57 (40.0)	1.61 (40.9)	9.37 (238.0)	3.31 (84.1)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-8	1"	1/4"	180	5,000	yes	10.69 (271.5)	1.97 (50.0)	1.89 (48.0)	11.81 (300.0)	4.13 (104.9)	2.75 (69.9)	2.97 (75.4)	3.54 (89.9)

Air Preparation Units: Basic Functions

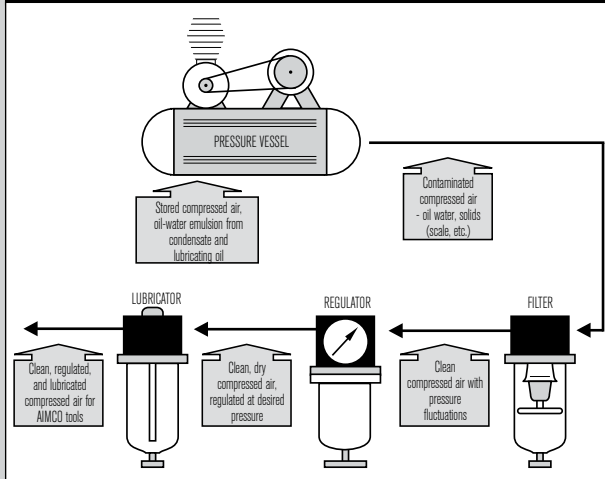

The supply of clean, dry air is essential to the operation of pneumatic powered tools. Use only clean filtered air for longer tool life. Provide proper airflow (CFM) and regulate air pressure (PSI) for optimum performance.

To determine unit size for application, you need to know:


- Total air flow (CFM) required for application
- Size of incoming air line and size of air line required by tool
- Air supply pressure (PSI)
- Allowable pressure drop
- Does the application require lubrication?
- Does the overall system have the required capacity?

AIR LINE

Polyurethane Hose



- Durable Polyurethane is chemical resistant and lightweight, and provides excellent recoil memory and maximum flexibility
- Available in transparent hose color (opaque also available)
- Assemblies for coiled hose include reusable swivel fitting. Straight hose available with or without fittings
- Working temperature: -104°F to 175°F



SINGLE AIR HOSE ASSEMBLIES (COILED)

MODEL	DESCRIPTION (O.D. x I.D. x LENGTH)	RETRACTED LENGTH	WORKING PRESSURE	NPT FITTINGS
ASH-250C-10MSZ	3/8" x 1/4" x 10'	7"	100 psi	1/4"
ASH-250C-15MSZ	3/8" x 1/4" x 15'	9-1/2"	100 psi	1/4"
ASH-250C-25MSZ	3/8" x 1/4" x 25'	15-1/2"	100 psi	1/4"
ASH-375C-15MSZ	9/16" x 3/8" x 15'	10"	100 psi	3/8"
ASH-375C-25MSZ	9/16" x 3/8" x 25'	14"	100 psi	3/8"
ASH-500C-15MSZ	3/4" x 1/2" x 15'	13"	100 psi	1/2"
ASH-500C-25MSZ	3/4" x 1/2" x 25'	23"	100 psi	1/2"

Custom length coil assemblies and special colors available in minimum order quantities. Contact an AIMCO Customer Service Associate, 1-503-254-6600, or toll free 1-800-852-1368.



Straight Air Hose (Sold Per Foot)

MODEL	DESCRIPTION
ASH-375Z	3/8" I.D.
ASH-500Z	1/2" I.D.

Contact an AIMCO Customer Service Associate about full reel pricing, 1-503-254-6600, or toll free 1-800-852-1368.

Rubber Hose



- Designed for use in a wide range of industrial, construction, and agricultural applications
- Constructed of high grade, reinforced EPDM synthetic rubber
- Working temperature: -40°F to 190°F

Single Air Hose (Rubber)

I.D.	O.D.	LENGTH	WORKING PRESSURE	WEIGHT
3/16"	0.44"	10 ft	200 psi	0.8 lb
1/4"	0.5"	10 ft	200 psi	0.9 lb
5/16"	0.58"	10 ft	200 psi	1.2 lb
3/8"	0.67"	10 ft	200 psi	1.5 lb
1/2"	0.81"	10 ft	200 psi	2.0 lb
5/8"	0.97"	10 ft	200 psi	2.7 lb
3/4"	1.12"	10 ft	200 psi	3.4 lb

Custom lengths available. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.

Helpful Hints For Air Hose Use

- Use recommended I.D. air hose and fittings
- Replace air hose regularly to help maintain clean air
- A clear hose allows you to see water or dirt accumulation in hose
- Use correct length of hose to reduce air loss and pressure drop
- Use locking quick-disconnect couplers for additional safety

AIR LINE ACCESSORIES

BRASS QUICK COUPLERS

Manual ball couplers designed for use with ergonomic twist plugs. Brass with nitrile seals, rated to 300 PSI, from -40° to +250° F.

MODEL	DESCRIPTION
B23	1/4" NPT F x 1/4" QC Brass Coupler
B23E	1/4" NPT F x 3/8" QC Brass Coupler
B25	3/8" NPT F x 3/8" QC Brass Coupler



IN-LINE MINI REGULATORS

Easily adjust airflow with the turn of a dial.

MODEL	CAPACITY
932-100-0	1/8" NPT
932-110-0A	1/4" NPT



MINI AIR GAUGE SWIVEL JOINT KITS

- Bi-directional 360° rotation
- Keeps air hose straight and untwisted
- Decreases operator fatigue



MODEL	INLET	WEIGHT	MAX PSI	TOOL CFM
7021AG	1/4" NPT	3 oz	Up to 125	25
7041AG	3/8" NPT	3 oz	Up to 125	50



7021AG

ERGONOMIC TWIST PLUGS

These unique, ergonomically designed hose fittings provide 360° rotation and 35° angled rotation in any direction.

- Two rotation points prevent kinking of air hose
- Design ensures full air pressure flow
- Rotating joint comes with polyurethane dust cover
- Heavy duty construction



TS-30NP-2NPT




TS-20NP-2NPT



TS-20US-2NPT




TS-30US-3NPT

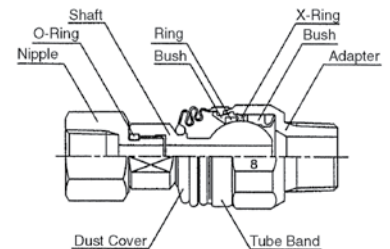

MODEL	DESCRIPTION
TS-30NP-2NPT	3/8" NPT Female x 1/4" NPT Male
TS-20NP-2NPT	1/4" NPT Female x 1/4" NPT Male
TS-20US-2NPT	1/4" US Plug x 1/4" NPT Male
TS-30US-3NPT	3/8" US Plug x 3/8" NPT Male

SWIVEL AIR FITTINGS

For use with most portable air tools, including grinders, drills, screwdrivers, buffers, sanders, staple guns, and more. Rotates 360° for awkward angles.



MODEL	INLET	WEIGHT	MAX PSI	TOOL CFM
7021	1/4" NPT	3 oz	Up to 125	25
7041A	3/8" NPT	11 oz	Up to 125	50
7051	1/2" NPT	7 oz	Up to 125	60

AIR LINE FITTINGS

MODEL	CAPACITY
250-RZ	1/4" NPT Rigid Fitting
250-SZ	1/4" NPT Swivel Fitting
375-RZ	3/8" NPT Rigid Fitting
375-SZ	3/8" NPT Swivel Fitting
500-SZ	1/2" NPT Swivel Fitting



BRASS ADAPTERS AND BUSHINGS

Pipe fittings for use as medium and low pressure connectors. Meets functional requirements of SAE J530, SAE J531, ASME and ASA. Rated 1,000 PSI from -65° to +250° F.



MODEL	DESCRIPTION
222P-6-4	3/8" NPT F x 1/4" NPT M Adapter
222P-8-6	1/2" NPT F x 3/8" NPT M Adapter
222P-12-8	3/4" NPT F x 1/2" NPT M Adapter
209P-6-4	1/4" NPT F x 3/8" NPT M Bushing
209P-8-6	3/8" NPT F x 1/2" NPT M Bushing

STANDARD FASTENER TOOLS

STANDARD FASTENER TOOLS

Connect your tool to the application with Bits, Sockets, and Nutsetters from AIMCO.

AIMCO has assembled a complete package of commonly used screwdriver bits and nutsetters. Our goal is to supply you with the highest quality bits and nutsetters for your fastener needs. Whether you're in electronics, aerospace, automotive, or general industry, AIMCO has the bits and nutsetters to fit your needs.

MAG-O-NETS®: A Revolutionary Way to Convert Standard Bits to Magnetic Bits


FEATURES AND BENEFITS

- Easy, cost effective alternative to traditional magnetic bit holder and insert bit combination
- Improves torque transfer by eliminating "wobble effect"
- Easily adjust magnetic attraction by moving Mag-O-Net collar closer to or further from fastener
- Fits virtually any standard screwdriver bit
- Reusable and interchangeable – once a bit is worn out, simply remove your Mag-O-Net and slide it onto the next bit
- Lifetime guarantee on magnetic attraction



*U.S. Patent 5861789

PART NO	INNER DIAMETER (ID)	OUTER DIAMETER (OD)	L MM
AM1/4Z	7 mm	19 mm	10
AM5Z	6 mm	17.5 mm	10
AM3/16Z	3/16 in	17.5 mm	10
AM5/16Z	5/16 in	20 mm	10



MARKER SOCKETS

Marker Sockets paint the bolt head at the same time the torque is checked. Sockets are designed to your specification.

- Unit consists of a marker socket, an ink cartridge, a spring, and the cartridge cap
- Cartridge can be inserted/taken off easily for ink management
- Easily replaceable paint point
- Can be used with either oil-based or water-based inks
- When ordering, provide dimensions shown.

To order, contact an AIMCO Customer Service Associate 1-503-254-6600, or toll free 1-800-852-1368



Socket





Bolt




Nut



Recessed bolt




Bolt clearance

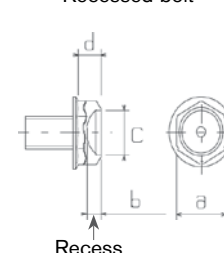

Recess

STANDARD FASTENER TOOLS

IMPACT SOCKETS

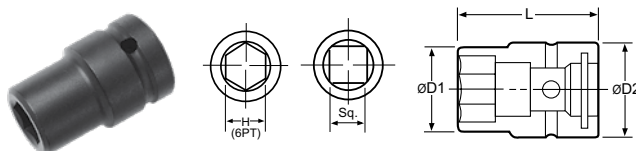

	PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
3/8" Square Drive								
SAE	A31/4	1/4"	10	0.39	19	0.75	34	1.34
	A35/16	5/16"	12	0.47	19	0.75	34	1.34
	A33/8	3/8"	15	0.59	19	0.75	34	1.34
METRIC	A306	6 mm	10	0.39	19	0.75	34	1.34
	A307	7 mm	13	0.49	20	0.79	32	1.26
	A308	8 mm	14	0.55	20	0.79	32	1.26
3/8" Square Drive, Deep								
	A307-2	7 mm	13	0.49	20	0.79	50	1.97
	A307-2.75	7 mm	13	0.49	20	0.79	70	2.76
	A308-2	8 mm	14	0.55	20	0.79	50	1.97
3/8" Square Drive, Magnetic								
SAE	A31/4MP	1/4"	10	0.39	19	0.75	34	1.34
	A35/16MP	5/16"	12	0.47	19	0.75	34	1.34
	A33/8MP	3/8"	15	0.59	19	0.75	34	1.34
METRIC	A308MP	8 mm	14	0.55	20	0.79	32	1.26
	A310MP	10 mm	17	0.65	20	0.79	32	1.26
	A311MP	11 mm	17	0.65	19	0.75	34	1.34
1/2" Square Drive								
SAE	A43/8	3/8"	16	0.63	25	0.98	38	1.50
	A47/16	7/16"	18	0.69	25	0.98	38	1.50
	A41/2	1/2"	19	0.75	25	0.98	50	1.97
METRIC	A408	8 mm	16	0.61	25	0.98	40	1.58
	A409	9 mm	16	0.63	25	0.98	40	1.58
	A410	10 mm	18	0.69	25	0.98	40	1.58
1/2" Square Drive, Deep								
SAE	A43/8-3.25	3/8"	17	0.67	25	0.98	82	3.23
	A47/16-3.25	7/16"	19	0.73	25	0.98	82	3.23
	A41/2-3.25	1/2"	22	0.85	25	0.98	82	3.23

	PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
METRIC	A410-2	10 mm	18	0.69	25	0.98	50	1.97
	A410-3	10 mm	18	0.69	25	0.98	75	2.95
	A410-3.25	10 mm	17	0.67	25	0.98	82	3.23
	A411-3.25	11 mm	19	0.73	25	0.98	82	3.23
1/2" Square Drive, Magnetic								
	A408MP	8 mm	16	0.61	25	0.98	40	1.58
	A410MP	10 mm	18	0.69	25	0.98	40	1.58
	A412MP	12 mm	21	0.81	25	0.98	40	1.58
3/4" Square Drive								
SAE	A611/16	11/16"	30	1.18	44	1.73	50	1.97
	A63/4	3/4"	32	1.26	44	1.73	50	1.97
	A613/16	13/16"	35	1.38	44	1.73	50	1.97
METRIC	A614	14 mm	24	0.95	38	1.50	55	2.17
	A616	16 mm	27	1.06	44	1.73	50	1.97
	A617	17 mm	30	1.18	38	1.50	55	2.17
3/4" Square Drive, Deep								
SAE	A611/16-4	11/16"	31	1.22	44	1.73	100	3.94
	A63/4-4	3/4"	33	1.30	44	1.73	100	3.94
	A613/16-4	13/16"	36	1.42	44	1.73	100	3.94
METRIC	A617-4	17 mm	31	1.22	44	1.73	100	3.94
	A618-4	18 mm	32	1.26	44	1.73	100	3.94
	A619-4	19 mm	33	1.30	38	1.50	100	3.94
1" Square Drive								
SAE	A87/8	7/8"	37	1.46	54	2.13	59	2.32
	A815/16	15/16"	38	1.50	54	2.13	59	2.32
	A81	1"	41	1.61	54	2.13	59	2.32
METRIC	A817	17 mm	31	1.22	50	1.97	63	2.48
	A819	19 mm	33	1.30	50	1.97	63	2.48
	A821	21 mm	37	1.46	50	1.97	63	2.48

Additional types and sizes of fastener tools, as well as custom parts, are available upon request. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

ANTI-MARRING SOCKETS

AIMCO's anti-marring sockets have a protective resin cover that spins freely, preventing damage to application surfaces, and protecting fingers.



CV Series



CVF Series




CVF Series
with Bit
Attachment



STANDARD FASTENER TOOLS


UNIVERSAL SOCKETS



PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
3/8" Square Drive							
A310U	10 mm	16	0.63	20	0.79	55	2.17
A311U	11 mm	16	0.63	20	0.79	60	2.36


1/2" Square Drive							
A412U	12 mm	20.5	0.81	25	0.98	70	2.76
A413U	13 mm	19	0.75	24	0.95	70	2.76

QUICK CHANGE CHUCKS



PART NO	SQ DRIVE	HEX	D1 MM	D1 IN	L MM	L IN
ADC-2S	1/4"	1/4"	19	0.75	38	1.50
ADC-3S	3/8"	1/4"	20	0.79	42	1.65
ADC-4S	1/2"	1/4"	19	0.75	46	1.81
ADC-3SH7/16Z	3/8"	7/16"	25	0.98	46	1.81
ADC-4SH7/16Z	1/2"	7/16"	33	1.30	55	2.17


ALLEN SOCKETS



PART NO	HEX	L1 MM	L1 IN	L MM	L IN
3/8" Square Drive					
A31/4C	1/4"	10	0.39	42	1.65
A304C	4 mm	10	0.39	42	1.65


1/2" Square Drive					
A41/4C	1/4"	25	0.98	50	1.97
A405C	5 mm	25	0.98	50	1.97

EXTENSIONS




PART NO	SQ DRIVE	HEX	L MM	L IN	D MM	D IN
A375E	3/8"	3/8"	75	2.95	20	0.79
A405E	1/2"	1/2"	51	2.01	30	1.18
A610E	3/4"	3/4"	100	3.94	44	1.73
A810E	1"	1"	102	4.02	54	2.13
A1220E	1-1/4"	1-1/4"	200	7.87	60	2.36
A1418E	1-1/2"	1-1/2"	178	7.01	84	3.31
A2426E	2-1/2"	2-1/2"	264	10.39	137	5.39

NUTSETTERS



PART NO	HEX	L MM	L IN
A3B1/4-2	1/4"	50	1.97
A3B1/4-2.5	1/4"	63	2.50
A3B5/16-2	5/16"	50	1.97
A3B5/16-2.5	5/16"	63	2.50
A3B3/8-2	3/8"	50	1.97
A3B3/8-2.5	3/8"	63	2.50
A3B05-2.75	5 mm	70	2.76
A3B55-1.2	5.5 mm	30	1.18
A3B55-2.75	5.5 mm	70	2.76
A3B55-4	5.5 mm	100	3.94
A3B06-2.75	6 mm	70	2.76
A3B07-1.2	7 mm	30	1.18
A3B07-2	7 mm	50	1.97
A3B07-2.75	7 mm	70	2.76
A3B07-4	7 mm	100	3.94
A3B08-1.2	8 mm	30	1.18
A3B08-2	8 mm	50	1.97
A3B08-2.75	8 mm	70	2.76
A3B08-4	8 mm	100	3.94
A3B08-6	8 mm	150	5.91
A3B08-8	8 mm	200	7.87
A3B09-2.75	9 mm	70	2.76
A3B09-4	9 mm	100	3.94
A3B10-1.2	10 mm	30	1.18
A3B10-2	10 mm	50	1.97
A3B10-2.75	10 mm	70	2.76
A3B11-2.75	11 mm	70	2.76
A3B12-1.2	12 mm	30	1.18
A3B13-2.75	13 mm	70	2.76
A3B14-2.75	14 mm	70	2.76
A3B16-2.75	16 mm	70	2.76
A3B17-2.75	17 mm	70	2.76

SOCKET ADAPTERS




PART NO	FEMALE SQ. DRIVE	MALE SQ. DRIVE	D MM	D IN	L MM	L IN
A302A	3/8"	1/4"	22	0.87	35	1.38
A403A	1/2"	3/8"	25	0.98	37	1.46
A504A	5/8"	1/2"	35	1.38	47	1.46
A604A	3/4"	1/2"	38	1.50	53	2.09
A806A	1"	3/4"	50	1.97	70	2.76
A128A	1-1/4"	1"	60	2.36	76	2.99
A#508A	Spline #5	1"	60	2.36	90	3.54

Additional types and sizes of fastener tools, as well as custom parts, are available upon request. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.


STANDARD FASTENER TOOLS

PHILLIPS POWER BITS




PART NO	POINT SIZE	L MM	L IN
A3S0-2	0	50	1.97
A3S1-2	1	50	1.97
A3S1-2.75	1	70	2.76
A3S1-3	1	75	2.95
A3S1-3.5	1	90	3.54
A3S1-4	1	100	3.94
A3S1-6	1	150	5.91
A3S2-1.2	2	30	1.18
A3S2-1.6	2	40	1.57
A3S3-2	3	50	1.97
A3S3-2.75	3	70	2.76

Double-Ended



A3W1-3	1	75	2.94
A3W1-4	1	100	3.94
A3W2-2	2	50	1.97
A3W2-3	2	75	2.94
A3W2-4	2	100	3.94
A3W2-6	2	150	5.91
A3W2-8	2	200	7.87
A3W2-10	2	250	9.84
A3W2-12	2	300	11.81
A3W3-2	3	50	1.97
A3W3-3	3	75	2.94
A3W3-4	3	100	3.94
A3W3-6	3	150	5.91
A3W3-8	3	200	7.87

TORX POWER BITS



PART NO	TORX SIZE	L MM	L IN
A3T6-2	T6	50	1.97
A3T7-2	T7	50	1.97
A3T7-2.75	T7	70	2.76
A3T7-3.5	T7	90	3.54
A3T7-6	T7	150	5.91
A3T8-2	T8	50	1.97
A3T9-2.75	T9	70	2.76

BIT HOLDERS



PART NO	L MM	L IN
1/4" Hex, Magnetic		
A3BHM-3	75	2.94
A3BHM-4	100	3.94
A3BHM-6	150	5.91
A3BHM-8	200	7.87
A3BHM-10	250	9.84

BIT AND NUTSETTER PART NUMBER NOMENCLATURE

Precedes Part Number

BITS

A3S = Phillips® Power Drive
A3W = Double Ended Phillips®
A38S = Phillips® Insert
A39S = Phillips® Insert
A3M = Slotted Power Drive
A38M = Slotted Insert
A3MT = Slotted Power Drive
A3C = Allen Socket Head Power Drive
A38C = Allen Socket Head Insert
A3R = Square Recess Power Drive
A3RT = Square Recess Turned Down (Power)
A38R = Square Recess Insert
A3T = Torx® Power Drive
A38T = Torx® Insert
A3TS = Torq-Set® Power Drive
A38TS = Torq-Set® Insert
A3TA = Triangle Power Drive
A3TW = Tri-Wing® Power Drive
A38TW = Tri-Wing® Insert
A7 = 7/16 Power Drive
AS = Electric Type Phillips®

AM = Electric Type Slotted
ATW = Electric Type Tri-Wing®
AT = Electric Hios Type Torx®
A26S = Electric Driver Phillips®
A26M = Electric Driver Slotted
A26C = Electric Driver Allen Socket Head
A3BHM = Insert Bit Holder (Magnetic Type)
A3BHD = Insert Bit Holder (Non Magnetic)
NUTSETTERS
A3B = Nutsetter
A3BMP = Magnetic (MP) Pressed Type
A3BMS = Magnetic (MS) Spring Loaded
A3BMT = Magnetic (MT) Tube Type
A3BU = Universal Nutsetter

MAG-O-NETS

AM = AIMCO Mag-O-Net®

Contained within Part Number

BITS

PZ = Pozidriv®
PZACR = Pozidriv® ACR®
SDV = Supadriv®
TR = Torx® Tamper Resistant
ACRI = ACR® Installation
ACR = ACR® Remove
ACRB = ACR® 4x4 Both Install and Remove
E4 = Electric 4 mm diameter
E5 = Electric 5 mm diameter
RS = Reduced Shank

Additional types and sizes of fastener tools, as well as custom parts, are available upon request. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.


ERGO-DRIVE SERIES

ERGO-DRIVE® SOCKETS PROTECT...

...YOUR INVESTMENT!




Pulse tools are an investment and the anvil is the most expensive single part of any pulse tool. ERGO-DRIVE sockets decrease vibration and wear on this critical component.




...YOUR ASSEMBLERS!

ERGO-DRIVE sockets cause significantly less vibration during fastening than conventional sockets. This allows your assemblers to do their jobs without the worry of vibration related injuries.

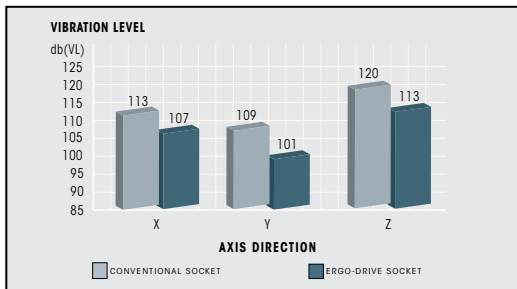


...YOUR PRODUCTS!

By reducing run-out and vibration, ERGO-DRIVE sockets allow the most repeatable, accurate rundowns to take place, ensuring excellent product quality.

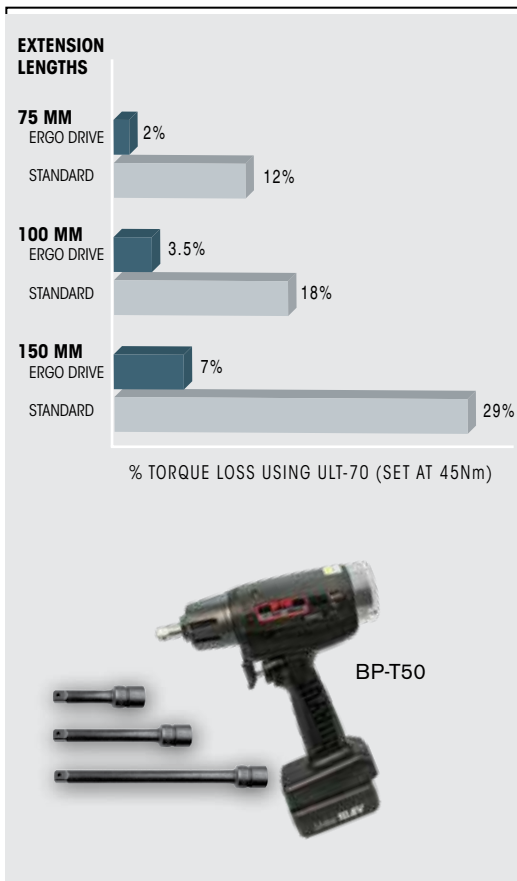



ERGO-DRIVE VS. STANDARD

ERGO-DRIVE

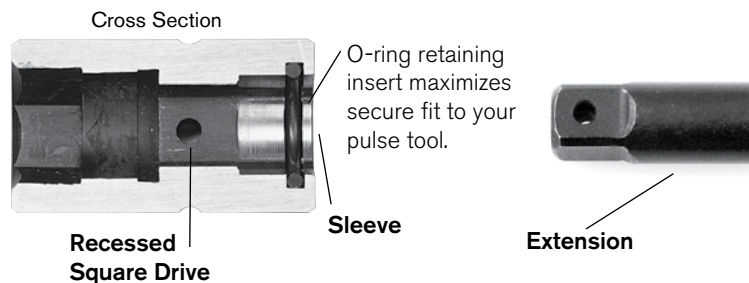


Standard

Cross Section




Standard Extension



Ergo-Drive

ERGO-DRIVE FASTENER TOOLS

ERGO-DRIVE SOCKETS

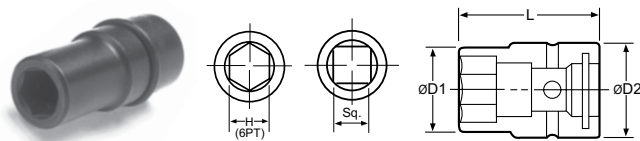

PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
---------	-----	----------	----------	----------	----------	---------	---------


3/8" Square Drive							
A312EDS	1/4"	10	0.39	19	0.75	44	1.73
A306EDS	1/2"	20	0.77	22	0.87	44	1.73
A308EDS	6 mm	10	0.39	19	0.75	44	1.73
A310EDS	8 mm	14	0.55	20	0.79	42	1.65
A310EDS	10 mm	17	0.65	20	0.79	42	1.65
A312EDS	12 mm	20	0.79	20	0.79	42	1.65
A314EDS	14 mm	22	0.87	20	0.79	42	1.65
A316EDS	16 mm	25	0.98	20	0.79	45	1.77
A318EDS	18 mm	27	1.06	20	0.79	45	1.77

1/2" Square Drive							
A412EDS	1/2"	19	0.75	25	0.98	50	1.97
A413EDS	13 mm	22	0.85	25	0.98	52	2.05
A414EDS	14 mm	23	0.89	25	0.98	52	2.05
A415EDS	15 mm	24	0.93	25	0.98	52	2.05
A416EDS	16 mm	25	0.98	25	0.98	52	2.05
A417EDS	17 mm	28	1.10	28	1.10	54	2.13
A418EDS	18 mm	29	1.14	28	1.10	54	2.13
A419EDS	19 mm	30	1.18	28	1.10	54	2.13

3/4" Square Drive							
A61-1/8EDS	1-1/8"	44	1.73	44	1.73	64	2.52
A61-1/4EDS	1-1/4"	49	1.91	44	1.73	66	2.60
A61-1/2EDS	1-1/2"	57	2.24	44	1.73	68	2.68
A618EDS	18 mm	31	1.22	44	1.73	60	2.36
A624EDS	24 mm	40	1.52	40	1.73	65	2.36

1" Square Drive							
A815/16EDS	15/16"	38	1.50	54	2.13	69	2.72
A8100EDS	100 mm	136	5.35	76	2.99	120	4.72

ERGO-DRIVE EXTENSIONS



PART NO	SQ DRIVE	H	L MM	L IN	D MM	D IN
---------	-------------	---	---------	---------	---------	---------


3/8" Square Drive						
A352EDE	3/8"	3/8"	52	2.05	20	0.79
A3100EDE	3/8"	3/8"	100	3.94	20	0.79
A375EDE	3/8"	3/8"	75	2.95	20	0.79
A3150EDE	3/8"	3/8"	150	5.91	20	0.79
A3190EDE	3/8"	3/8"	190	7.48	20	0.79
A3254EDE	3/8"	3/8"	254	10.00	20	0.79
A3300EDE	3/8"	3/8"	300	11.81	20	0.79
A3320EDE	3/8"	3/8"	320	12.60	20	0.79

1/2" Square Drive						
A464EDE	1/2"	1/2"	64	2.52	28	1.10
A476EDE	1/2"	1/2"	76	2.99	28	1.10
A4125EDE	1/2"	1/2"	125	4.92	28	1.10
A4204EDE	1/2"	1/2"	204	8.03	28	1.10
A4254EDE	1/2"	1/2"	254	10.00	28	1.10
A4355EDE	1/2"	1/2"	355	13.98	28	1.10

3/4" Square Drive						
A676EDE	3/4"	3/4"	76	2.99	40	1.58
A6100EDE	3/4"	3/4"	100	3.94	40	1.58
A6150EDE	3/4"	3/4"	150	5.91	40	1.58
A6200EDE	3/4"	3/4"	200	7.87	40	1.58

1" Square Drive						
A8150EDE	1"	1"	150	5.91	54	2.13
A8200EDE	1"	1"	200	7.87	54	2.13

ERGO-DRIVE QUICK CHANGE CHUCKS



PART NO	SQUARE DRIVE	HEX
---------	--------------	-----

3/8" Square Drive		
ADC-3SEDSQ	3/8"	1/4"
ADC-3SEDSQH7/16	3/8"	7/16"

1/2" Square Drive		
ADC-4SEDSQ	1/2"	1/4"
ADC-4SEDSQH7/16	1/2"	7/16"

Additional types and sizes of fastener tools, as well as custom parts, are available upon request. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

CUSTOM BITS, SOCKETS, AND EXTENSIONS

CUSTOM BITS, SOCKETS, AND EXTENSIONS FOR THE POWER TOOL USER


AIMCO can provide specials for virtually any application. From design to delivery, AIMCO's quick response ensures high quality, tight tolerance specials.

Specials are available in every style including:

- Deep Socket
- Extended Socket
- Universal
- Allen Head
- Torx Head
- Socket Adapter
- Nut Runner Socket
- Nut Runner Joint
- Nutsetter
- Magnetic Nutsetter
- Universal Nutsetter
- Screwdriver Bits



Sample request forms are shown. Your detailed requirements will allow AIMCO to quickly respond with custom solutions for your fastening requirements.



SOCKET

MAGNET			H	L	L1	L2	A	ØC	ØD1	ØD2	Sq.
MP	MT	MS	SIZE								
			TYPE								

SPECIAL PARTS

SOCKET TYPES



DOUBLE HEX
D (12 PT)
(DH)



SURFACE DRIVE
(SF)



DOUBLE SQUARE
(DSQ)



FLANK DRIVE
(FD)



SINGLE HEX
H (6 PT)
(SH)




FAST LEAD
(FL)



SINGLE SQUARE
(SQ)



HEX LOBULE
(TORX)

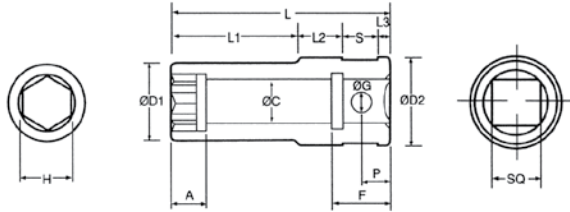


NUTRUNNER SOCKET TYPE A

Min. Qty. 10

Magnet MP MT MS	H	L	L ₁	L ₂	L ₃	S	ØD ₁	A	ØC	ØG	P	F	ØD ₂	Sq.	Qty.
SIZE															
TYPE															


✓ Box for Ergo-Drive

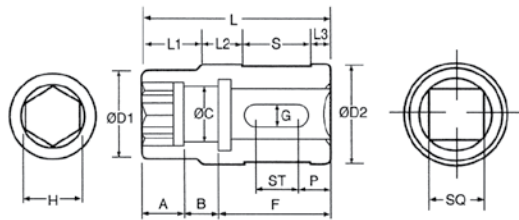

NUTRUNNER SOCKET TYPE B

Min. Qty. 10

H	L	L ₁	L ₂	L ₃	S	ØD ₁	A	B	ØC	G	P	F	ST	ØD ₂	Sq.	Qty.
SIZE																
TYPE																

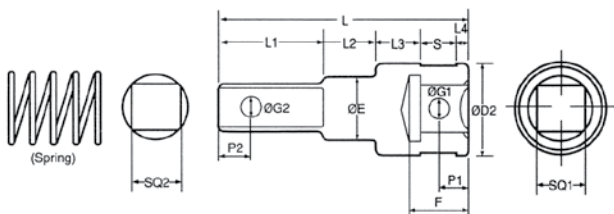


NUTRUNNER JOINT TYPE B

Min. Qty. 10

SQ ₂	L	L ₁	L ₂	L ₃	L ₄	S	P ₁	ØG ₂	ØE	F	ØG ₁	P ₂	ØD ₂	SQ ₁	Qty.

✓ Box for Ergo-Drive

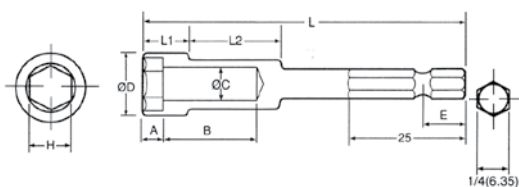

NUT SETTER


Min. Qty. 10

H	ØD	L	E	L ₁	L ₂	A	B	ØC	Qty.
SIZE									
TYPE									


SPECIAL PARTS

MAGNETIC STYLES:



MP (Press-inserted) Type



MS (Sliding) Type



MT (Tube) Type




SOCKET

Min. Qty. 10

Magnet			H	L	L ₁	L ₂	A	ØC	ØD ₁	ØD ₂	Sq.	Qty.
MP	MT	MS	SIZE									
			TYPE									

✓ Box for Ergo-Drive

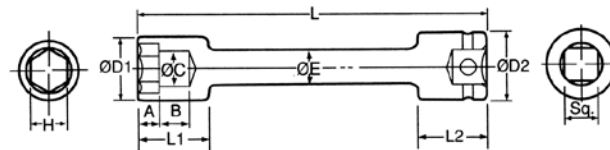


EXTENSION SOCKET

Min. Qty. 10

Magnet			H	L	L ₁	L ₂	A	B	ØC	ØD ₁	ØD ₂	ØE	Sq.	Qty.
MP	MT	MS	SIZE											
			TYPE											

✓ Box for Ergo-Drive

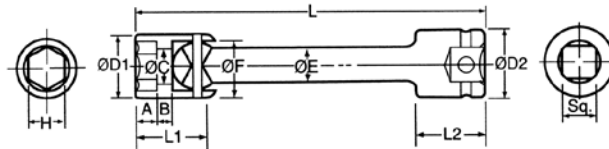

UNIVERSAL SOCKET


Min. Qty. 10

Magnet			H	L	L ₁	L ₂	A	B	ØC	ØD ₁	ØD ₂	ØE	ØF	Sq.	Qty.
MP	MT	MS	SIZE												
			TYPE												

✓ Box for Ergo-Drive

ALLEN HEAD/TORX HEAD

Min. Qty. 10

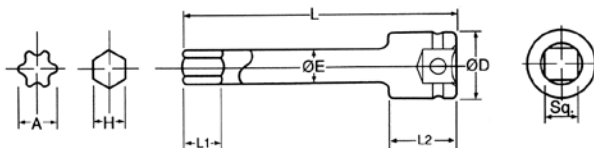


Torx	H	L	L ₁	L ₂	ØD	ØE	Sq.	Qty.

✓ Box for Ergo-Drive

SOCKET ADAPTER

Min. Qty. 10

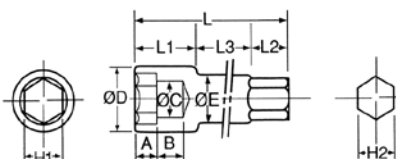


H ₁	L	L ₁	L ₂	L ₃	ØD	A	B	ØC	ØE	H ₂	Qty.
SIZE											
TYPE											

SPECIAL PARTS

(MP) MAGNETIC NUT SETTER


Min. Qty. 10

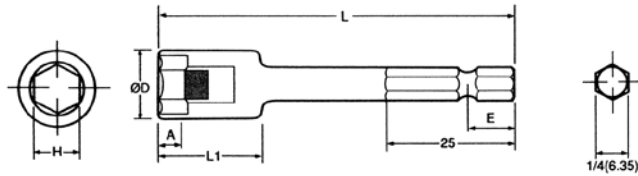

	H	L	E	L ₁	øD	A	Qty.
SIZE							
TYPE							

(MS) MAGNETIC NUT SETTER


Min. Qty. 10

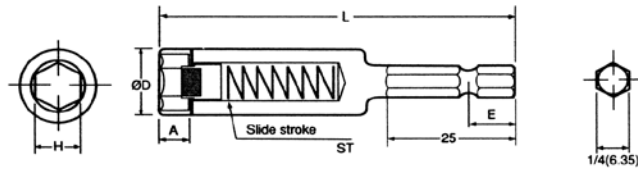

	H	L	E	øD	A	ST	Qty.
SIZE							
TYPE							

(MT) MAGNETIC NUT SETTER


Min. Qty. 10

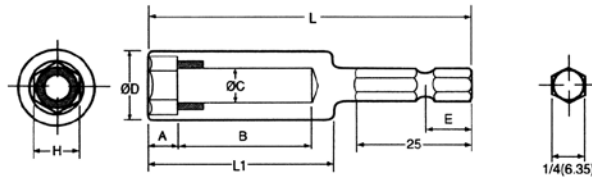

	H	L	E	L ₁	øD	A	B	øC	Qty.
SIZE									
TYPE									

UNIVERSAL NUT SETTER


Min. Qty. 10

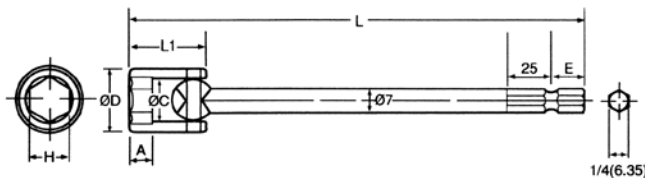

	H	L	E	L ₁	A	øC	øD	Qty.

SCREWDRIVER BIT

Min. Qty. 500



Point Size	L	L ₁	L ₂	øD ₁	øD ₂	E	H	Qty.

CIRCLE ONE:



Phillips®



Slotted



Torx®



Torx®
Tamper Resistant



Pozidriv®



Supadriv®



Square Recess



Allen Head



Torq-Set®



Tri-Wing®

INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
A		A3W3-3	173	AAP18885100A	108	ACPTT-V80-1410 600	153	AEP4A 7000 Series HT Tools	31
A128A	172	A3W3-4	173	AAP2876250A(R)	109	ACSA-600-1500	153	AEP4A 8000 Series HT Tools	31
A1220E	172	A3W3-6	173	AAP2876450A(R)	109	ACSA-800-1500	153	AEP4A(R)(T)22020B(V)	31
A1418E	172	A3W3-8	173	AAP2876650A(R)	109	ACSA-1000-1500	153	AEP4B 6000 Series HT Tools	32
A2100	144	A41/2	171	AAP2876950A(R)	109	ACCT-V15-600 150	152	AEP4B 7000 Series HT Tools	32
A2426E	172	A41/2-3.25	171	AAP28771400A(R)	109	ACCT-V15-800 300	152	AEP4B 8000 Series HT Tools	32
A31/2EDS	175	A41/2EDS	175	AAP28772000A(R)	109	ACCT-V40-600 150	152	AEP4B 9000 Series HT Tools	32
A31/4	171	A43/8	171	AAP28773000A(R)	109	ACCT-V40-850 300	152	AEP4R 1000 Series Pistol Tools	17
A31/4C	172	A43/8-3.25	171	AAP28785100A(R)	109	ACCT-V40-1500 600	152	AEP4R 1000 Series Rivet Tools	30
A31/4EDS	175	A47/16	171	AB-PBAIL	54	ACCT-V80-900 300	152	AEP4R 2000 Series Pistol Tools	21
A31/4MP	171	A47/16-3.25	171	AB-PCOLRING	54	ACCT-V80-1500 600	152	AEP4R 2000 Series Rivet Tools	30
A33/8	171	A403A	172	AB-3	163	ACCT-V80-2100 900	152	AEP4T 1000 Series Pistol Push-To-Start Tools	17
A33/8MP	171	A405C	172	AB-3/5	163	ADC-25	172	AEP4T 1000 Series Pistol Tools	17
A35/16	171	A405E	172	AB-B1825LI	54	ADC-35	172	AEP4T 1000 Series Rivet Tools	30
A35/16MP	171	A408	171	AB-B1850LI	54	ADC-35EDSQ	175	AEP4T 2000 Series Pistol Tools	21
A302A	172	A408MP	171	AB-C18-4W	54	ADC-35EDSQH7/16	175	AEP4T 2000 Series Rivet Tools	30
A304C	172	A409	171	AB-C18110	54	ADC-35H7/16Z	172	AEP4W 9X Series HTXD Tools	39
A306	171	A410	171	AB-C18220	54	ADC-45	172	AEP4W 9Y Series HTXD Tools	39
A306EDS	175	A410-2	171	ABETP Cordless XT Series	56	ADC-45EDSQ	175	AEP4W 8000 Series HT Tools	32
A307	171	A410-3	171	ABMU 1200-600	148	ADC-45EDSQH7/16	175	AEP4W 9000 Series HTXD Tools	39
A307-2	171	A410-3.25	171	ABMU 1200-1000	148	ADC-45H7/16Z	172	AEP-5	163
A307-2.75	171	A410MP	171	ABMU 2000-1000	148	AD-D1098-P	146	AE-PG7080	136
A308	171	A411-3.25	171	ABN-CTA Cordless Angle Tools	52	AD-D1098-PAC	146	AE-3	163
A308-2	171	A412MP	171	ABN-MTA Cordless Angle Tools	51	AD-D1098-S	146	AE33 3000 Series Inline Tools	25
A308EDS	175	A412U	172	ABP-CTA Cordless Pistol Tools	52	AD-D1098-SAC	146	AE33 5000 Series Inline Tools	27
A308MP	175	A413EDS	175	ABP-CTA Ultra Torque Cordless Pistol Tools	53	ADM Series 3arm	160	AE34A 1000 Series Inline Tools	18
A310EDS	175	A413U	172	ABP-CTA Cordless Pistol Tools	51	ADS Series 3arm	160	AE34A 2000 Series Inline Mid-Exit Cable Tools	23
A310MP	171	A414EDS	175	ABP-CTA Cordless Straight Tools	52	ADW-0010K	95	AE34A 2000 Series Inline Tools	22
A310U	172	A415EDS	175	ABP-CTA Cordless Straight Tools	52	ADW-0075K	95	AE34A 6000 Series HT Dual-Lever Tools	37
A311MP	171	A416EDS	175	ABP-CTA Cordless Straight Tools	51	ADW-0180K	95	AE34A 6000 Series HT Dual-Lever Tools	37
A311U	172	A417EDS	175	ABT-3	163	ADW-0270K	95	AE34A 7000 Series HT Dual-Lever Tools	37
A312EDS	175	A418EDS	175	ABT-5	163	ADW-0500K	95	AE34A 7000 Series HT Dual-Lever Tools	37
A314EDS	175	A419EDS	175	ABTS-R	163	ADW-1400F	95	AE34A 8000 Series HT Dual-Lever Tools	37
A315V	144	A464EDE	175	ABT-CTA Cordless Tubenut Tools	52	AE-224PS	136	AE34A 8000 Series HT Dual-Lever Tools	37
A316EDS	175	A476EDE	175	ACA10-1000	149	AE-278PS	136	AE34A 9000 Series HT Dual-Lever Tools	37
A318EDS	175	A4125EDE	175	ACA10-1500	149	AE-2015	135	AE34B 6000 Series HT Dual-Lever Tools	37
A352EDE	175	A4204EDE	175	ACA15-1000	149	AE-2020	134	AE34B 7000 Series HT Dual-Lever Tools	37
A375E	172	A4254EDE	175	ACA15-1500	149	AE-2045A	136	AE34B 7000 Series HT Dual-Lever Tools	37
A375EDE	175	A4355EDE	175	ACA15-2000	149	AE-4020	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3100EDE	175	A-50A-0	143	ACA40-1000	149	AE-4520	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3150EDE	175	A-50A-1.7	143	ACA40-1500	149	AE-4520ESD	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3190EDE	175	A-50ARB-0	143	ACA40-2000	149	AE-5681	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3254EDE	175	A-50ARB-1.7	143	ACA40-2500	149	AE-5681ESD	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3300EDE	175	A-50ARBT-0	143	ACA80-1500	149	AE-6300	135	AE34B 7000 Series HT Dual-Lever Tools	37
A3320EDE	175	A-50ARBT-1.7	143	ACA80-2000	149	AE-6300M	135	AE34B 7000 Series HT Dual-Lever Tools	37
A381/4-2	172	A-50B-1	143	ACA80-2500	149	AE-6300S	135	AE34B 7000 Series HT Dual-Lever Tools	37
A381/4-2.5	172	A-50B-2	143	ACA150-1500	149	AE-6450	135	AE34B 7000 Series HT Dual-Lever Tools	37
A383/8-2	172	A-50B-3	143	ACA150-2000	149	AE-6450S	135	AE34B 7000 Series HT Dual-Lever Tools	37
A383/8-2.5	172	A-50B-4	143	ACA150-2500	149	AE-7010	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3805-2.75	172	A-50BRBT-1	143	ACA220-1500	149	AE-7010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A385/16-2	172	A-50BRBT-2	143	ACA220-2000	149	AE-7080A	136	AE34B 7000 Series HT Dual-Lever Tools	37
A385/16-2.5	172	A-50BRBT-3	143	ACA220-2500	149	AE-8010	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3806-2.75	172	A-50BRBT-4	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3807-1.2	172	A-50BRBT-5	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3807-2	172	A-50BRBT-6	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3807-2.75	172	A-50BRBT-7	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3807-4	172	A-50BRBT-8	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3808-1.2	172	A-50BRBT-9	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3808-2	172	A-50BRBT-10	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3808-2.75	172	A-50BRBT-11	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3808-4	172	A-50BRBT-12	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3808-6	172	A-50BRBT-13	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3808-8	172	A-50BRBT-14	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3809-2.75	172	A-50BRBT-15	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3809-4	172	A-50BRBT-16	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3810-1.2	172	A-50BRBT-17	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3810-2	172	A-50BRBT-18	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3810-2.75	172	A-50BRBT-19	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3811-1.25	172	A-50BRBT-20	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3812-1.2	172	A-50BRBT-21	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3813-2.75	172	A-50BRBT-22	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3814-2.75	172	A-50BRBT-23	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3816-2.75	172	A-50BRBT-24	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3817-2.75	172	A-50BRBT-25	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3855-1.2	172	A-50BRBT-26	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3855-2.75	172	A-50BRBT-27	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A3855-4	172	A-50BRBT-28	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A38HM-3	173	A-50BRBT-29	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A38HM-4	173	A-50BRBT-30	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A38HM-6	173	A-50BRBT-31	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A38HM-8	173	A-50BRBT-32	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A38HM-10	173	A-50BRBT-33	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A350-2	173	A-50BRBT-34	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A351-2	173	A-50BRBT-35	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A351-2.75	173	A-50BRBT-36	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A351-3	173	A-50BRBT-37	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A351-3.5	173	A-50BRBT-38	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A351-4	173	A-50BRBT-39	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A351-6	173	A-50BRBT-40	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A352-1.2	173	A-50BRBT-41	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A352-1.6	173	A-50BRBT-42	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A353-2	173	A-50BRBT-43	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A353-2.75	173	A-50BRBT-44	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A316-2	173	A-50BRBT-45	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A317-2	173	A-50BRBT-46	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A317-2.75	173	A-50BRBT-47	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A317-3.5	173	A-50BRBT-48	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A317-6	173	A-50BRBT-49	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A318-2	173	A-50BRBT-50	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A319-2.75	173	A-50BRBT-51	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A31W1-3	173	A-50BRBT-52	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A31W1-4	173	A-50BRBT-53	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A31W2-2	173	A-50BRBT-54	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A31W2-3	173	A-50BRBT-55	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A31W2-4	173	A-50BRBT-56	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A31W2-6	173	A-50BRBT-57	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A31W2-8	173	A-50BRBT-58	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A31W2-10	173	A-50BRBT-59	143	ACA220-2500	149	AE-8010PS	134	AE34B 7000 Series HT Dual-Lever Tools	37
A31W2-12	173	A-50BRBT-60	143	ACA220-2500	149				

INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
AM5Z	170	ASH-250C-25MSZ	168	BJ10077	43	I		TW-5	165
AM-45	136	ASH-375C-15MSZ	168	BJ10078	43	IAC4E Series Gen IV Controller	11	TW-9	165
AM-65	136	ASH-375C-25MSZ	168	BJ10082	132	IB4E Series Gen IV Controller	12	TW-15	165
AMP-5	163	ASH-375Z	168	BJ10083	132	IB4E-Z Series Gen IV Controller	12	TW-22	165
AMPST-2-I	48	ASH-500C-15MSZ	110, 168	BJ10091	130	ICBL-4P	107	TW-30	165
AMPST-2-U	48	ASH-500C-25MSZ	110, 168	BPRASC Series 3arm	160	ICBL-4P	107	TW-40	165
AMPST-4-I	48	ASH-500Z	110, 168	BPRASM Series 3arm	160	ICBL-10P	107	TW-50	165
AMPST-4-U	48	ASTIS-25D-11	104	BP-T40-(B) (KIT)	118	ICBL-5000L	107	TW-60	165
AMPST-6-I	48	ASTIS-25D-28	104	BP-T40-RF8 (B) (KIT)	119	ICBL-8000DIG	107	TW-70	165
AMPST-6-U	48	ASTIS-38D-135	104	BP-T40D-(B) (KIT)	118	ICBL-USB	107		
AMPST-6S-I	48	ASTIS-50D-270	104	BP-T40D-RF8 (B) (KIT)	119	IE4E Series Gen IV Controller	11		
AMPST-6S-U	48	ASTIS-75D-1000	104	BP-T50-(B) (KIT)	118	IE4W1	41		
AMPST-8-I	48	ASTIS-100D-1700	104	BP-T50-RF8 (B) (KIT)	119	IE4W2	41	U-310SD	116
AMPST-8-IL	48	AT3-3	163	BP-T50D-(B) (KIT)	118	IE4WF	41	U-350D	116
AMPST-8-U	48	AT3-4	163	BP-T50D-RF8 (B) (KIT)	119	IP4	155	U-350SD	116
APM-30	136	AT3-6	163	BP-T60-(B) (KIT)	118	IP5	155	UA-40DMC	60
APTH-12ADP	98	AT3-9	163	BP-T60-RF8 (B) (KIT)	119	IP7	155	UA-40MC	60
APTH-12BLANK	98	AT5-3	163	BP-T60D-(B) (KIT)	118	IP8T	155	UA-40SDMC	60
APTH-120E7	98	AT5-4	163	BP-T60D-RF8 (B) (KIT)	119	IPC4E Series Gen IV Controller	12	UA-40SMC	60
APTH-120E8	98	AT5-6	163	BRH-1USD	141	IPT150	155	UA-50DMC	60
APTH-120E9	98	AT5-9	163	BRH-1UD	141	IP735	155	UA-50MC	60
APTH-120E10	98	AT5-12	163	BRH-1UR	141	ITVC	102	UA-50SDMC	60
APTH-120E11	98	ATC-10	82	BRH-1USR	141			UA-50SMC	60
APTH-120E12	98	ATC-25	82	BRH-5UD	141			UA-60MC	60
APTH-120E13	98	ATC-100	82	BRH-5USD	141			UA-60SDMC	60
APTH-120E14	98	ATC-150F	82	BRH-5USR	141			UA-60SMC	60
APTH-120E15	98	ATC-250	82	BRH-7(R,H)	141			UA-70MC	60
APTH-120E16	98	ATC-250F	82					UA-70SMC	60
APTH-120E17	98	ATC-500	82					UA-80MC	60
APTH-120E18	98	ATC-500F	82					UA-100MC	60
APTH-120E19	98	ATC-750	82					UA-130MC	60
APTH-120E20	98	ATC-750F	82					UA-150MC	60
APTH-120E50	98	ATC-1000	82					UA-400AMC	61
APTH-12RE50	98	ATC-1800	82					UA-500AMC	61
APTH-12RT25	98	ATDA	85					UA-600AMC	61
APTH-12RT38	98	ATDA-8000	86					UA-700AMC	61
APTH-12RT50	98	ATDA-8000-10-DCA(-TA)(-TP)	86					UA-800AMC	61
APTH-12SD25	98	ATDA-DC	85					UA-900AMC	61
APTH-12SD38	98	ATDBLIS	107					UA-1000AMC	61
APTH-12SD50	98	ATDBRIS	107					UA-1300AMC	61
APTH-14ADP	98	ATM-800	125					UAG-40SBL-136	139
APTH-14BLANK	98	ATM-1800	125					UAG-50SBL-109	139
APTH-140E1	98	ATM-2800	125					PLBM Series 3arm	159
APTH-140E13	98	ATM-3800	125					PLBS Series 3arm	159
APTH-140E14	98	ATM-5000	125					PSBM Series 3arm	159
APTH-140E15	98	ATM-8000	125					PSBS Series 3arm	159
APTH-140E16	98	ATM-12000	125					UAN-611R-30C	123
APTH-140E17	98	ATM-16000	125					UAN-611R-40C	123
APTH-140E18	98	ATN-3	163					UAN-611R-50C	123
APTH-140E19	98	ATN-5	163					UAN-611R-60C	123
APTH-140E21	98	ATW-50	164					UAN-701R-30C	123
APTH-140E22	98	ATW-0100F	97					UAN-701R-40C	123
APTH-140E24	98	ATW-0200F	97					UAN-701R-60C	123
APTH-140E25	98	ATW-0500F	97					UAT-30D	113
APTH-140E27	98	ATW-1000F	97					UAT-30SD	113
APTH-140E30	98	ATWL-250	94					UAT-40	113
APTH-140E32	98	ATWL-750	94					UAT-40D	113
APTH-140E34	98	ATWL-1000	94					UAT-40S	113
APTH-140E36	98	AUB-5	163					UAT-40SD	113
APTH-140E38	98	Audit Manager Software	88					UAT-50	113
APTH-140E41	98	AUET-10I(-DC)	83					UAT-50D	113
APTH-140E18	98	AUET-50I(-DC)	83					UAT-50DL	113
APTH-140E138	98	AUET-0100I(-DC)	83					UAT-50L	113
APTH-14RE32	98	AUET-250I(-DC)	83					UAT-50S	113
APTH-14RT34	98	AUET-500I(-DC)	83					UAT-50SD	113
APTH-14RT50	98	AUET-1000I(-DC)	83					UAT-50SL	113
APTH-14SD50	98	AUET-1200I(-DC)	83					UAT-60	113
APTW-25	98	AUET-1800I(-DC)	83					UAT-60D	113
APTW-50	98	AUET/MTM-10-100	83					UAT-60L	113
APTW-100	98	AUET/MTM-050-25	83					UAT-60S	113
APTW-150	98	AUET/MTM-50-250	83					UAT-60SL	113
APTW-200	98	AUET/MTM-50-500(-DC)	83					UAT-60SD	113
APTW-340	98	AUET/MTM-050-600	83					UAT-60SL	113
ARDFa-100(HD)(HDE)(HDS)	105	AUET/MTM-50-1000(-DC)	83					UAT-70	113
ARDFa-150(HD)(HDE)(HDS)	105	AUET/MTM-0100-050	83					UAT-70L	113
ARDFa-250(HD)(HDE)(HDS)	105	AUET/MTM-100-500	83					UAT-70S	113
ARDFa-500(HD)(HDE)(HDS)	105	AUET/MTM-100-1000	83					UAT-70SL	113
ARDFa-600(HD)(HDE)(HDS)	105	AUET/MTM-100-1200	83					UAT-80	113
ARDFa-750(HD)(HDE)(HDS)	105	AUET/MTM-100-1600(-DC)	83					UAT-90	113
ARDFa-10(HD)(HDE)(HDS)	105	AUET/MTM-100-2000	83					UAT-90L	113
ARDFa-25(HD)(HDE)(HDS)	105	AUET/MTM-250-1600	83					UAT-100	113
ARDFa-50(HD)(HDE)(HDS)	105	AUET/MTM-250-1800	83					UAT-100L	113
ARDFa-100(HD)(HDE)(HDS)	105	AUET/MTM-500-1200	83					UAT-130	113
ARDFa-150(HD)(HDE)(HDS)	105	AUET/MTM-500-2500(-DC)	83					UAT-150	113
ARDFa-250(HD)(HDE)(HDS)	105	AWC-5	163					UAT-180	113
ARDFa-350(HD)(HDE)(HDS)	105	AW3F	163					UAT-200	113
ARDFa-500(HD)(HDE)(HDS)	105	AW3FNF	164					UAT-200L	113
ARDFa-750(HD)(HDE)(HDS)	105	AW3FMS	163					UBX-AF(Z) Series	64
ARDFa-1000(HD)(HDE)(HDS)	105	AW6F	163					UBX-770	121
ARTIS-25H-2T(A)	103	AW6FNF	164					UCB-25	122
ARTIS-25H-5T(A)	103	AW6FMS	164					UCB-TA-CBL	122
ARTIS-25H-20T(A)	103	AW6S	163					UCC-100Z	69, 70
ARTIS-25S-10T(A)	103	AXD-2000	40					UD-50-22	140
ARTIS-38S-75T(A)	103	AXD-2000B	40					UD-50-45	140
ARTIS-50S-180T(A)	103							UD-50-200	140
ARTIS-75S-250T(A)	103							UD-50S-22	140
ARTIS-75S-500T(A)	103							UD-50S-45	140
ARTIS-100S-1400T(A)	103							UD-50S-45A	140
ARTIS-25H-10T(A)	103							UD-50S-45A*	140
ARTIS-25S-20T(A)	103							UD-60-04	140
ARTIS-38S-25T(A)	103							UD-60-07	140
ARTIS-100S-750T(A)	103							UD-60-15	140
ASB-0C	165							UD-60-20	140
ASB-3C	165							UD-60S-15	140
ASB-5C	165							UD-60S-29C	140
ASBM Series 3arm	159							UD-80-04	140
ASBS Series 3arm	159								
ASC-3	163								
ASC-5	163								
ASH-250C-10MSZ	168								
ASH-250C-15MSZ	168								

INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
UD-80-07	140	URW-6	123	Numbers		459-885-1	128		
UD-80-12	140	URW-8	123			496-088-1	128		
UDP-A100MC	62	URW-8N	123	0007.08	72	500-SZ	110, 169		
UDP-A120MC	62	URW-9N	123	1AM1DS Series 3arm	158	7021	169		
UDP-A600LMC	62	URW-10N	123	15N1DS Series 3arm	158	7021AG	169		
UDP-A700MC	62	URW-12N	123	209P-6-4	169	7041A	169		
UDP-TA40 (B)	122	US-3.5ACB	129	209P-8-6	169	7041AG	169		
UDP-TA40 (B-TL)	122	US-3.5B	129	222P-6-4	169	7051	169		
UDP-TA40D (B)	122	US-5	129	222P-8-6	169	852-644-1 KIT	72		
UDP-TA40D (B-TL)	122	US-6W	129	222P-12-8	169	852-645-1 KIT	72		
UDP-TA50 (B)	122	US-350PW	129	250-RZ	169	852-669-1 KIT	72		
UDP-TA50 (B-TL)	122	US-450PW	129	250-SZ	169	909-749-0	62		
UDP-TA50D-B	122	US-450WB	129	20322	49	909-921-0	72		
UDP-TA50D (B-TL)	122	US-652PW	129	20400	47	910-517-0	72		
UDP-TA55 (B)	122	US-LD40P-08	129	20853	49	910-518-0	72		
UDP-TA55 (B-TL)	122	US-LD40P-15	129	21159	48	910-546-0	72		
UEC-4800(A)(TP)(TPA)	66, 70, 71	US-LD40P-21	129	21208	49	910-547-0	72		
UEC-5500	67, 70, 71	US-LD50P-05	129	21226	48, 133, 164	910-548-0	72		
UEC-F024H	73	US-LD50P-08	129	23575	49	910-567-0	62		
UEC-F060H	73	US-LD50P-17	129	23662	49	910-568-0	62		
UEC-F120H	73	US-LT10B	126	23730	48	910-569-0	62		
UEC-F300MII	74	US-LT20B-10	126	24320	46	910-618-0	122		
UEC-MKB	74	US-LT20B-18	126	24330	46	910-619-0	122		
UECP-4810(A)	68, 70, 71	US-LT30B-11	126	24924	49	910-623-0	72		
UFT-6	106	US-LT30B-11C	127	25265	49	910-625-0	62		
UFT-10	106	US-LT30B-17	126	25274	43	910-627-0	122		
UFT-16	106	US-LT30B-17C	127	25275	43	910-629-0	122		
UFT-24	106	US-LT30B-23	126	25276	43	910-807-0	62		
UFT-510	106	US-LT30BL-11	127	25277	43	910-808-0	62		
UFT-516	106	US-LT30BL-17	127	25278	43	910-809-0	62		
UG-20A-120	139	US-LT30BL-23	127	25289	43	910-810-0	62		
UG-20A-200	139	US-LT31PB-05	127	25291	43	911-023-0	72		
UG-25NA	139	US-LT31PB-11	127	25350	46	932-100-0	169		
UG-38N	139	US-LT31PB-17	127	25491	46, 47	932-110-0A	169		
UG-38NA	139	US-LT31PB-23	127	25501	49	934-150-0	128		
UG-38NL	139	US-LT40-03C	127	25518	46	934-201-0	128		
UG-38NS	139	US-LT40-05C	127	25646	46	976-379-0	128		
UG-45H	139	US-LT40-08C	127	25717	49	976-430-0	128		
UG-50S-200	139	US-LT40B-03C	127	25718	49	976-431-0	128		
UG-50S-200A	139	US-LT40B-05C	127	25843	49	976-432-0	128		
UG-60S-29	139	US-LT40B-08	126	26327	43	976-471-0	128		
UG-65EB	139	US-LT40B-08C	127	26328	43	976-472-0	128		
UG-65EBL	139	US-LT40B-15	126	26332	43	976-493-0	128		
UG-650EL	139	US-LT40B-15C	127	26336	43	976-504-0	128		
UG-1250L-72	139	US-LT40B-21	126	26337	43	976-515-0	128		
UGW-6N	124	US-LT40BL-08	127	26364	46	976-516-0	128		
UGW-8N	124	US-LT40BL-15	127	26394	49	976-517-0	128		
UL-30	114	US-LT41PB-08	127	26443	49	976-588-0	128		
UL-30D	114	US-LT41PB-15	127	26477	43	976-614-0	128		
UL-30S	114	US-LT41PB-21	127	26478	43	976-620-0	128		
UL-30SD	114	US-LT50B-05	126	26479	43	10C-840-1	119		
UL-40	114	US-LT50B-08	126	26568	49	10E-840-1	119		
UL-40D	114	US-LT50B-17	126	26570	49				
UL-40S	114	US-LT51PB-05	127	26594	46				
UL-40SD	114	US-LT51PB-08	127	26630	43				
UL-50	114	US-LT51PB-17	127	26700	46				
UL-50D	114	US-LT60P-03	127	26709	46				
UL-50S	114	US-LT60P-07	127	26800	43				
UL-50SD	114	US-LT60P-11	127	26810	43				
UL-60	114	UTM-1500A	117	26815	43				
UL-60D	114	UTM-1500E	117	26820	43				
UL-60S	114	UW-6CSHRK	138	26830	43				
UL-60SD	114	UW-6SLRDK	137	26840	43				
UL-70	114	UW-6SLRK	137	26885	43				
UL-70S	114	UW-6SSHRDK	137	26890	43				
UL-80	114	UW-6SSHRK	137	26934	46				
UL-90	114	UW-6SSLRDK	137	27045	43				
UL-100	114	UW-6SSRK	137	27110	46				
UL-130	114	UW-8SHRK	137	27115	46				
UL-150	114	UW-9SRK	137	27122	46				
ULT-40C	115	UW-10SHRK	137	27200	43				
ULT-50C	115	UW-13CSK	138	27210	46				
ULT-60C	115	UW-13SRK	137	27255	43				
ULT-70C	115	UW-13SSK	137	27348	46				
ULT-70CH	115	UW-61ERK	137	27370	46				
ULT-150	115	UW-75S	138	27594	49				
ULT-180	115	UW-131ERK	137	27768	110				
UNR-F015-25NTC	76	UW-140P(WR)	138	27769	110				
UNR-F015-45NT	75	UW-220P	138	27771	110				
UNR-F015-55NTC	76	UW-220PL	138	27791	49				
UNR-F015-65NT	75	UW-251P	138	27816	49				
UNR-F015-200NT	75	UW-381	138	28050	42				
UNR-F015-280NT	75	UW-381L	138	28161	110				
UNR-F015-350NT	75	UW-381P	138	28162	110				
UNR-F050-95NTC	76	UW-401	137	28163	110				
UNR-F050-130NTC	76	UW-401L	137	28164	110				
UNR-F050-270NT	75	UW-550	138	28178	108, 167				
UNR-F050-630NT	75	UW-ST65HK	138	28292	46				
UNR-F050-730NT	75	UX-500C	116	28475	49				
UNR-F050-880NT	75	UX-612C	116	28480	42				
UNR-F050-1400NT	75	UX-700C	116	28489	48				
UNR-F100-200NTC	76	UX-800C	116	28514	43				
UNR-F100-250NTC	76	UX-900S	116	28549	43				
UNR-F100-380NTC	76	UX-1000C	116	28622	49				
UNR-F100-550NTC	76	UX-1000S	116	28796	110, 168				
UNR-F100-1300NT	75	UX-1300S	116	28843	28				
UNR-F100-1900NT	75	UXR-1820MC	62	28859	47				
UNR-F100-2500NT	75	UXR-2000	116	375-RZ	169				
UNR-F100-3700NT	75	UXR-2000MC	62	375-SZ	169				
UNR-F100-5400NT	75	UXR-2000S	116	30300	43				
UNR-F100-7000NT	75	UXR-2400S	116	30303	43				
UNR-F100-10000NT	75	UXR-2400SMC	62	30306	43				
UOW-11-10	124	UXR-3000S	116	30340	49				
UOW-11-14	124	UXR-T2400S	116	30351	49				
UOW-11-22	124	UXR-T3000S	116	30355	46				
UOW-11-30	124	UX-ST800	116	30850	47				
UOW-T60-10	124			31273	43				
UOW-T60-14	124			4H2055	136				
UOW-T60-22	124			408-088-2	128				
UOW-T60-30	124			408-885-0	128				
UP-25DB	140			455-885-1	128				
		W							
		WSCH	163						

AIMCO CORPORATE HEADQUARTERS

10000 SE Pine Street
Portland, Oregon 97216
Phone: (503) 254-6600
Toll Free: 1-800-852-1368

AIMCO CORPORATION DE MEXICO SA DE CV

Ave. Cristobal Colon 14529
Chihuahua, Chihuahua. 31125
Phone: (01-614) 380-1010
Fax: (01-614) 380-1019



www.AIMCO-GLOBAL.com

PRINTED IN THE U.S.A.

LIT-AT100, REV 04/13/21, ©2021 AIMCO